



A Product Line of Diodes Incorporated



FMMT591A

40V PNP MEDIUM POWER HIGH PERFORMANCE TRANSISTOR IN SOT23

Features


- BV_{CEO} > -40V
- I_C = -1A High Continuous Current
- I_{CM} = -2A Peak Pulse Current
- Low Saturation Voltage V_{CE(sat)} < -500mV @ -1A
- $R_{SAT} = 350 m\Omega$ for a Low Equivalent On-resistance
- Complementary NPN type: FMMT491A
- Totally Lead-Free & Fully RoHS compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- Qualified to AEC-Q101 Standards for High Reliability
- PPAP Capable (Note 4)

Mechanical Data

- Case: SOT23
- Case Material: Molded Plastic, "Green" Molding Compound UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 (3)
- Weight: 0.008 grams (approximate)

Application

- Power MOSFET gate driving
- Low loss power switching

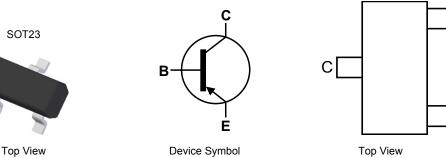

Pin-Out

E

B

Ordering Information (Notes 4 & 5)

Product	Compliance	Marking	Reel size (inches)	Tape width (mm)	Quantity per reel
FMMT591ATA	AEC-Q101	91A	7	8	3,000
FMMT591ATC	AEC-Q101	91A	13	8	10,000
FMMT591AQTA	Automotive	91A	7	8	3,000

1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.

2. See http://www.diodes.com/quality/lead_free.html for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.


3. Halogen and Antimony free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

4. Automotive products are AEC-Q101 qualified and are PPAP capable. Automotive, AEC-Q101 and standard products are electrically and thermally the same, except where specified. For more information, please refer to http://www.diodes.com/quality/product_compliance_definitions/.

For packaging details, go to our website at http://www.diodes.com/products/packages.html

Marking Information

Notes:







FMMT591A

Absolute Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V _{CBO}	-40	V
Collector-Emitter Voltage	V _{CEO}	-40	V
Emitter-Base Voltage	V _{EBO}	-7	V
Continuous Collector Current	Ιc	-1	A
Peak Pulse Current	ICM	-2	A
Base Current	IB	-200	mA
Peak Base Current	IBM	-1	A

Thermal Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit	
Power Dissipation	(Note 6)	PD	500	mW
Thermal Resistance, Junction to Ambient (Note 6)		R _{0JA}	250	°C/W
Thermal Resistance, Junction to Lead (Note 7)		R _{θJL}	197	°C/W
Operating and Storage Temperature Range	T _{J,} T _{STG}	-55 to +150	°C	

ESD Ratings (Note 8)

Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge - Human Body Model	ESD HBM	4,000	V	3A
Electrostatic Discharge - Machine Model	ESD MM	400	V	С

6. For a device mounted with the collector lead on 15mm x 15mm 1oz copper that is on a single-sided 1.6mm FR4 PCB; device is measured under still air Notes: conditions whilst operating in a steady-state.


Thermal resistance from junction to solder-point (at the end of the collector lead).
Refer to JEDEC specification JESD22-A114 and JESD22-A115.





Γk

Thermal Characteristics and Derating Information

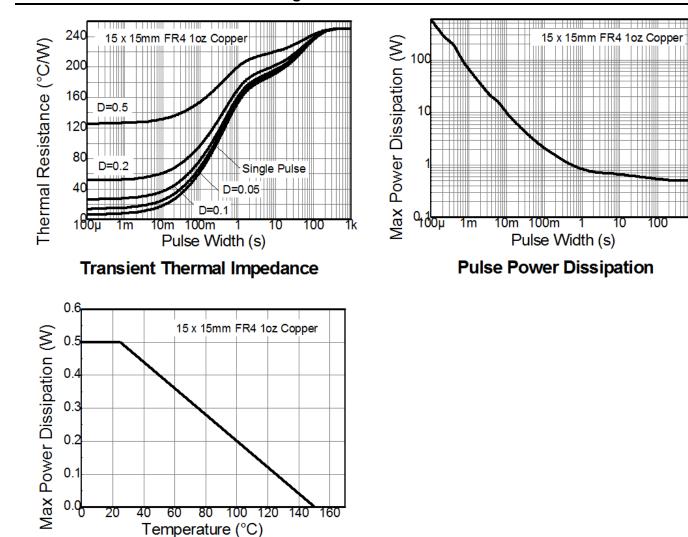

Derating Curve





FMMT591A

Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)


Characteristic		Symbol	Min	Тур	Max	Unit	Test Condition
Collector-Base Breakdown Voltage		BV _{CBO}	-40			V	$I_{\rm C} = -100\mu A$
Collector-Emitter Breakdown Voltage (Note 9)		BVCEO	-40	_	_	V	$I_{\rm C}$ = -10mA
Emitter-Base Breakdown	Voltage	BV _{EBO}	-7			V	I _E = -100μA
Collector Cutoff Current		I _{CBO}	_		-100	nA	$V_{CB} = -30V$
Collector-Emitter Cutoff C	Current	I _{CES}		_	-100	nA	V _{CES} = -30V
Emitter Cutoff Current		I _{EBO}			-100	nA	V _{EB} = -5.6V
Collector-Emitter Saturation Voltage (Note 9)		V _{CE(sat)}			-200 -350 -500	mV	I _C = -100mA, I _B = -1mA I _C = -500mA, I _B = -20mA I _C = -1A, I _B = -100mA
Base-Emitter Saturation Voltage (Note 9)		V _{BE(sat)}	_	_	-1.1	V	I _C = -1A, I _B = -100mA
Base-Emitter Turn-On Voltage (Note 9)		V _{BE(on)}		_	-1.0	V	I _C = -1A, V _{CE} = -5V
Static Forward Current Transfer Ratio (Note 9)		h _{FE}	300 300 250 160 30		 800 		$\begin{split} I_{C} &= -1 \text{mA}, \ V_{CE} &= -5 \text{V} \\ I_{C} &= -100 \text{mA}, \ V_{CE} &= -5 \text{V} \\ I_{C} &= -500 \text{mA}, \ V_{CE} &= -5 \text{V} \\ I_{C} &= -1 \text{A}, \ V_{CE} &= -5 \text{V} \\ I_{C} &= -2 \text{A}, \ V_{CE} &= -5 \text{V} \end{split}$
Transition Frequency		f _T	150	00	_	MHz	V _{CE} = -10V, I _C = -50mA, f = 100MHz
Output Capacitance		C _{obo}	_		10	pF	V _{CB} = -10V, f = 1MHz
Switching Time	Delay Time	t _(d)		34.9			
	Rise Time	t _(r)	_	19.2	—	ns	V _{CC} = -10V, I _C = -500mA,
	Storage Time	t _(s)		249		115	$I_{B1} = -I_{B2} = -25 \text{mA}$
	Fall Time	t _(f)		62			

Note: 9. Measured under pulsed conditions. Pulse width \leq 300 $\mu s.$ Duty cycle \leq 2%





Typical Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

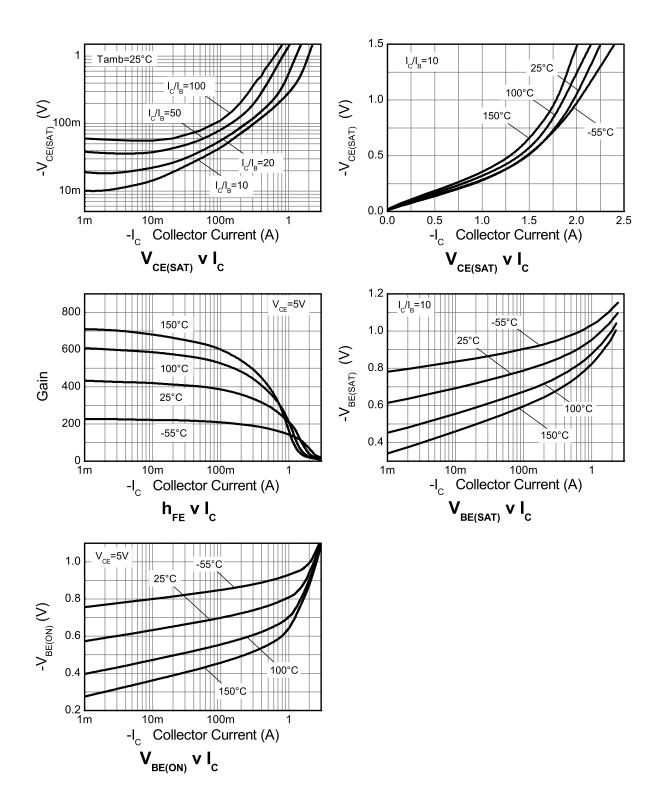






Package Outline Dimensions


Please see AP02002 at http://www.diodes.com/datasheets/ap02002.pdf for latest version.

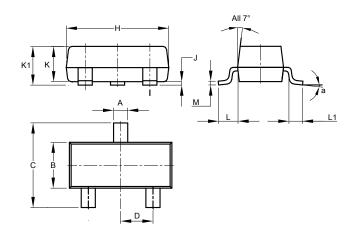

SOT23						
Dim	Min	Max	Тур			
Α	0.37	0.51	0.40			
В	1.20	1.40	1.30			
С	2.30	2.50	2.40			
D	0.89	1.03	0.915			
F	0.45	0.60	0.535			
G	1.78	2.05	1.83			
Н	2.80	3.00	2.90			
J	0.013	0.10	0.05			
К	0.890	1.00	0.975			
K1	0.903	1.10	1.025			
L	0.45	0.61	0.55			
L1	0.25	0.55	0.40			
М	0.085	0.150	0.110			
а	8°					
All	All Dimensions in mm					

Suggested Pad Layout

Please see AP02001 at http://www.diodes.com/datasheets/ap02001.pdf for the latest version.



Dimensions	Value (in mm)
Z	2.9
Х	0.8
Y	0.9
С	2.0
E	1.35





FMMT591A

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

- 1. are intended to implant into the body, or
- 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2013, Diodes Incorporated

www.diodes.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated: <u>FMMT591ATC</u> <u>FMMT591ATA</u> <u>FMMT591AQTA</u>