



#### **60V NPN MEDIUM POWER TRANSISTOR IN SOT23**

### **Description**

This Bipolar Junction Transistor (BJT) is designed to meet the stringent requirement of Automotive Applications.

### **Features**

- BV<sub>CEO</sub> > 60V
- Maximum Continuous Collector Current I<sub>C</sub> = 5A
- V<sub>CE(SAT)</sub> < 45mV @ 1A</li>
- R<sub>CE(SAT)</sub> = 25mΩ
- High Power Dissipation SOT23 (Type DN) Package
- High Peak Current
- Low Saturation Voltage
- 140V Forward Blocking Voltage
- Complementary Part Number ZXTP2027FQ
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- Qualified to AEC-Q101 Standards for High Reliability
- PPAP Capable (Note 4)

## **Mechanical Data**

- Case: SOT23
- Case Material: Molded Plastic. "Green" Molding Compound.
  UL Flammability Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208@3
- Weight: 0.008 grams (Approximate)


### **Applications**

- MOSFET and IGBT Gate Driving
- Motor Drive
- Relay, Lamp and Solenoid Drive






Top View



Device Symbol



Top View Pin-Out


### Ordering Information (Note 5)

Part Number	Compliance	Marking	Reel Size (inches)	Tape Width (mm)	Quantity per Reel
ZXTN2018FQTA	Automotive	851	7	8	3,000

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 4. Automotive products are AEC-Q101 qualified and are PPAP capable. Refer to https://www.diodes.com/quality/.
- 5. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/

## **Marking Information**



851 = Product Type Marking Code YM = Date Code Marking Y = Year ex: G = 2019 M = Month ex: 9 = September

Date Code Key

Date Code Rey												
Year	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
Code	F	G	Н	I	J	K	L	М	N	0	Р	Q
Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	0	N	D



# Absolute Maximum Ratings (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V <sub>CBO</sub>	140	V
Collector-Emitter Voltage	V <sub>CEV</sub>	140	V
Collector-Emitter Voltage	V <sub>CEO</sub>	60	V
Emitter-Base Voltage	V <sub>EBO</sub>	7	V
Continuous Collector Current	Ic	5	Α
Base Current	I <sub>B</sub>	1	Α
Peak Pulse Current	I <sub>CM</sub>	12	Α

# Thermal Characteristics ( $@T_A = +25^{\circ}C$ , unless otherwise specified.)

Characteristic	Symbol	Value	Unit		
	(Note 6)		1.0 8.0		
Power Dissipation Linear Derating Factor	(Note 7)	$P_{D}$	1.2 9.6	W mW/°C	
	(Note 8)		1.56 12.5		
	(Note 6)		125		
Thermal Resistance, Junction to Ambient	(Note 7)	$R_{ heta JA}$	104	°C/W	
	(Note 8)		80		
Operating and Storage Temperature Range	Operating and Storage Temperature Range			°C	

# ESD Ratings (Note 9)


Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge - Human Body Model	ESD HBM	4,000	V	3A
Electrostatic Discharge - Machine Model	ESD MM	400	V	С


#### Notes:


- 6. For a device mounted with the collector lead on 18mm × 18mm 2oz copper that is on a single-sided 1.6mm FR-4 PCB; device is measured under still air conditions whilst operating in steady-state.
- 7. Same as note (6), except the device is mounted on  $30\text{mm} \times 30\text{mm}$  2oz copper. 8. Same as note (6), except measured at t < 5 seconds. 9. Refer to JEDEC specification JESD22-A114 and JESD22-A115.




## Thermal Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)










**Transient Thermal Impedance** 

**Pulse Power Dissipation** 






# Electrical Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV <sub>CBO</sub>	140	180	_	V	$I_C = 100\mu A$
Collector-Emitter Breakdown Voltage	BV <sub>CEV</sub>	140	180	_	V	$I_C = 1\mu A$ , $-1V < V_{BE} < +0.3V$
Collector-Emitter Breakdown Voltage (Note 10)	BV <sub>CEO</sub>	60	80	_	V	$I_C = 10mA$
Emitter-Base Breakdown Voltage	$BV_EBO$	7	8	_	V	$I_E = 100\mu A$
Collector-Base Cutoff Current	I <sub>CBO</sub>	_	< 1	50	nA	V <sub>CB</sub> = 110V
Collector-Emitter Cutoff Current	I <sub>CEV</sub>	_	< 1	100	nA	$V_{CB} = 110V, V_{BE} = -1V$
Emitter-Base Cutoff Current	I <sub>EBO</sub>	_	< 1	10	nA	$V_{EB} = 6V$
		100	220	_		$I_C = 10$ mA, $V_{CE} = 1$ V
Static Forward Current Transfer Datic (Note 10)	L	100	200	300		$I_C = 2A$ , $V_{CE} = 1V$
Static Forward Current Transfer Ratio (Note 10)	h <sub>FE</sub>	40	65	_	_	I <sub>C</sub> = 5A, V <sub>CE</sub> = 1V
		15	25	_		I <sub>C</sub> = 10A, V <sub>CE</sub> = 1V
	VCE(SAT)	_	15	30	mV	$I_C = 0.1A, I_B = 5mA$
		_	35	45		$I_C = 1A$ , $I_B = 100mA$
Collector Emitter Seturation Voltage (Note 10)		_	40	55		$I_C = 1A$ , $I_B = 50mA$
Collector-Emitter Saturation Voltage (Note 10)		_	85	110	IIIV	$I_C = 2A$ , $I_B = 50mA$
		_	145	170		$I_C = 5A$ , $I_B = 250mA$
		_	170	210		$I_C = 6A, I_B = 300mA$
Base-Emitter Saturation Voltage (Note 10)	V <sub>BE(SAT)</sub>	_	0.92	1.00	V	$I_C = 5A$ , $I_B = 250mA$
Base-Emitter Saturation Voltage (Note 10)	V <sub>BE(ON)</sub>	_	0.85	0.95	V	$I_C = 5A$ , $V_{CE} = 1V$
Output Capacitance	C <sub>OBO</sub>	_	28	_	pF	V <sub>CB</sub> = 10V, f = 1MHz
Transition Frequency	f⊤	_	130	_	MHz	V <sub>CE</sub> = 10V, I <sub>C</sub> = 100mA, f = 50MHz
Turn-On Time	ton	_	33	_	ns	$V_{CC} = 10V, I_{C} = 1A,$
Turn-Off Time	toff	_	668	_	ns	$I_{B1} = -I_{B2} = 100 \text{mA}$

Note: 10. Measured under pulsed conditions. Pulse width  $\leq$  300 $\mu$ s. Duty cycle  $\leq$  2%.



# Typical Electrical Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)

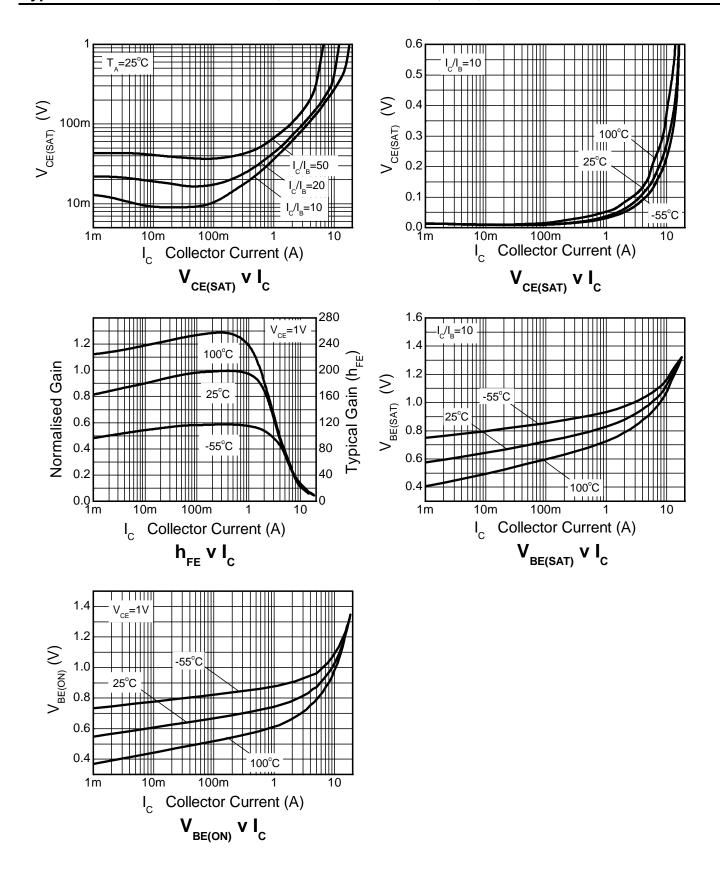




# **Package Outline Dimensions**

Please see http://www.diodes.com/package-outlines.html for the latest version.

#### SOT23 (Type DN)

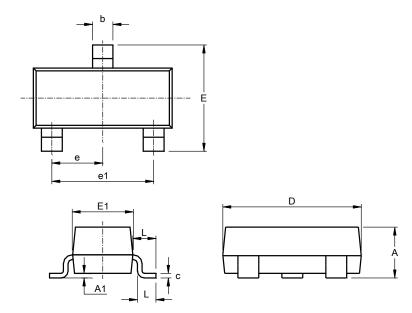


SOT23 (Type DN)						
Dim	Min Max Typ					
Α	0.89	1.12	1.00			
A1	0.01	0.10	0.05			
b	0.30	0.51	0.45			
C	0.08	0.20	0.10			
D	2.80	3.04	3.00			
Е	2.10	2.64	2.42			
E1	1.20	1.40	1.37			
е	0.95 REF					
e1	1.90 REF					
L	0.25	0.60	0.30			
L1	0.45	0.62	0.54			
All Dimensions in mm						

# Suggested Pad Layout

Please see http://www.diodes.com/package-outlines.html for the latest version.

## SOT23 (Type DN)



Dimensions	Value (in mm)
С	2.0
Х	0.8
X1	1.35
Υ	0.9
Y1	2.9



#### IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2019, Diodes Incorporated

www.diodes.com

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated: ZXTN2018FQTA