

Technical Data Sheet

Chip LEDs with Bi-Color(Multi-Color)

19-226/R6GHC-A01/2T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mulit-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions


- The 19-226 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

	T C. 1			
Type	pe Material Emitted Color		Lens Color	
R6	AlGaInP	Brilliant Red	W. Cl	
GH	InGaN	Brilliant Green	Water Clear	



Everlight Electronics Co., Ltd. http://www.everlight.com


Device No:DSE-926-011

Prepared date: 27-Jul-2005 Prepared by: Ashley Kuo

Rev 1

Page: 1 of 11

Package Outline Dimensions

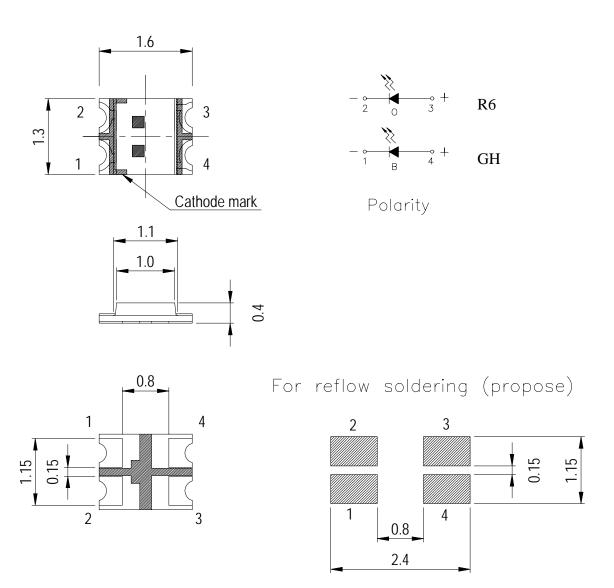

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm



Absolute Maximum Ratings (Ta=25 $^{\circ}$ C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	IF	R6:25 GH:25	mA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$	
Soldering Temperature	Tsol	260 (for 5 seconds)	$^{\circ}\!\mathbb{C}$	
Electrostatic Discharge(HBM)	ESD	R6:2000 GH:150	V	
Power Dissipation	Pd	R6:60 GH:110	mW	
Peak Forward Current (Duty 1/10 @1KHz)	IFP	R6:60 GH:100	mA	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.		

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 3 of 11




Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)

Parameter	Symbol		Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	R6 GH	80 100	110 130		mcd	I _F =20mA
Viewing Angle	2θ	1/2		120		deg	I _F =20mA
Peak Wavelength	λρ	R6 GH		632 518		nm	I _F =20mA
Dominant Wavelength	λd	R6 GH	615 510		630 540	nm	I _F =20mA
Spectrum Radiation Bandwidth	Δλ	R6 GH		20 20		nm	I _F =20mA
Forward Voltage	VF	R6 GH		2.0 3.3	2.4 3.9	V	I _F =20mA
Reverse Current	Ir	R6 GH			10 50	μ A	V _R =5V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 4 of 11

Typical Electro-Optical Characteristics Curves

R6

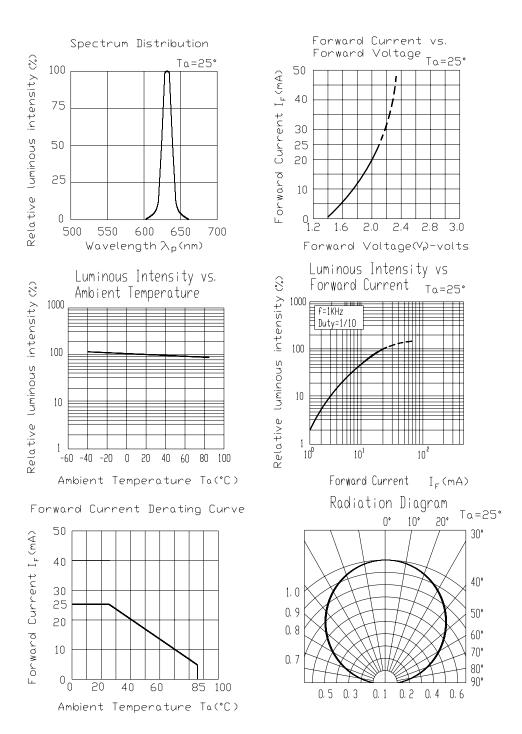

EVERLIGHT ELECTRONICS CO.,LTD.

19-226/R6GHC-A01/2T

80°


Page: 6 of 11

0.4 0.6

Prepared by: Ashley Kuo

Typical Electro-Optical Characteristics Curves

GH

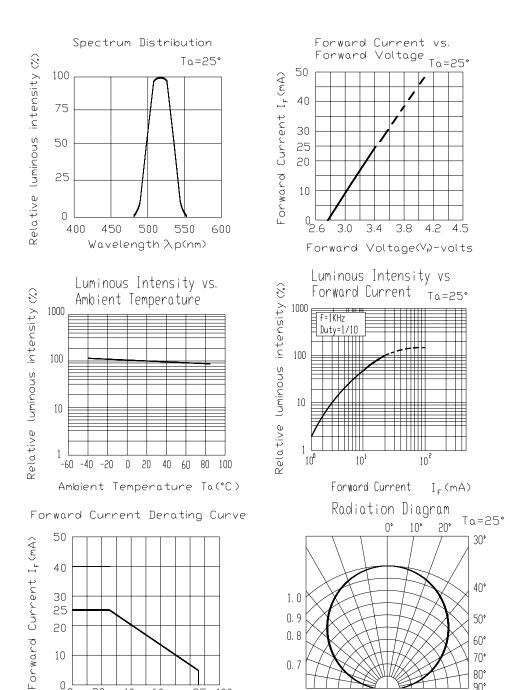

0. 7

0.3

0.5

0. 1 0. 2

Rev 1

100

http://www.everlight.com

Prepared date: 27-Jul-2005

00

40


Ambient Temperature Ta(°C)

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

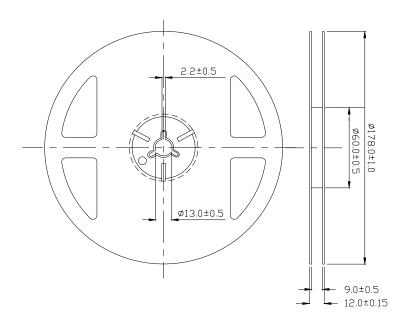

Note: The tolerances unless mentioned is ±0.1mm, Unit

Everlight Electronics Co., Ltd. Device No:DSE-926-011

http://www.everlight.com


Rev 1

Page: 7 of 11

Prepared date: 27-Jul-2005


Prepared by: Ashley Kuo

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

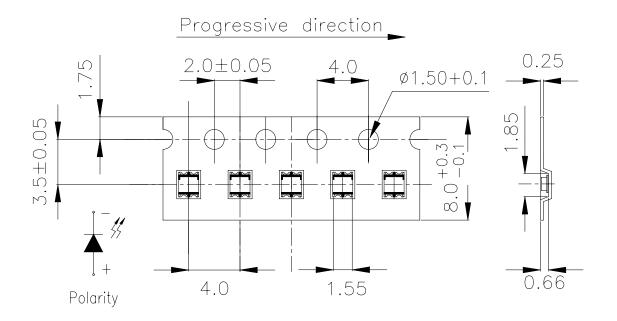

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

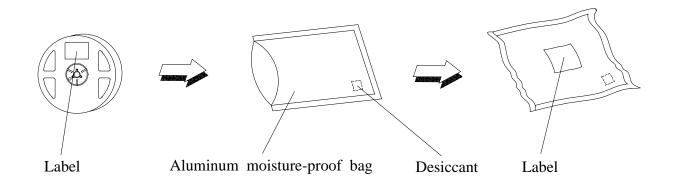

Everlight Electronics Co., Ltd. Device No:DSE-926-011

http://www.everlight.com Prepared date: 27-Jul-2005

Prepared by: Ashley Kuo

Page: 8 of 11

Rev 1



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°ℂ	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 9 of 11

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

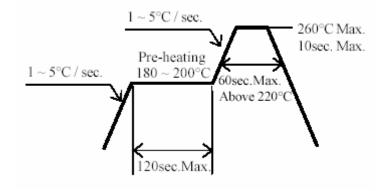

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 10 of 11




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

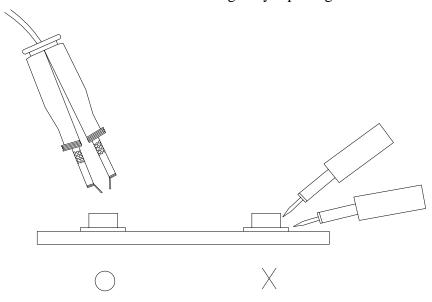

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 11 of 11