General Information





The new 9276 series connector provides a guick and reliable wire-to-board termination in a sleek 2.5mm pitch SMT package for a broad range of industrial and commercial markets. With almost every product on the market today having to deal with a small number of discrete wires to connect components to a board, the 9276 series connectors meets this challenge by simply stripping the wire and inserting them into the connector. This makes the connector very termination friendly within the factory as well as in the field by electrical installers. Developed for harsh industrial and Solid State Lighting (SSL) applications, the connector was designed with a high spring force Beryllium Copper upper spring contact to accept a wide range (18-26 AWG solid or stranded) of wire to meet multiple applications with a single connector. By incorporating a dual-contact design we were able to maximize current rating (6 Amps) and minimize PCB space. For example, the 4p connector has a footprint of 90 sq-mm while competing products are 160 sq-mm. The dual-contact design also provides two solder points for each wire eliminating the need for external anchor tabs. KYOCERA AVX provides a small insertion / extraction tool which will allow the wires to easily be replaced up to 5 times.

APPLICATIONS

- · Connecting discrete wire components directly to the PCB
- Bringing power and signals onto a PCB
- Daisy chaining PCB's together to create a continuous string of boards
- Application notes: refer to 201-01-127

FEATURES AND BENEFITS

- Simple strip, insert and removal design
- SMT RoHS termination to the PCB with minimal footprint
- Accepts 18-26 AWG Solid and Stranded wires
- Expanded size offering to maximize application potential; 1, 2, 3, 4, 6 & 8 positions
- High spring force top contact provides a lance type retention to capture and retain the wire
- Available in standard white and optional black color

ELECTRICAL

- Current Rating: 6 Amps / Contact
- Voltage Rating: 300 VAC

ENVIRONMENTAL

· Operating Temperature: -40°C to +125°C

MECHANICAL

Insulator Material: Glass-Filled Nylon 46; UL94V0

Х

- Contact Material: Beryllium Copper / Phosphor Bronze
- Plating: Tin over Nickel
- · Replaceability: 5 Cycles

HOW TO ORDER

00 Wire to Board Connector	OOX Number of Ways			Horizontal	21 Wire Gauge Size			
	Code	No of Ways	Details	Mountin Coo	de	Accepted Wire Gauge	Max Conductor	Max Insulation
	001	1	Page 78	01	1	18-26 AWG	1.20mm	2.10mm
	002	2	Page 79	21	1	Solid or Standed	Diameter	Diameter
	003	3	Page 80					
	004	4	Page 81					
	006	6	Page 82					
	008	8	Page 83					
	Jeries	Code 001 002 003 004 006	Code No of Ways 001 1 002 2 003 3 004 4 006 6	Code No of Ways Details 001 1 Page 78 002 2 Page 79 003 3 Page 80 004 4 Page 81 006 6 Page 82	Code No of Ways Details Mountin 001 1 Page 78 2 002 2 Page 79 2 003 3 Page 80 2 004 4 Page 81 006 6	Code No of Ways Details Mountin 001 1 Page 78 21 002 2 Page 79 21 003 3 Page 80 21 006 6 Page 82 21	Code No of Ways Details Mountin 001 1 Page 78 18-26 AWG 002 2 Page 79 21 18-26 AWG 003 3 Page 80 Solid or Standed 004 4 Page 82 Accepted Wire	Code No of Ways Details 001 1 Page 78 002 2 Page 79 003 3 Page 80 004 4 Page 81 006 6 Page 82

06 Insulator Color Plating 9 = UL White Option 8 = UL Black 06 = Pure Tin all Over



Certification: UL File #E90723

Wire Assembly/Wire Extraction



WIRE ASSEMBLY

FOR FURTHER DETAILS REFER TO APPLICATION NOTES 201-01-127




TRIM INSULATION. DO NOT CRUSH CENTER OF WIRE. STRANDED WIRES TWISTED TOGETHER BEFORE INSERTION. CHECK ALL STANDS OF WIRE ARE CORRECTLY ALIGNED AFTER THE INSULATION IS REMOVED.

PUSH WIRE INTO HOLE IN FRONT OF CONNECTOR DO NOT BEND CONNECTOR

CONTINUED TO PUSH WIRE UNTIL STOP IS REACHED.

WIRE EXTRACTION

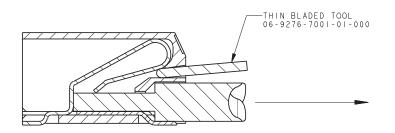


PUSH BLADE (NOT SHARP) INTO SLOT ABOVE WIRE. WHEN WIRE IS FREE, PULL TO EXTRACT.

KUDEERA The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

1 Position



1 WAY WIRE TO BOARD CONNECTOR

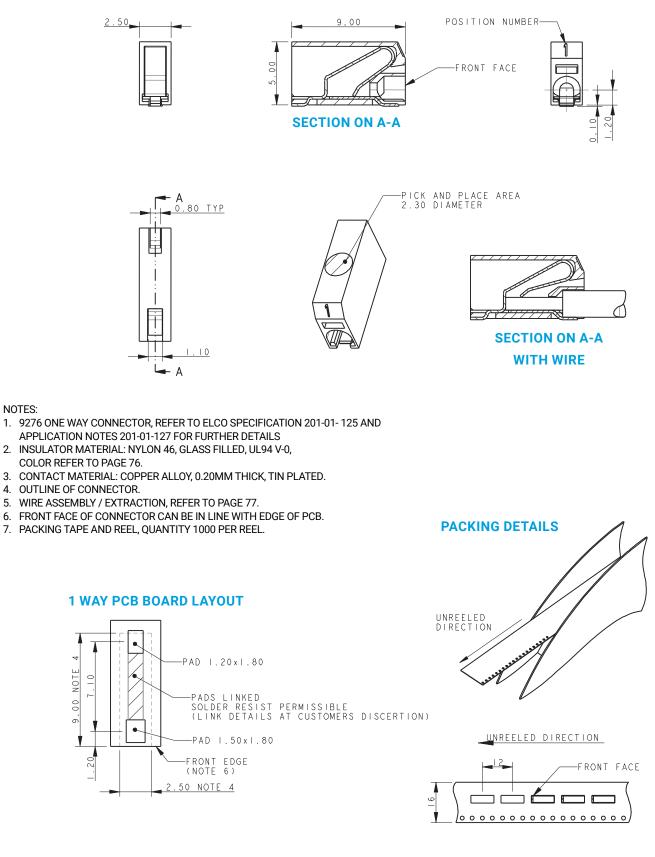


KUCCERA AVV/C The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

2 Position

NOTES:



2 WAY WIRE TO BOARD CONNECTOR

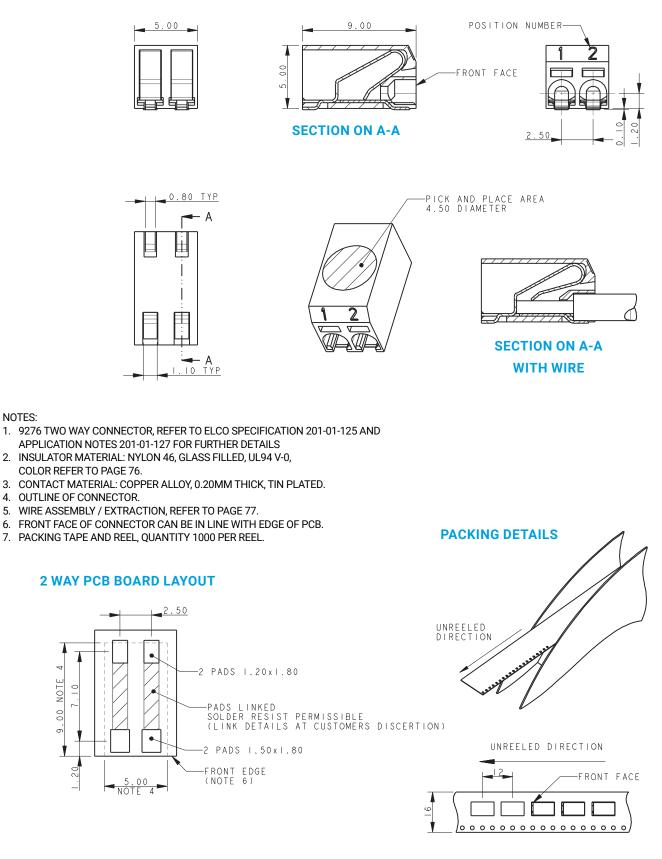

KUDEERE | The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.


3 Position

NOTES:

4



3 WAY WIRE TO BOARD CONNECTOR

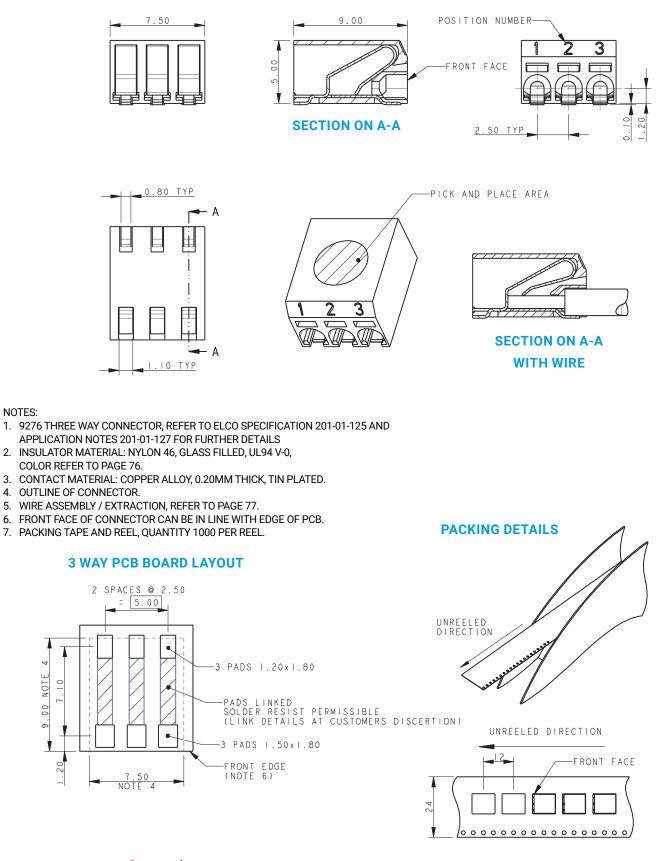

KUDERR | The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order. /avax

090721

4 Position

NOTES:

3.

NOTE 0

00

6


1.20

.


10.00 NOTE 4

KY<u>OCERa</u>

4 WAY WIRE TO BOARD CONNECTOR

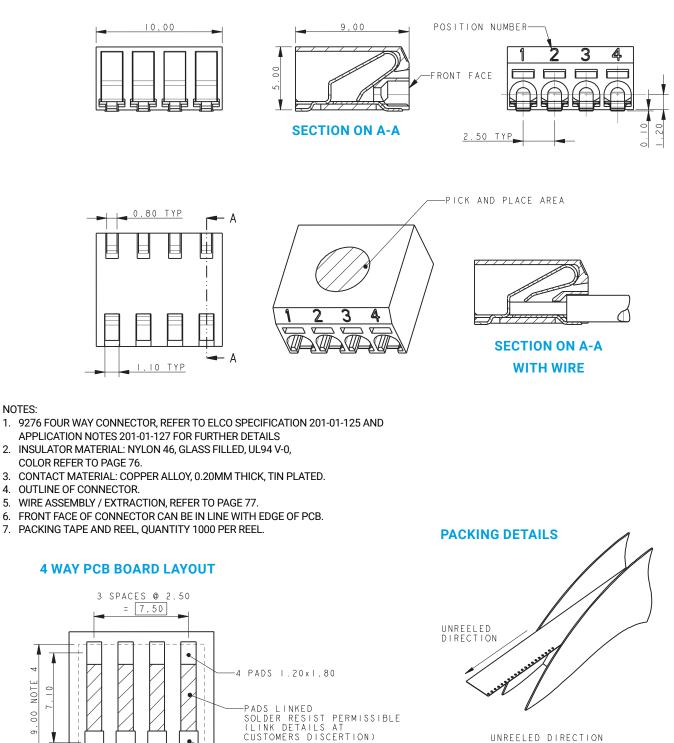

UNREELED DIRECTION



KUDEERE | The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order. 1:000


4 PADS 1.50x1.80

-FRONT EDGE (NOTE 6)


6 Position



6 WAY WIRE TO BOARD CONNECTOR

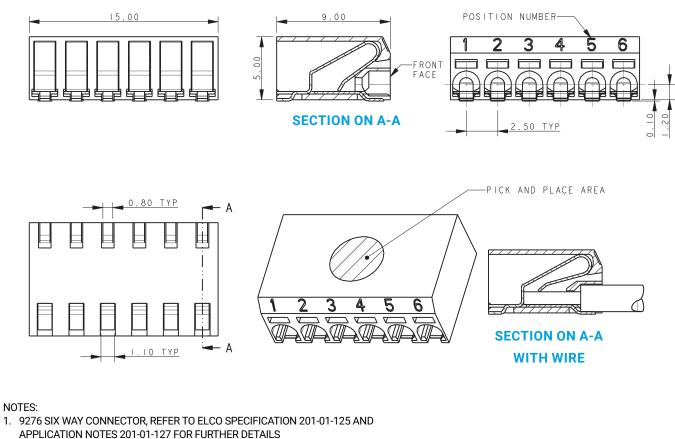

- INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

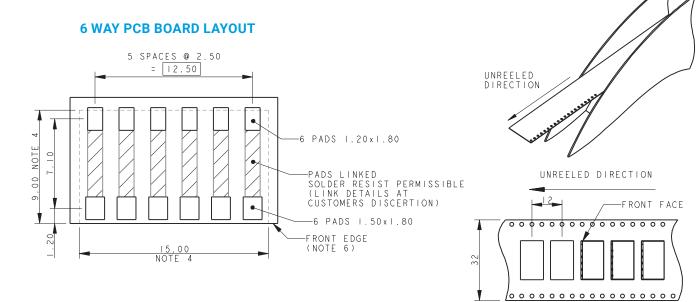


PACKING DETAILS

The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

090721

8 Position




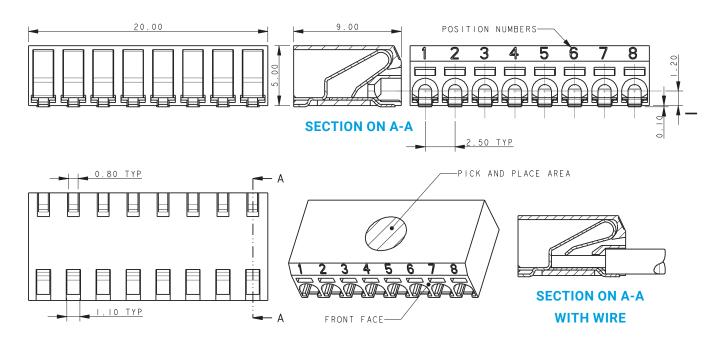


NOTES:

- 1. 9276 EIGHT WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01- 125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

8 WAY PCB BOARD LAYOUT

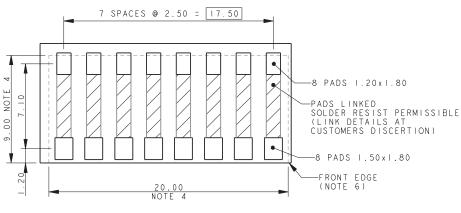



KY<u>OCERa</u>

UNREELED DIRECTION

0 0 0 0 0 0

0 0 0 0 0

0000

KUDEERA AV//C available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.