



# FGA90N30



## 300V PDP IGBT

### Features

- High Current Capability
- Low saturation voltage:  $V_{CE(sat)}$ , Typ = 1.1V@  $I_C = 20A$
- High Input Impedance

### Description

Employing Unified IGBT Technology, FGA90N30 provides low conduction and switching loss. FGA90N30 offers the optimum solution for PDP applications where low conduction loss is essential.



### Absolute Maximum Ratings $T_C = 25^\circ\text{C}$ unless otherwise noted

Symbol	Description	FGA90N30	Units
$V_{CES}$	Collector-Emitter Voltage	300	V
$V_{GES}$	Gate-Emitter Voltage	$\pm 30$	V
$I_C$	Collector Current	@ $T_C = 25^\circ\text{C}$	90
$I_{CM}$	Pulsed Collector Current (Note 1)	@ $T_C = 25^\circ\text{C}$	220
$P_D$	Maximum Power Dissipation	@ $T_C = 25^\circ\text{C}$	219
	Maximum Power Dissipation	@ $T_C = 100^\circ\text{C}$	87
$T_J$	Operating Junction Temperature	-55 to +150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55 to +150	$^\circ\text{C}$
$T_L$	Maximum Lead Temp. for soldering Purposes, 1/8" from case for 5 seconds	300	$^\circ\text{C}$

**Notes:**

(1) Repetitive test , pulse width = 100usec , Duty = 0.2

\*  $I_{c\_pulse}$  limited by max  $T_J$

### Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Units
$R_{\theta JC}(IGBT)$	Thermal Resistance, Junction-to-Case for IGBT	--	0.57	$^\circ\text{C}/\text{W}$
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	--	40	$^\circ\text{C}/\text{W}$

## Package Marking and Ordering Information


Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FGA90N30	FGA90N30	TO-3P	--	--	30

## Electrical Characteristics of the IGBT T<sub>C</sub> = 25°C unless otherwise noted


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
<b>Off Characteristics</b>						
BV <sub>CES</sub>	Collector-Emitter Breakdown Voltage	V <sub>GE</sub> = 0V, I <sub>C</sub> = 250μA	300	--	--	V
ΔB <sub>V<sub>CES</sub></sub> / ΔT <sub>J</sub>	Temperature Coefficient of Breakdown Voltage	V <sub>GE</sub> = 0V, I <sub>C</sub> = 250μA	--	0.6	--	V/°C
I <sub>CES</sub>	Collector Cut-Off Current	V <sub>CE</sub> = V <sub>CES</sub> , V <sub>GE</sub> = 0V	--	--	100	μA
I <sub>GES</sub>	G-E Leakage Current	V <sub>GE</sub> = V <sub>GES</sub> , V <sub>CE</sub> = 0V	--	--	± 250	nA
<b>On Characteristics</b>						
V <sub>GE(th)</sub>	G-E Threshold Voltage	I <sub>C</sub> = 250μA, V <sub>CE</sub> = V <sub>GE</sub>	2.5	4.0	5.0	V
V <sub>CE(sat)</sub>	Collector to Emitter Saturation Voltage	I <sub>C</sub> = 20A, V <sub>GE</sub> = 15V	--	1.1	1.4	V
		I <sub>C</sub> = 90A, V <sub>GE</sub> = 15V	--	1.9	--	V
		I <sub>C</sub> = 90A, V <sub>GE</sub> = 15V, T <sub>C</sub> = 125°C	--	2.0	--	V
<b>Dynamic Characteristics</b>						
C <sub>ies</sub>	Input Capacitance	V <sub>CE</sub> = 30V, V <sub>GE</sub> = 0V, f = 1MHz	--	1700	-	pF
C <sub>oes</sub>	Output Capacitance		--	290	-	pF
C <sub>res</sub>	Reverse Transfer Capacitance		--	80	-	pF
<b>Switching Characteristics</b>						
t <sub>d(on)</sub>	Turn-On Delay Time	V <sub>CC</sub> = 200V, I <sub>C</sub> = 20A, R <sub>G</sub> = 10Ω, V <sub>GE</sub> = 15V, Resistive Load, T <sub>C</sub> = 25°C	--	30	--	ns
t <sub>r</sub>	Rise Time		--	200	--	ns
t <sub>d(off)</sub>	Turn-Off Delay Time		--	110	--	ns
t <sub>f</sub>	Fall Time		--	140	300	ns
E <sub>on</sub>	Turn-On Switching Loss		--	0.15	--	mJ
E <sub>off</sub>	Turn-Off Switching Loss		--	0.45	--	mJ
E <sub>ts</sub>	Total Switching Loss		--	0.6	--	mJ
t <sub>d(on)</sub>	Turn-On Delay Time	V <sub>CC</sub> = 200V, I <sub>C</sub> = 20A, R <sub>G</sub> = 10Ω, V <sub>GE</sub> = 15V, Resistive Load, T <sub>C</sub> = 125°C	--	30	--	ns
t <sub>r</sub>	Rise Time		--	210	--	ns
t <sub>d(off)</sub>	Turn-Off Delay Time		--	110	--	ns
t <sub>f</sub>	Fall Time		--	200	--	ns
E <sub>on</sub>	Turn-On Switching Loss		--	0.16	--	mJ
E <sub>off</sub>	Turn-Off Switching Loss		--	0.72	--	mJ
E <sub>ts</sub>	Total Switching Loss		--	0.88	--	mJ
Q <sub>g</sub>	Total Gate Charge	V <sub>CE</sub> = 200V, I <sub>C</sub> = 20A, V <sub>GE</sub> = 15V	--	87	130	nC
Q <sub>ge</sub>	Gate-Emitter Charge		--	12	18	nC
Q <sub>gc</sub>	Gate-Collector Charge		--	38	57	nC

## Typical Performance Characteristics


**Figure 1. Typical Output Characteristics**

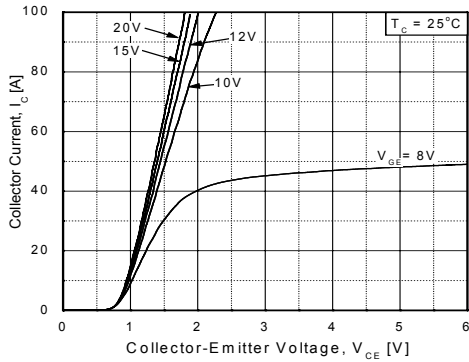


**Figure 2. Typical Output Characteristics**

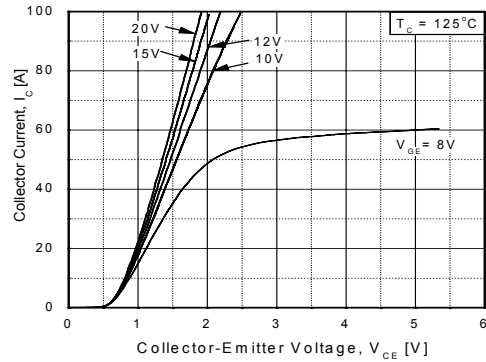


**Figure 3. Typical Saturation Voltage Characteristics**

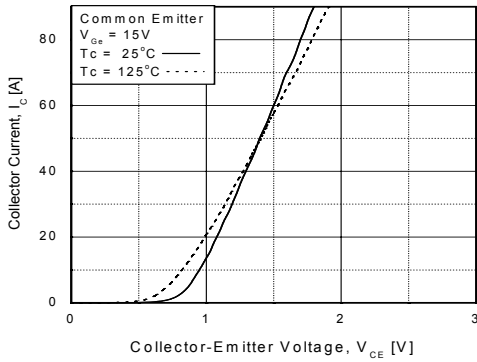


**Figure 4. Transfer characteristics**

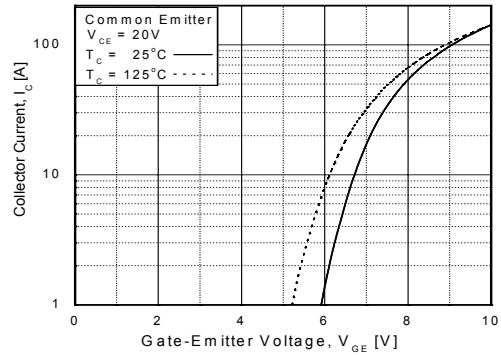

**Figure 5. Saturation Voltage vs. Case Temperature at Variant Current Level**

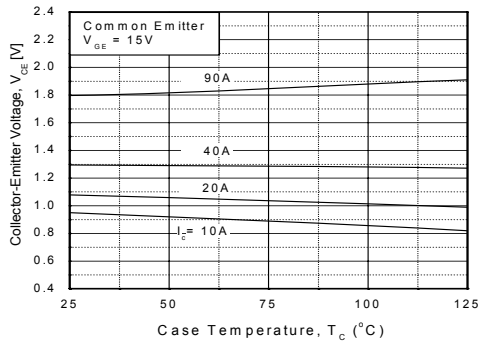


**Figure 6. Saturation Voltage vs. Vge**

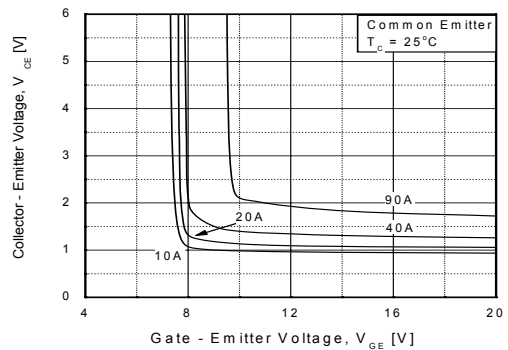


**Typical Performance Characteristics** (Continued)


**Figure 7. Saturation Voltage vs.  $V_{GE}$**

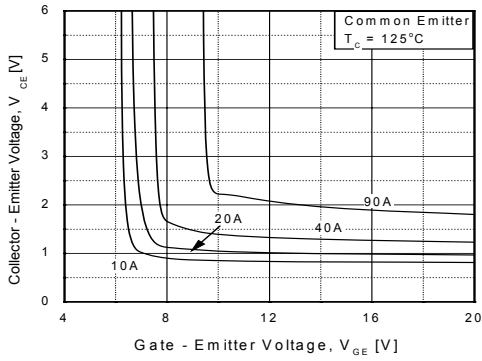


**Figure 8. Capacitance Characteristics**

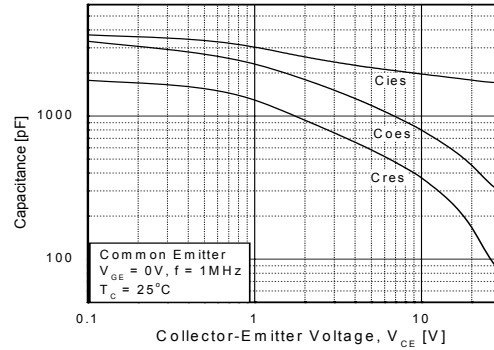


**Figure 9. Gate Charge Characteristics**

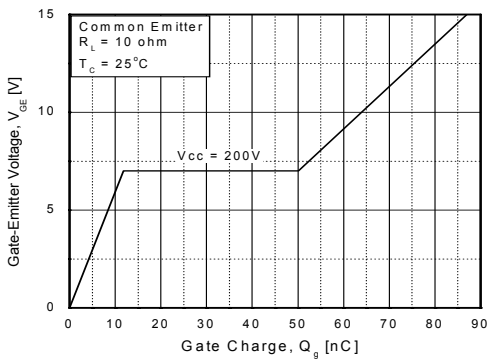


**Figure 10. SOA Characteristics**

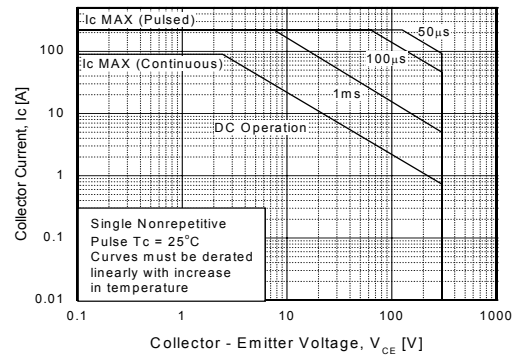

**Figure 11. Turn-On Characteristics vs. Gate Resistance**

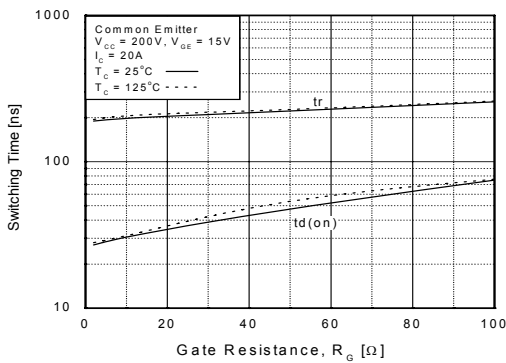


**Figure 12. Turn-Off Characteristics vs. Gate Resistance**

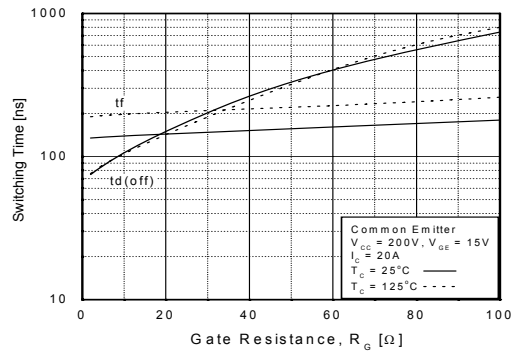


**Typical Performance Characteristics** (Continued)


**Figure 13. Turn-On Characteristics vs. Collector Current**

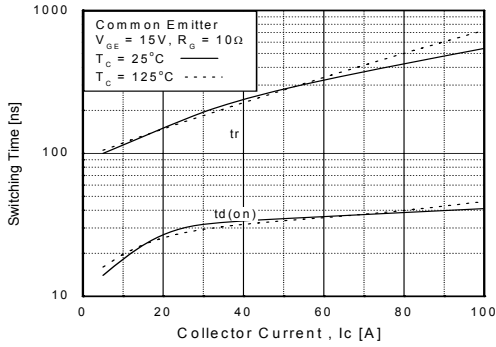


**Figure 14. Turn-Off Characteristics vs. Collector Current**

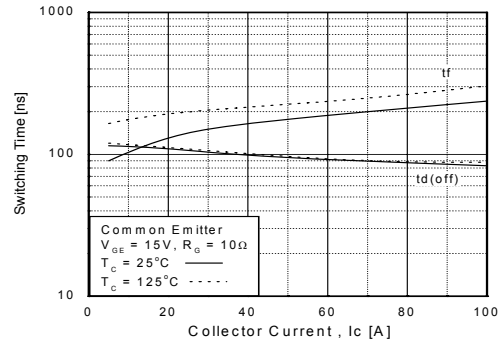


**Figure 15. Switching Loss vs. Gate Resistance**

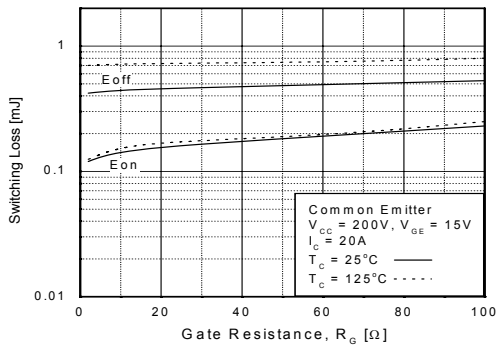

**Figure 16. Switching Loss vs. Collector Current**

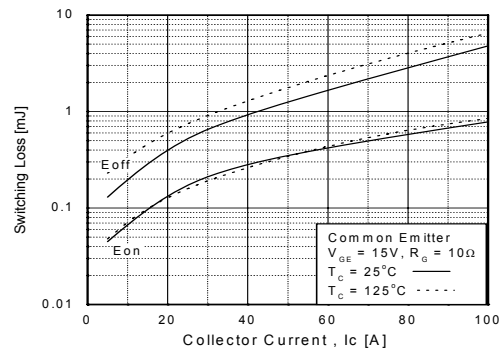


**Figure 17. Turn-Off SOA Figure**

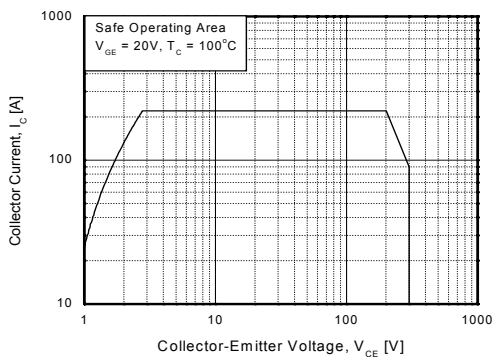


Typical Performance Characteristics (Continued)

Figure 18. Transient Thermal Impedance of IGBT

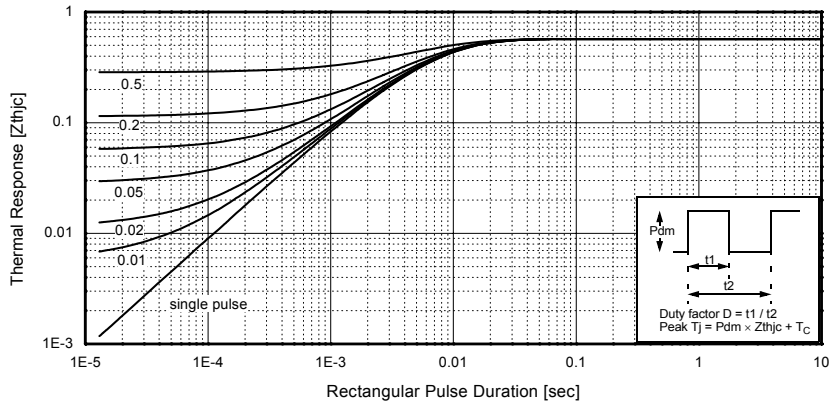

Mechanical Dimensions

TO-3P

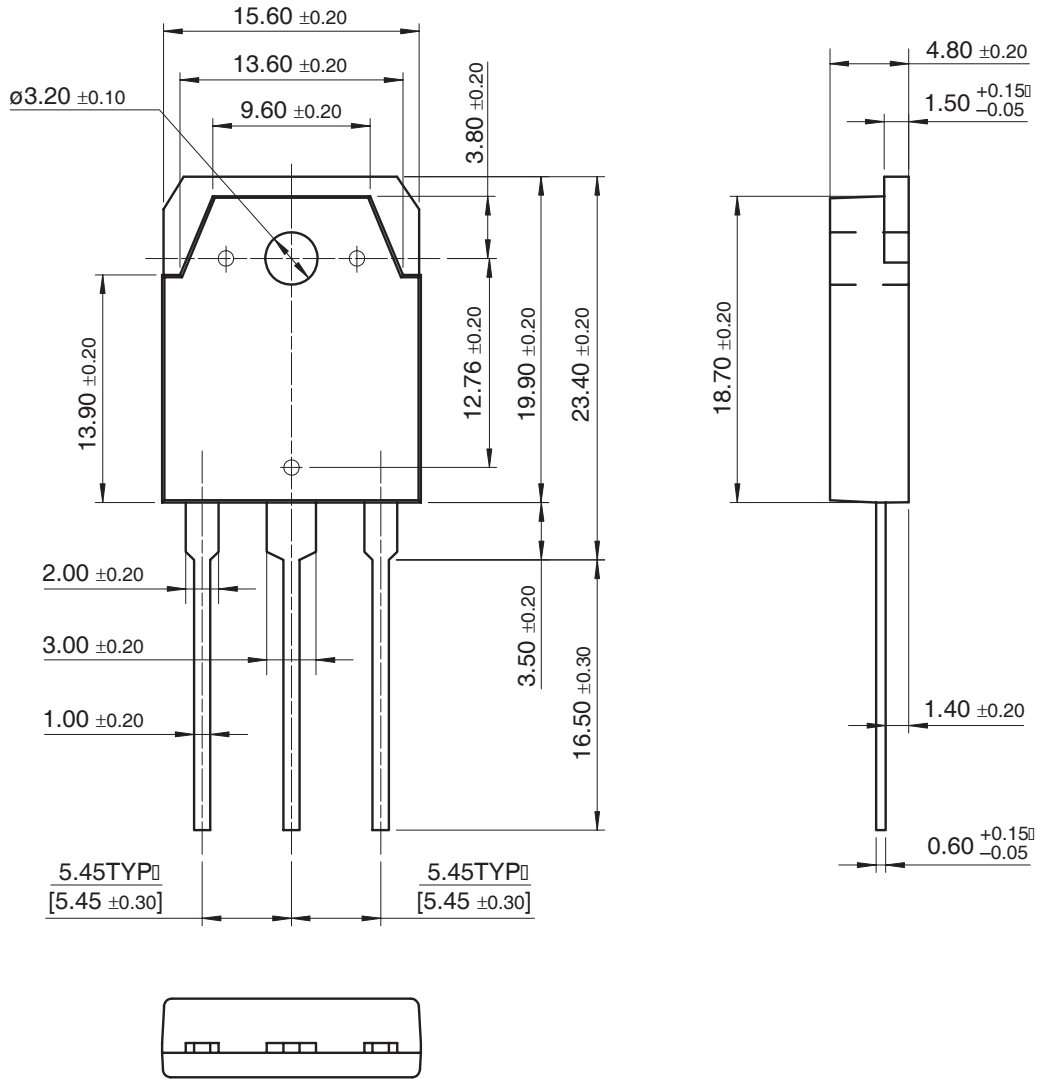

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FACT Quiet Series™	OCX™	SILENT SWITCHER®	UniFET™
ActiveArray™	GlobalOptoisolator™	OCXPro™	SMART START™	UltraFET®
Bottomless™	GTO™	OPTOLOGIC®	SPM™	VCX™
Build it Now™	HiSeC™	OPTOPLANAR™	Stealth™	Wire™
CoolFET™	I <sup>2</sup> C™	PACMAN™	SuperFET™	
CROSSVOLT™	i-Lo™	POP™	SuperSOT™-3	
DOME™	ImpliedDisconnect™	Power247™	SuperSOT™-6	
EcoSPARK™	IntelliMAX™	PowerEdge™	SuperSOT™-8	
E <sup>2</sup> CMOS™	ISOPLANAR™	PowerSaver™	SyncFET™	
EnSigna™	LittleFET™	PowerTrench®	TCM™	
FACT™	MICROCOUPLER™	QFET®	TinyBoost™	
FAST®	MicroFET™	QST™	TinyBuck™	
FAST <sub>r</sub> ™	MicroPak™	QT Optoelectronics™	TinyPWM™	
FPS™	MICROWIRE™	Quiet Series™	TinyPower™	
FRFET™	MSX™	RapidConfigure™	TinyLogic®	
	MSXPro™	RapidConnect™	TINYOPTO™	
Across the board. Around the world.™		µSerDes™	TruTranslation™	
The Power Franchise®		ScalarPump™	UHC™	
Programmable Active Droop™				

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.



Home >> Find products >>

## FGA90N30

300V PDP IGBT

### Contents

- [General description](#)
- [Features](#)
- [Product status/pricing/packageing](#)
- [Order Samples](#)
- [Qualification Support](#)

### General description

Employing Unified IGBT Technology, FGA90N30 provides low conduction and switching loss. FGA90N30 offers the optimum solution for PDP applications where low conduction loss is essential.

[back to top](#)


### Features

- High Current Capability
- Low saturation voltage:  $V_{CE(sat)}$ , Typ = 1.1V@  $I_C = 20A$
- High Input Impedance

[back to top](#)

### Product status/pricing/packageing

**BUY**

Product	Product status	Pb-free Status	Pricing*	Package type	Leads	Packing method	Package Marking Convention**
FGA90N30TU	Full Production	 Full Production	\$3.42	<a href="#">TO-3P</a>	3	RAIL	Line 1: \$Y (Fairchild logo) Line 2: FGA90N30 Line 3: &3

\* Fairchild 1,000 piece Budgetary Pricing

\*\* A sample button will appear if the part is available through Fairchild's on-line samples program. If there is no sample button, please contact a [Fairchild distributor](#) to obtain samples

### Related Links

[Request samples](#)

[How to order products](#)

[Product Change Notices \(PCNs\)](#)

[Support](#)

[Sales support](#)

[Quality and reliability](#)

[Design center](#)

**BUY**

### Datasheet

[Download this datasheet](#)



[e-mail this datasheet](#)



### This page

[Print version](#)



Indicates product with Pb-free second-level interconnect. For more information [click here](#).

Package marking information for product FGA90N30 is available. [Click here for more information](#).

[back to top](#)

### Qualification Support

Click on a product for detailed qualification data

Product
<a href="#">FGA90N30TU</a>

[back to top](#)

© 2007 Fairchild Semiconductor

