
								ŀ	REVISI	ONS										
LTR						DESCF	RIPTIO	N					DATE (YR-MO-DA)			APPROVED				
А	Cha	nges in	accorda	ance wi	th NOF	R 5962-	·R118-9	92.					92-02-04			M. A. Frye				
В	Cha	nges in a	accorda	ance wi	th NOF	R 5962-	·R198-9)3						93-0	7-13		M. A. Frye			
С		Incorporate revisions A and B N.O.R.'s. Update drawing to deficit changes throughout drw					ng to cu	rrent re	quirem	ents.		01-0)8-15		F	Raymond Monnin		nin		
D	Corr	rected ge	eneric r	number	paragr	aph 1.2	2.1drv	V		02-10-04				Raymond Monnin			nin			
THE ORIGINA	AL FIRST	T PAGE	OF TH	HIS DR	AWING	3 HAS	BEEN I	REPLA	.CED											
THE ORIGINAL	AL FIRST	T PAGE	OF TH	HIS DR	AWING	G HAS	BEEN I	REPLA	.CED											1
	AL FIRST	T PAGE	OF TH	HIS DR	AWING	G HAS	BEEN I	REPLA	CED											
REV	AL FIRST	T PAGE	OF TH	HIS DR	AWING	G HAS	BEEN I	REPLA	CED											
REV SHEET	AL FIRST	T PAGE	OF TH	HIS DR	AWING	G HAS	BEEN I	REPLA	CED											
REV SHEET REV		T PAGE	OF TH	HIS DR		G HAS	BEEN I	REPLA	CED	D	D	D	D	D	D	D	D	D		
REV SHEET REV SHEET		T PAGE	OF TH		/	S HAS				D 4	D 5	D 6	D 7	D 8	D 9	D 10	D 11	D 12		
REV SHEET REV SHEET REV STATUS		T PAGE	OF TH	REV SHE	/ EET	DBY	D	D 2	D		5	6	7	8	9	10	11	<u> </u>	US	
REV SHEET REV SHEET REV STATUS OF SHEETS PMIC N/A	ANDAI	RD	OF TH	REV SHE PRE	/ EET	D BY Larry T	D 1	D 2	D		5	6	7 SE S COL	8 UPPL UMBI	9 .Y CE US, O	10	11 COL 43216	12 .UMB	US	
REV SHEET REV SHEET REV STATUS OF SHEETS PMIC N/A STA MICRO DRA THIS DRAWI FOR L DEPA AND AGE	ANDAI OCIRO AWIN ING IS A USE BY ARTMEN	RD CUIT IG AVAILAR ALL NTS OF THE	BLE	REV SHE PRE	CKED	D BY Larry T Ray N D BY Michae	D 1	D 2	D	MIC LOV	D D CROC W PC FERE	EFEN CIRCU DWEF	7 SE S COL http	UPPL UMBI o://ww	9 Y CE US, O vw.ds AL, E	NTER HIO A SCC. dl	COL 43216 a.mil	.UMB	ANCE	
REV SHEET REV SHEET REV STATUS OF SHEETS PMIC N/A STA MICRO DRA THIS DRAWI FOR L DEPA AND AGEI DEPARTMEN	ANDAI OCIRO AWIN ING IS A USE BY ARTMEN INCIES INT OF	RD CUIT IG AVAILAI (ALL NTS OF THE DEFEN	BLE	REV SHE PRE	CKED ROVEI	D BY Larry T Ray M D BY Michae APPRO 88-1	D 1 . Gaude	D 2	D	MIC LOV DIF SIL	D CROC W PC FERI	EFEN CIRCU DWEF ENTIA	7 SE S COL http	BUPPL UMBI D://ww DIGIT HOTT NE R	9 Y CE US, O vw.ds AL, E	NTER HIO A SCC. dl	COL 43216 a.mil	12 LUMB	ANCE	
REV SHEET REV SHEET REV STATUS OF SHEETS PMIC N/A STA MICRO DRA THIS DRAWI FOR L DEPA AND AGEI DEPARTMEN	ANDAI OCIRO AWIN ING IS A USE BY ARTMEN	RD CUIT IG AVAILAI (ALL NTS OF THE DEFEN	BLE	REV SHE PRE	CKED ROVEI	D BY Larry T BY Ray M D BY Michae APPRO 88-1	D 1 . Gaude	D 2	D	MIC LOV DIF SIL	D D CROC W PC FERE	EFEN CIRCL DWEF ENTIA	7 SE S COL http	BUPPLUMBIO://ww	9 Y CE US, O vw.ds AL, E	NTER HIO SCC.dl	AR, MOI	12 LUMB	ANCE	

1. SCOPE

- 1.1 <u>Scope</u>. This drawing describes device requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A.
 - 1.2 Part or Identifying Number (PIN). The complete PIN is as shown in the following example:



1.2.1 <u>Device type</u>. The device type identify the circuit function as follows:

Device type Generic number Circuit function

01 55ALS195 Quadruple differential line receiver with three-state outputs

1.2.2 <u>Case outlines</u>. The case outlines are as designated in MIL-STD-1835 and as follows:

Outline letter	Descriptive designator	<u>Terminals</u>	Package style
Е	GDIP1-T16 or CDIP2-T16	16	dual-in-line
F	GDFP2-F16 or CDFP3-F16	16	flat pack
2	CQCC1-N20	20	square leadless chip carrier

- 1.2.3 Lead finish. The lead finish is as specified in MIL-PRF-38535, appendix A.
- 1.3 Absolute maximum ratings.

Supply voltage range	
Input voltage, A or B inputs	
Differential input voltage 1/	-15 V dc to +15 V dc
Enable input voltage	-1.5 V dc to +7.0 V dc
Low level output current	50 mA
Maximum power dissipation (P _D) <u>2</u> /	192.5 mW
Storage temperature range	-60°C to +150°C
Lead temperature (soldering, 60 seconds)	+260°C
Thermal resistance, junction-to-case (θ _{JC})	See MIL-STD-1835
Junction temperature (T _J)	+150°C

1.4 Recommended operating conditions.

Supply voltage range (V _{CC})	4.5 V dc minimum to 5.5 V dc maximum
Common mode input voltage (V _{CM})	±7.0 V dc maximum
Differential input voltage (V _{ID})	±12.0 V dc
High level input voltage (V _{IH})	2.0 V dc minimum
Low level input voltage (V _{IL})	0.8 V dc
Maximum high level output current (I _{OH})	-0.4 mA
Maximum low level output current (I _{OL})	16 mA
Case operating temperature range (T _C)	-55°C to +125°C

- 1/ Differential input voltage is measured at the noninverting input with respect to the corresponding inverting input.
- 2/ Maximum power dissipation is defined as V_{CC} x I_{CC}, and must withstand the added P_D due to short circuit test, e.g., I_{OS}.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88649
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000		REVISION LEVEL D	SHEET 2

2. APPLICABLE DOCUMENTS

2.1 <u>Government specification, standards, and handbooks</u>. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-883 - Test Method Standard Microcircuits.

MIL-STD-1835 - Interface Standard Electronic Component Case Outlines.

HANDBOOKS

DEPARTMENT OF DEFENSE

MIL-HDBK-103 - List of Standard Microcircuit Drawings.

MIL-HDBK-780 - Standard Microcircuit Drawings.

(Unless otherwise indicated, copies of the specification, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 <u>Order of precedence</u>. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

- 3.1 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein. Product built to this drawing that is produced by a Qualified Manufacturer Listing (QML) certified and qualified manufacturer or a manufacturer who has been granted transitional certification to MIL-PRF-38535 may be processed as QML product in accordance with the manufacturers approved program plan and qualifying activity approval in accordance with MIL-PRF-38535. This QML flow as documented in the Quality Management (QM) plan may make modifications to the requirements herein. These modifications shall not affect form, fit, or function of the device. These modifications shall not affect the PIN as described herein. A "Q" or "QML" certification mark in accordance with MIL-PRF-38535 is required to identify when the QML flow option is used.
- 3.2 <u>Design, construction, and physical dimensions</u>. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535, appendix A and herein.
 - 3.2.1 Case outlines. The case outlines shall be in accordance with 1.2.2 herein.
 - 3.2.2 <u>Terminal connections</u>. The terminal connections shall be as specified on figure 1.
 - 3.2.3 Truth table. The truth table shall be as specified on figure 2.
 - 3.2.4 Logic diagrams. The logic diagrams shall be as specified on figure 3.
 - 3.2.5 Test circuit and switching waveforms. Test circuit and switching waveforms shall be as specified on figure 4.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88649
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000		REVISION LEVEL D	SHEET 3

- 3.3 <u>Electrical performance characteristics</u>. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full case operating temperature range.
- 3.4 <u>Electrical test requirements</u>. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.
- 3.5 <u>Marking</u>. Marking shall be in accordance with MIL-PRF-38535, appendix A. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked as listed in MIL-HDBK-103 (see 6.6 herein). For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device.
- 3.5.1 <u>Certification/compliance mark</u>. A compliance indicator "C" shall be marked on all non-JAN devices built in compliance to MIL-PRF-38535, appendix A. The compliance indicator "C" shall be replaced with a "Q" or "QML" certification mark in accordance with MIL-PRF-38535 to identify when the QML flow option is used.
- 3.6 <u>Certificate of compliance</u>. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6 herein). The certificate of compliance submitted to DSCC-VA prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-PRF-38535, appendix A and the requirements herein.
- 3.7 <u>Certificate of conformance</u>. A certificate of conformance as required in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.
- 3.8 Notification of change. Notification of change to DSCC-VA shall be required in accordance with MIL-PRF-38535, appendix A.
- 3.9 <u>Verification and review</u>. DSCC, DSCC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.
 - 4. QUALITY ASSURANCE PROVISIONS
- 4.1 <u>Sampling and inspection</u>. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.
- 4.2 <u>Screening</u>. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:
 - a. Burn-in test, method 1015 of MIL-STD-883.
 - (1) Test condition B or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.
 - (2) $T_A = +125^{\circ}C$, minimum.
 - b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88649
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000		REVISION LEVEL D	SHEET 4

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions $-55^{\circ}\text{C} \le \text{T}_{\text{C}} \le +125^{\circ}\text{C}$ $4.5 \text{ V} \le \text{V}_{\text{CC}} \le 5.5 \text{ V}$		Group A subgroups			nits	Unit	
		unless otherw	ise specified			Min	Max		
Positive-going threshold voltage	V _T +			1, 2, 3	All		200	mV	
Negative-going threshold voltage	V _T -			1, 2, 3	All	-200		mV	
Enable input clamp voltage	V _{IC}	$V_{CC} = 4.5 \text{ V}, I_{IN} =$	18 mA	1, 2, 3	All		-1.5	V	
High level output voltage	V _{OH}	$V_{CC} = 4.5 \text{ V}, V_{ID}$ $I_{OH} = -0.4 \text{ mA } V_{IL}$	•	1, 2, 3	All	2.5		V	
Low level output voltage	V _{OL}	$V_{ID} = -200 \text{ mV},$ $V_{IH} = 2.0 \text{ V},$	I _{OL} = 8 mA	1, 2, 3	All		0.45	V	
		$V_{IL} = 0.8 \text{ V},$ $V_{CC} = 4.5 \text{ V}$	I _{OL} = 16 mA				0.50		
High impedance state output current	I _{OZ}	V _{CC} = 5.5 V, V _{IL} = 0.8 V	$V_{ID} = -3.0 \text{ V},$ $V_{OUT} = 2.7 \text{ V}$	1, 2, 3	All		20	μА	
			$V_{ID} = 3.0 \text{ V},$ $V_{OUT} = 0.5 \text{ V}$				-20		
Line input current	II	Other input	$V_{CC} = 4.5 \text{ V},$ $V_{IN} = 15 \text{ V}$	1, 2, 3	All		1.2	mA	
		at 0.0 V	$V_{CC} = 5.5 \text{ V},$ $V_{IN} = -15 \text{ V}$				-1.7		
High level enable input current	lιΗ	V _{CC} = 5.5 V	V _{IH} = 2.7 V	1, 2, 3	All		20	μΑ	
		VCC = 3.3 V	V _{IH} = 5.5 V				100		
Low level enable input current	I _{IL}	$V_{CC} = 5.5 \text{ V}, V_{IL}$	= 0.4 V	1, 2, 3	All		-100	μА	
Input resistance	R _I	V _{CC} = 5.5 V		1, 2, 3	All	12		kΩ	
Short circuit output current	los	$V_{CC} = 5.5 \text{ V}, V_{OU}$ $V_{ID} = 3.0 \text{ V},$		1, 2, 3	All	-15	-130	mA	
Supply current	Icc	$V_{CC} = 5.5 \text{ V, out}$	puts disabled	1, 2, 3	All		35	mA	
Functional tests		See 4.3.1c		7, 8	All				

See footnotes at end of table.

STANDARD
MICROCIRCUIT DRAWING
EEENICE CLIDDLY CENTED COLLIMD

DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000

SIZE A		5962-88649
	REVISION LEVEL D	SHEET 5

TABLE I. <u>Electrical performance characteristics</u> - continued.

Test	Symbol	Conditions $-55^{\circ}C \le T_C \le +125^{\circ}C$ unless otherwise specified	Group A subgroups	Device type	Lir	mits	Unit
					Min	Max	
Propagation delay time,	t _{PLH}	V _{CC} = 4.5 V to 5.5 V,	9	All		25	ns
A, B to Y		$V_{ID} = -1.5 \text{ V to } 1.5 \text{ V},$ $V_{ID} = -1.5 \text{ V to } 1.5 \text{ V},$	10, 11	All		35	ns
	t _{PHL}	$C_L = 15 \text{ pF}$, See figure 4 $\underline{2}$ /	9	All		23	ns
		_	10, 11	All		34	ns
Output enable time,	t _{PZH}		9	All		28	ns
A, B to Y			10, 11	All		40	ns
	t _{PZL}		9	All		27	ns
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V},$ $C_{L} = 15 \text{ pF}, \text{ See figure } 4$	10, 11	All		40	ns
Output disable time,	t _{PHZ}	2/	9	All		30	ns
A, B to Y			10, 11	All		40	ns
	t _{PLZ}		9	All		24	ns
			10, 11	All		35	ns

^{1/} Not more than one output should be shorted at one time, and the duration of the short circuit condition shall not exceed one second.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBI

DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000

SIZE A		5962-88649
	REVISION LEVEL D	SHEET 6

 $[\]underline{2}$ / Vendor may test with V_{CC} = 5.0 V but must guarantee the 4.5 V to 5.5 V limits.

Device type	01	l
Case outlines	E and F	2
Terminal number	Terminal	symbol
1	1B	NC
2	1A	1B
3	1Y	1A
4	1, 2EN	1Y
5	2Y	1, 2EN
6	2A	NC
7	2B	2Y
8	GND	2A
9	3B	2B
10	3A	GND
11	3Y	NC
12	3, 4EN	3B
13	4Y	3A
14	4A	3Y
15	4B	3, 4EN
16	V_{CC}	NC
17		4Y
18		4A
19		4B
20		V _{CC}

NC = No internal connection

FIGURE 1. <u>Terminal connections</u>.

Differential input	Enables	Output
A - B	EN	Y
V _{ID} ≥ 0.2 V	Н	Н
-0.2 V < V _{ID} < 0.2 V	Н	1
V _{ID} ≤ -0.2 V	Н	L
X	L	Z

H = High level voltage L = Low level voltage


X = Irrelevant

I = Indeterminate

Z = High impedance (off)

FIGURE 2. Truth table.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88649
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000		REVISION LEVEL D	SHEET 7




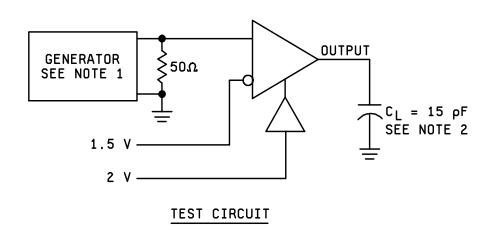


FIGURE 3. Logic diagram.

STANDARD MICROCIRCUIT DRAWING

DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000

SIZE A		5962-88649
	REVISION LEVEL D	SHEET 8






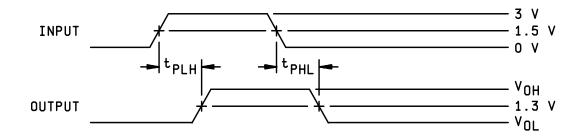


FIGURE 4. Test circuit and switching waveforms.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88649
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000		REVISION LEVEL D	SHEET 9

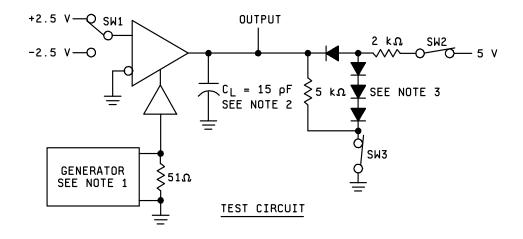

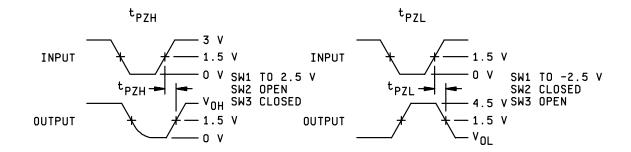

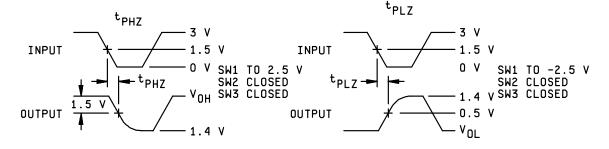

NOTES:

- 1. The input pulse is supplied by a generator having the following characteristics: $t_r \le 6$ ns, $t_f \le 6$ ns, $PRR \le 1$ MHz, duty cycle $\le 50\%$, $Z_{OUT} = 50\Omega$.
- 2. C_L includes probe and stray capacitance.
- 3. All diodes are 1N3064 or equivalent.

FIGURE 4. Test circuit and switching waveforms - continued.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88649
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000		REVISION LEVEL D	SHEET 10

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (in accordance with MIL-STD-883, method 5005, table I)
Interim electrical parameters (method 5004)	
Final electrical test parameters (method 5004)	1*, 2, 3, 7, 8, 9
Group A test requirements (method 5005)	1, 2, 3, 7, 8, 9, 10**, 11**
Groups C and D end-point electrical parameters (method 5005)	1, 2, 3

- * PDA applies to subgroup 1.
- ** Subgroups 10 and 11, if not tested, shall be guaranteed to the limits specified in table I.
- 4.3 <u>Quality conformance inspection</u>. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.
 - 4.3.1 Group A inspection.
 - a. Tests shall be as specified in table II herein.
 - b. Subgroups 4, 5, and 6 in table I, method 5005 of MIL-STD-883 shall be omitted.
 - c. Subgroups 7 and 8 shall include verification of the truth table as specified on figure 2 herein.
 - 4.3.2 Groups C and D inspections.
 - a. End-point electrical parameters shall be as specified in table II herein.
 - b. Steady-state life test conditions, method 1005 of MIL-STD-883.
 - (1) Test condition B or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.
 - (2) $T_A = +125^{\circ}C$, minimum.
 - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88649
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000		REVISION LEVEL D	SHEET 11

- 5. PACKAGING
- 5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535, appendix A.
- 6. NOTES
- 6.1 <u>Intended use</u>. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.
- 6.2 <u>Replaceability</u>. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.
- 6.3 <u>Configuration control of SMD's</u>. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished using DD Form 1692, Engineering Change Proposal.
- 6.4 <u>Record of users</u>. Military and industrial users shall inform Defense Supply Center Columbus when a system application requires configuration control and the applicable SMD. DSCC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DSCC-VA, telephone (614) 692-0544.
- 6.5 <u>Comments</u>. Comments on this drawing should be directed to DSCC-VA, Columbus, Ohio 43216-5000, or telephone (614) 692-0547.
- 6.6 <u>Approved sources of supply</u>. Approved sources of supply are listed in MIL-HDBK-103. The vendors listed in MIL-HDBK-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DSCC-VA.

STANDARD		
MICROCIRCUIT DRAWING		

DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000

SIZE A		5962-88649
	REVISION LEVEL D	SHEET 12

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 02-10-04

Approved sources of supply for SMD 5962-88649 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38535 during the next revision. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DSCC-VA. This bulletin is superseded by the next dated revision of MIL-HDBK-103 and QML-38535.

Standard	Vendor	Vendor
microcircuit drawing	CAGE	similar
PIN <u>1</u> /	number	PIN <u>2</u> /
5962-8864901EA	<u>3</u> /	SNJ55ALS195J
5962-8864901FA	<u>3</u> /	SNJ55ALS195W
5962-88649012A	<u>3</u> /	SNJ55ALS195FK

- 1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.
- <u>2</u>/ <u>Caution</u>. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.
- 3/ No approved source.

Vendor CAGE number

Vendor name and address

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.