




## SOT-23 Plastic-Encapsulate Diodes


### BAT54/A/C/S SCHOTTKY DIODES

#### FEATURES


- Extremely Fast Switching Speed




BAT54



BAT54A



BAT54C



BAT54S

#### Maximum Ratings @ $T_A=25^\circ\text{C}$

Parameter	Symbol	Limits			Unit
Peak Repetitive Peak reverse voltage	$V_{RRM}$				
Working Peak Reverse Voltage	$V_{RWM}$		30		V
DC Blocking Voltage	$V_R$				
Forward Continuous Current	$I_{FM}$		200		mA
Power Dissipation	$P_D$		200		mW
Storage temperature	$T_{STG}$	-55-150			°C

#### Electrical Characteristics @ $T_A=25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Reverse Breakdown Voltage	$V_{(BR)R}$	30			V	$I_R=100\mu\text{A}$
Forward voltage	$V_{F1}$			0.24	V	$I_F=0.1\text{mA}$
	$V_{F2}$			0.32	V	$I_F=1\text{mA}$
	$V_{F3}$			0.40	V	$I_F=10\text{mA}$
	$V_{F4}$			0.50	V	$I_F=30\text{mA}$
	$V_{F5}$			1	V	$I_F=100\text{mA}$
Reverse current	$I_R$			2	$\mu\text{A}$	$V_R=25\text{V}$
Diode Capacitance	$C_D$			10	pF	$V_R=1\text{V}, f=1\text{MHz}$
Reverse Recovery Time	$t_{rr}$			5	nS	$I_F=I_R=10\text{mA}$ $I_{rr}=0.1 \times I_R, R_L=100\Omega$



## Typical Characteristics

BAT54/A/C/S

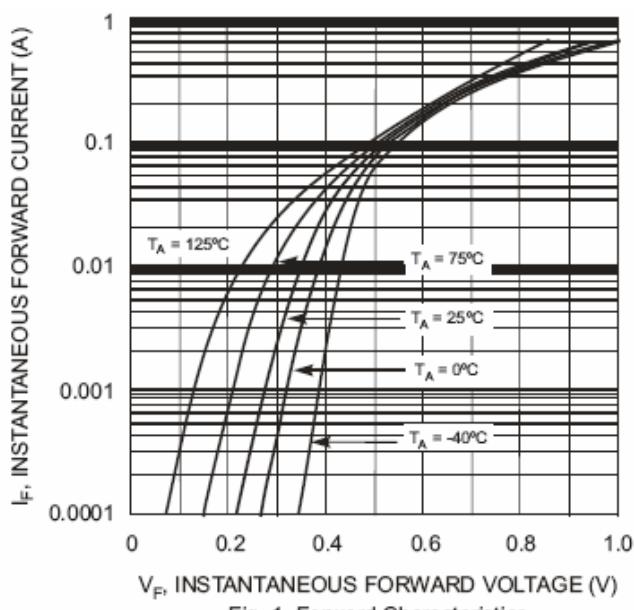


Fig. 1 Forward Characteristics

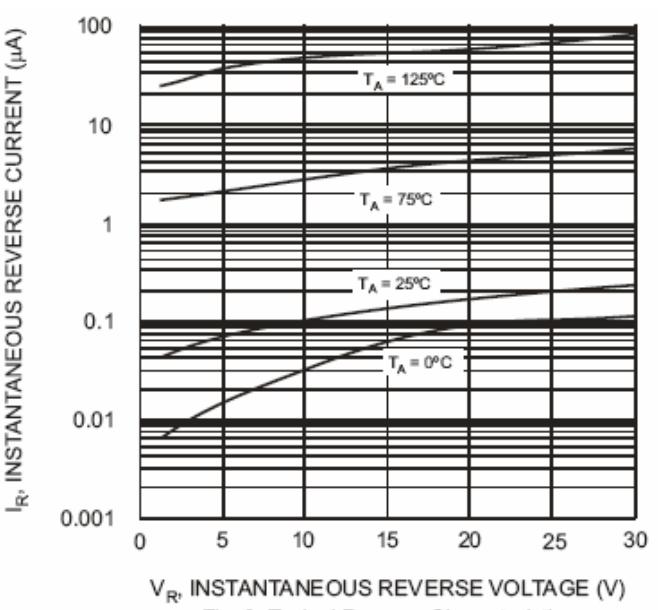


Fig. 2 Typical Reverse Characteristics

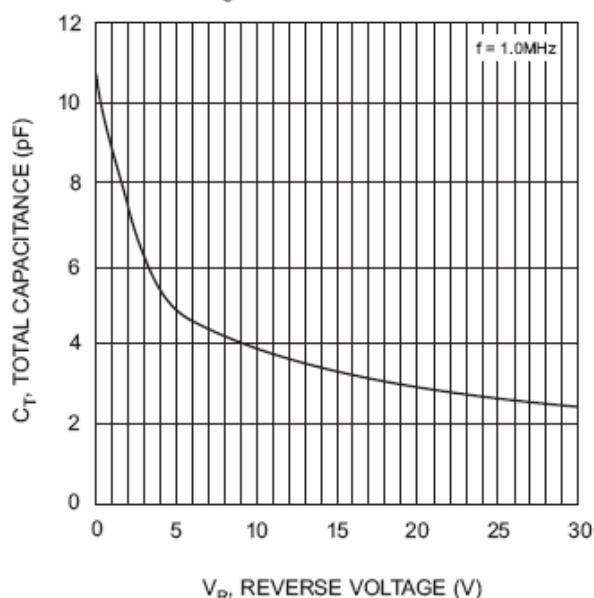


Fig. 3 Typical Capacitance vs. Reverse Voltage

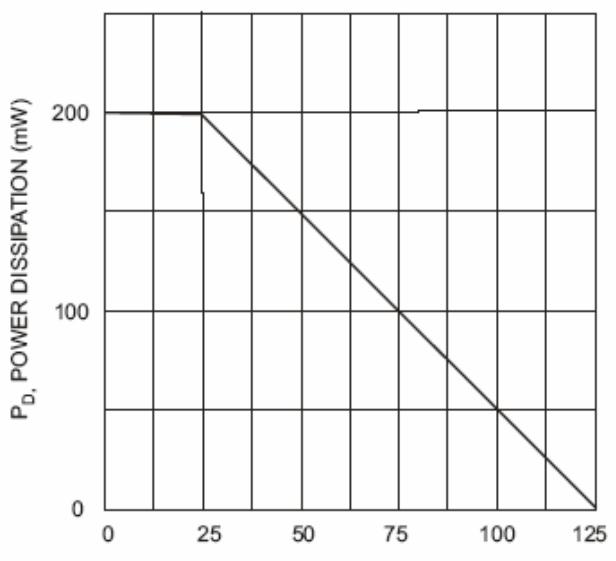


Fig. 4 Power Derating Curve