

Precision Monolithics Inc.

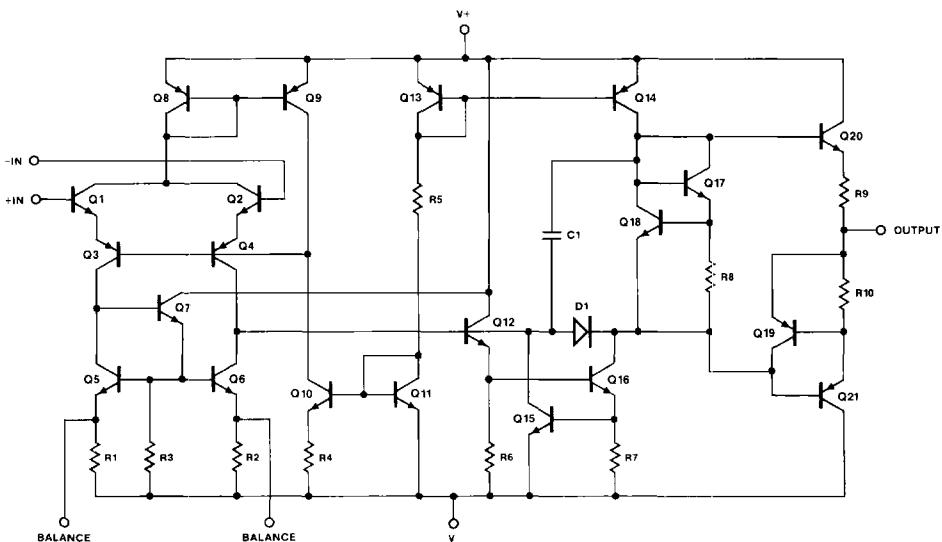
FEATURES

- Industry Standard 741 Specifications
- Internal Frequency Compensation
- Continuous Short-Circuit Protection
- Silicon-Nitride Passivation
- Low Noise

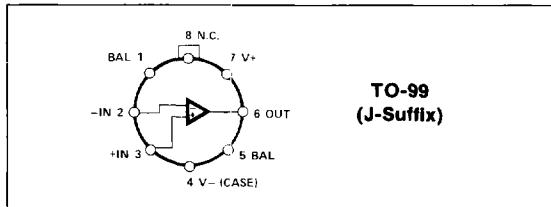
ORDERING INFORMATION [†]

$T_A = +25^\circ\text{C}$	PACKAGE	OPERATING TEMPERATURE RANGE
	TO-99	
6.0	PM741CJ	COM
† Burn-in is available on commercial and industrial temperature range parts in CerDIP, plastic DIP, and TO-can packages. For ordering information, see PMI's Data Book, Section 2.		
Also available with JAN 38510 processing. Refer to 10101 slash sheet for electrical/process parameters.		
MIL-M-38510-10101BGA	PM741AJ5	
MIL-M-38510-10101BGC	PM741AJ1	
MIL-M-38510-10101SGA	PM741"S"AJ5*	

* Undergoing Part I qualification. Consult PMI for availability.

SIMPLIFIED SCHEMATIC**GENERAL DESCRIPTION**

The PM-741 series of internally-compensated operational amplifiers provide industry-standard 741 specifications. In addition, Precision Monolithics' exclusive Silicon-Nitride "Triple Passivation" process provides high reliability and long-term stability of parameters. For higher performance general purpose op amps, refer to the OP-02 data sheet. See the OP-04/OP-14 data sheet for duals.

PIN CONNECTIONS

ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage	$\pm 18V$
Differential Input Voltage	$\pm 30V$
Input Voltage	Supply Voltage
Output Short-Circuit Duration	Indefinite

Storage Temperature Range -65°C to $+150^{\circ}\text{C}$
 Lead Temperature Range (Soldering, 60 sec) $+300^{\circ}\text{C}$
 Operating Temperature Range 0°C to $+70^{\circ}\text{C}$

PACKAGE TYPE	Θ_{JA} (Note 1)	Θ_{JC}	UNITS
TO-99 (J)	150	18	$^{\circ}\text{C}/\text{W}$

NOTES:

1. Θ_{JA} is specified for worst case mounting conditions, i.e., Θ_{JA} is specified for device in socket for TO package.

ELECTRICAL CHARACTERISTICS at $T_A = 25^{\circ}\text{C}$, $V_S = \pm 15V$, unless otherwise noted.

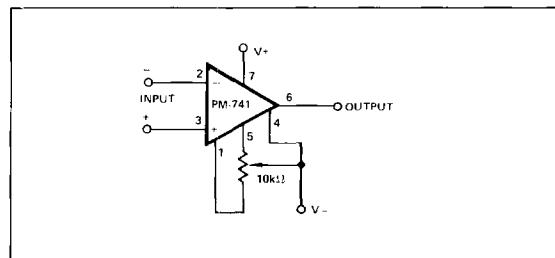
PARAMETER	SYMBOL	CONDITIONS	PM-741			PM-741C			UNITS
			MIN	Typ	MAX	MIN	Typ	MAX	
Input Offset Voltage	V_{OS}	$R_S \leq 10k\Omega$	—	—	5.0	—	—	6.0	mV
Input Offset Current	I_{OS}		—	—	200	—	—	200	nA
Input Bias Current	I_B		—	—	500	—	—	500	nA
Input Resistance	R_{IN}	(Note 1)	0.3	—	—	0.3	—	—	M Ω
Large-Signal Voltage Gain	A_{VO}	$R_L \geq 2k\Omega$, $V_O = \pm 10V$	50,000	—	—	25,000	—	—	V/V
Supply Current	I_{SY}	$V_{OUT} = 0$	—	—	2.8	—	—	2.8	mA

ELECTRICAL CHARACTERISTICS at $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for PM741, $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$ for PM741C, $V_S = \pm 15V$, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	PM-741			PM-741C			UNITS
			MIN	Typ	MAX	MIN	Typ	MAX	
Input Offset Voltage	V_{OS}	$R_S \leq 10k\Omega$	—	—	6.0	—	—	7.5	mV
Input Offset Current	I_{OS}		—	—	500	—	—	300	nA
Input Bias Current	I_B		—	—	1.5	—	—	0.8	μA
Large-Signal Voltage Gain	A_{VO}	$R_L \geq 2k\Omega$, $V_O = \pm 10V$	25,000	—	—	15,000	—	—	V/V
Output Voltage Swing	V_O	$R_L \geq 10k\Omega$ $R_L \geq 1k\Omega$	± 12 ± 10	—	—	± 12 ± 10	—	—	V
Input Voltage Range	IVR		± 12	—	—	± 12	—	—	V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 10V$	70	—	—	70	—	—	dB
Power Supply Rejection Ratio	PSRR	$R_S \leq 10k\Omega$	—	—	142	—	—	142	$\mu\text{V/V}$

NOTE:

1. Guaranteed by design.

TYPICAL OFFSET NULLING CIRCUIT**TYPICAL BURN-IN CIRCUIT**