


## HAL490X CMOS Ratio-Metric Linear Hall Effect IC

### 1. Synopsis

HAL490X, a linear Hall-effect sensor, is composed of Hall sensor, linear amplifier and Totem-Pole output stage. It features low noise output, which makes it unnecessary to use external filtering. It also can provide increased temperature stability and accuracy. The linear Hall sensor has a wide operating temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , appropriate for commercial, consumer, and industrial environments.

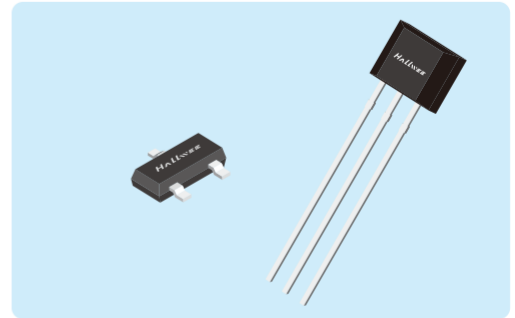

The high sensitivity of Hall-effect sensor accurately tracks extremely weak changes in magnetic flux density. The linear sourcing output voltage is set by the supply voltage and in proportion of vary of the magnetic flux density. Typical operation current is 1.8mA and operating voltage range is 2.8 volts to 6.0 volts. Trim version is available for an ultra low offset products.

The two package styles available provide magnetically optimized solutions for most applications. Package types SO is an SOT-23(1.1 mm nominal height), package UA is a three-lead ultra-mini SIP for through-hole mounting.


### 2. Features and Benefits

- ◆ Operating Voltage Range: 2.8V~6.0V
- ◆ Power consumption of 1.8 mA at 5 VDC for energy efficiency
- ◆ Low-Noise Operation
- ◆ Linear output for circuit design flexibility
- ◆ Totem-Pole for a stable and accurate output
- ◆ Responds to either positive or negative gauss
- ◆ Magnetically Optimized Package for UA, SO
- ◆ Trim version is precise on offset
- ◆ Robust ESD performance
- ◆ RoHS compliant 2011/65/EU and Halogen Free


### 3. Applications

- ◆ Current sensing
- ◆ Motor control
- ◆ Position sensing
- ◆ Magnetic code reading
- ◆ Rotary encoder
- ◆ Ferrous metal detector
- ◆ Vibration sensing
- ◆ Liquid level sensing
- ◆ Weight sensing

### 4. Functional Diagram

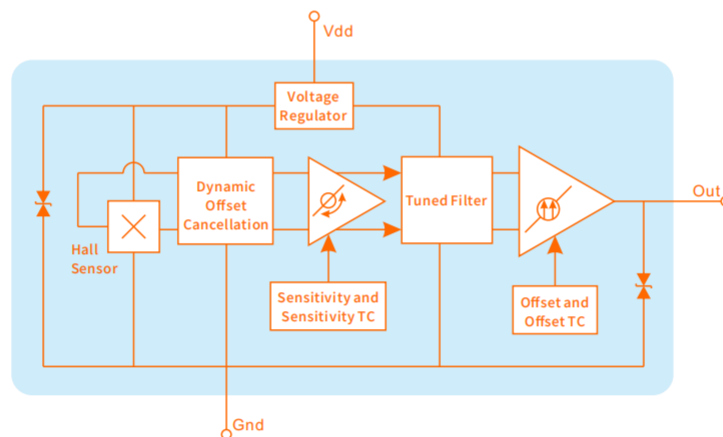

### 5. Pin Definition

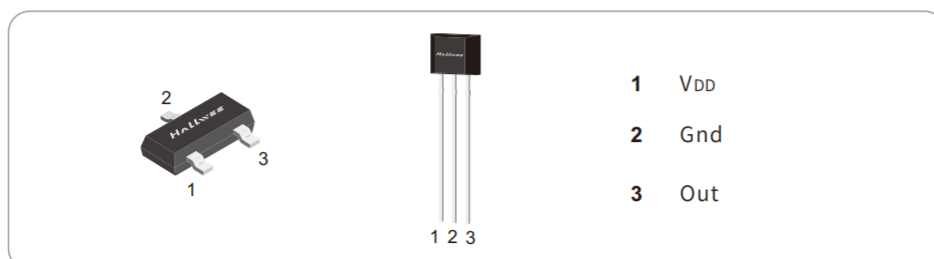

## 6. Absolute Maximum Ratings

TA=+25°C

Characteristics	Symbol	Values	Unit
Supply Voltage	V <sub>DD</sub>	8	V
Reverse Voltage	V <sub>DD</sub>	-0.5	V
Output Voltage	V <sub>out</sub>	8	V
Output current	I <sub>out</sub>	5	mA
Operating Temperature Range	T <sub>A</sub>	-40 ~ 125	°C
Storage temperature Range	T <sub>S</sub>	-65 ~ 150	°C
Maximum Junction Temp	T <sub>J</sub>	150	°C
Thermal Resistance	UA/SO	206/543/543	°C/W
	UA/SO	148/410/410	°C/W
Package Power Dissipation	UA/SO P <sub>D</sub>	606/230/230	mW

Note: Do not apply reverse voltage to VDD and VOUT Pin, It may be caused for Miss function or damaged device.

## 7. Electrical Specifications

DC Operating Parameters: TA=+25°C, VCC=5V


Parameters	Symbol	Test Conditions	Min	Typ	Max	Units
Supply Voltage	V <sub>DD</sub>	Operating	2.5		6.5	V
Supply Current	I <sub>DD</sub>	B=0 Gauss		1.8	3.0	mA
Output Current	I <sub>OUT</sub>	V <sub>DD</sub> > 3V		1.4	2.0	mA
Null Output Voltage	V <sub>null</sub>	B=0 Gauss, (T Type)	2.375	2.5	2.625	V
High Output Voltage	V <sub>OH</sub>	B> Max Magnetic Gauss		4.9	4.99	V
Low Output Voltage	V <sub>OL</sub>	B> Min Magnetic Gauss	0.01	0.1		V
Output Voltage Span	V <sub>OS</sub>			4.8		V
Output Referred Noise	V <sub>ON</sub>	Ta=25°C, output open		20		mV
Power-On Time	T <sub>P</sub>				100	uS
Output Switch Time	T <sub>SW</sub>				150	uS
Output Switch Frequency	F <sub>SW</sub>		3			Khz
Electro-Static Discharge	HBM			4		KV

## 8. Electrical Characteristics


DC Operating Parameters: TA=+25°C, VCC=3.3V

Parameters	Symbol	Test Conditions	Min	Typ	Max	Units
Magnetic Range Gauss	HAL4901			±100		Gs
Magnetic Range Gauss	HAL4902			±220		Gs
Magnetic Range Gauss	HAL4903			±450		Gs
Magnetic Range Gauss	HAL4904			±1000		Gs
Ratiometry Null output error	R <sub>VON</sub>	Operating voltage range relative to 5V		±1.5		%
Ratiometry Sensitivity error	R <sub>SEN</sub>	Operating voltage range relative to 5V		±1.5		%
Linearity	LIN	% of Span		±1.5		%
Sensitivity	HAL4901	VCC=3.3V	13	15	17	mV/G
Sensitivity	HAL4902	VCC=3.3V	6	7.5	8.5	mV/G
Sensitivity	HAL4903	VCC=3.3V	3	3.7	4.3	mV/G
Sensitivity	HAL4904	VCC=3.3V	1.2	1.5	1.8	mV/G
Sensitivity Temperature Coefficient	TC <sub>Sens</sub>	Ta=105°C, relative to Sens@25°C		±0.1		%/°C


## 9. Output Behavior versus Magnetic Polar

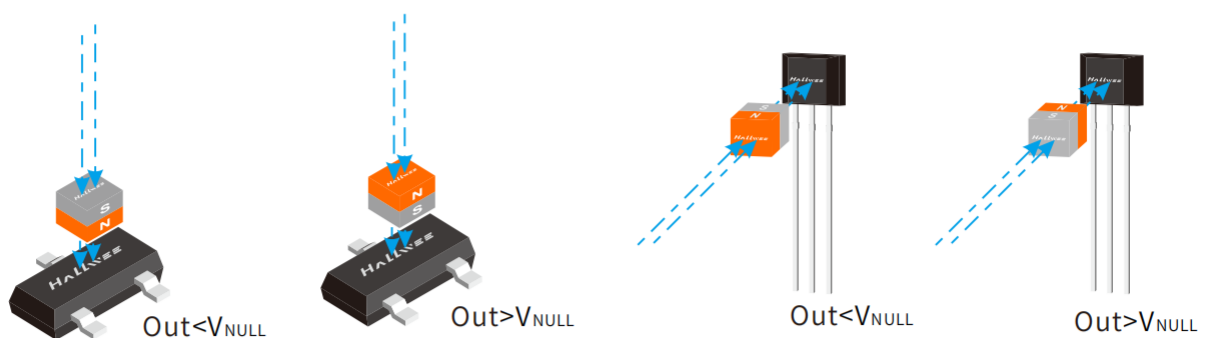

## 10. Magnetoelectric characteristic curve

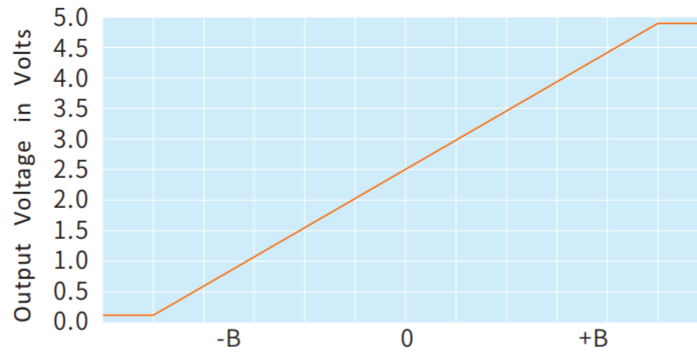

## 11. Typical application circuit

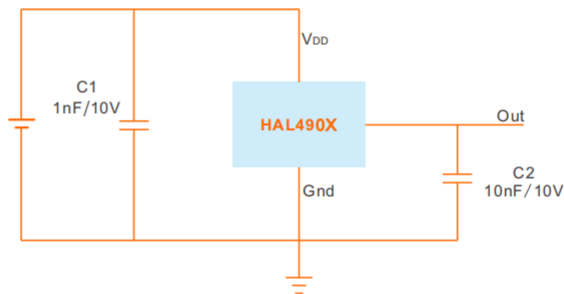


## 12. Order information


Part Number	Package Dimension	MPQ
HAL4901/2/3/4 SO	SO (SOT-23-3L)	3000PCS
HAL4901/2/3/4 UA	UA (TO-92S)	1000PCS

## 12. Package Dimension and Marking

### SOT-23 SO

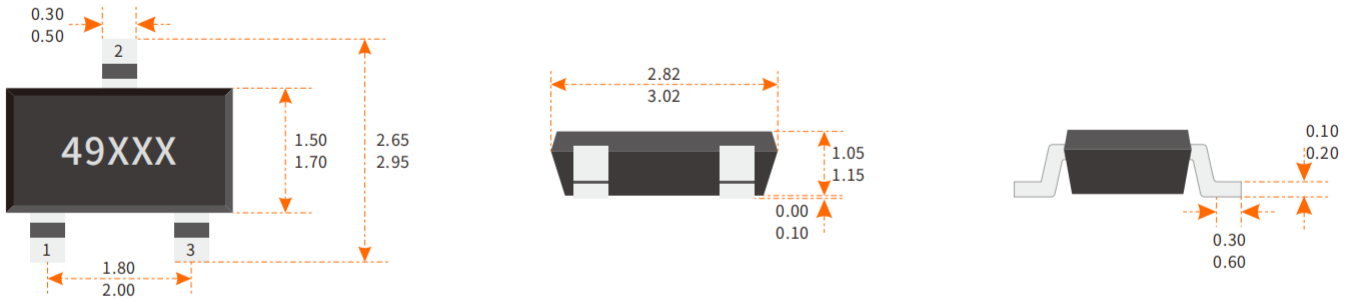

### TO-92S UA

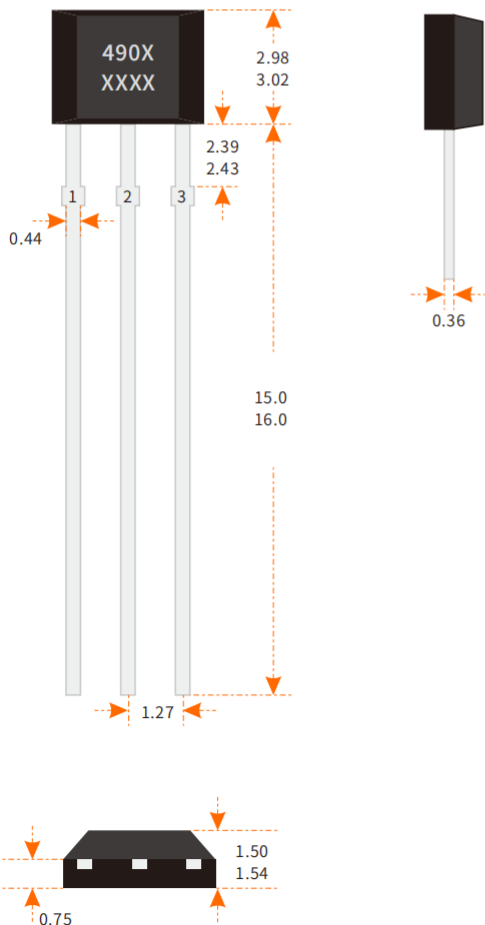

#### NOTES:

1. Controlling dimension: mm
2. Lead thickness after solder plating will be 0.254mm maximum
3. Chip must be in PKG. center.
4. PINOUT (See Top View at left :

Pin 1 V<sub>DD</sub>  
 Pin 2 GND  
 Pin 3 Output

#### Marking:

49X/490X -- Code of Device (HAL490X);  
 XX/XXXX -- Lot Number ;