

## 85V N-Channel Power MOSFET

### Description


MPT035N08, the N-channel Enhanced Power MOSFETs, is obtained by advanced double trench technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. This is suitable device for BMS and high current switching applications.

### General Features


- ①  $V_{DS}=85V$ ,  $R_{ds(on)}<4m\Omega$  @  $V_{GS}=10V$ ,  $I_D=180A$  (Typ:3mΩ)
- ② Fast Switching
- ③ Low On-Resistance ( $R_{DS(on)}\leq 4m\Omega$ )
- ④ Low Gate Charge
- ⑤ Low Reverse transfer capacitances
- ⑥ High avalanche ruggedness
- ⑦ RoHS product

### Application

- ① BMS
- ② Motor drivers



Schematic diagram

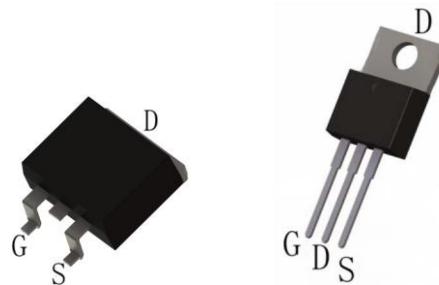

TO-263

TO-220

### Package Marking And Ordering Information:

Ordering Codes	Package	Product Code	Packing
MPT035N08-P	TO-220	035N08	Tube
MPT035N08-S	TO-263	035N08	Tape Reel

### ABSOLUTE RATINGS at $TC=25^{\circ}C$ , unless otherwise specified

Symbol	Parameter	Rating	Units
$V_{DSS}$	Drain-Source Voltage	85	V
$I_D$	Continuous Drain Current, Silicon Limited	185	A
	Continuous Drain Current, Package Limited	120	A
	Continuous Drain Current @ $T_c=100^{\circ}C$ , Silicon Limited	117.2	A
$I_{DM}$ Note1	Pulsed Drain Current	480	A
$V_{GS}$	Gate-Source Voltage	$\pm 20$	V
$E_{AS}$ Note2	Avalanche Energy	240.2	mJ



迈诺斯科技

MPT035N08

PD	Power Dissipation	208.3	W
	Derating Factor above 25°C	1.67	W/°C
T <sub>J</sub> , T <sub>stg</sub>	Operating Junction and Storage Temperature Range	150, -55 to 150	°C
T <sub>L</sub>	Maximum Temperature for Soldering	260	°C

Note1: Repetitive Rating: Pulse width limited by maximum junction temperature Note2:

L=0.5mH, I<sub>as</sub>=35A, Start T<sub>J</sub>=25°C

### Thermal characteristics

Symbol	Parameter	Max	Units
R <sub>θJC</sub>	thermal resistance, Junction-Case	0.5	°C/W
R <sub>θJA</sub>	thermal resistance, Junction-Ambient	62.5	°C/W

### Electrical Characteristics at TC=25°C, unless otherwise specified

OFF Characteristics						
Symbol	Parameter	Test Conditions	Values			Units
			Min	Typ	Max	
V <sub>DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V, I <sub>D</sub> =250μA	85	95	--	V
I <sub>DSS</sub>	Drain-Source Leakage Current	V <sub>DS</sub> =100V, V <sub>GS</sub> =0V	--	--	1	μA
		V <sub>DS</sub> =80V, V <sub>GS</sub> =0V @T <sub>C</sub> =125°C	--	--	100	μA
I <sub>GSS(F)</sub>	Gate-Source Forward Leakage	V <sub>GS</sub> =+20V	--	--	100	nA
I <sub>GSS(R)</sub>	Gate-Source Reverse Leakage	V <sub>GS</sub> =-20V	--	--	-100	nA

ON Characteristics						
Symbol	Parameter	Test Conditions	Values			Units
			Min	Typ	Max	
R <sub>D(on)</sub>	Drain-Source On-Resistance	V <sub>GS</sub> =10V, I <sub>D</sub> =50A	--	3	4	mΩ
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250μA	2.0	3.0	4.0	V

Pulse width tp≤300μs, δ≤2%



迈诺斯科技

MPT035N08

### Dynamic Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min	Typ	Max	
$C_{iss}$	Input Capacitance	$V_{DS}=42.5V$ , $V_{GS}=0$ , $f=1MHz$	--	6234	--	pF
$C_{oss}$	Output Capacitance		--	1181	--	
$C_{rss}$	Reverse Transfer Capacitance		--	97	--	
$Q_g$	Total Gate Charge	$V_{DD}=42.5V$ , $I_D=50A$ , $V_{GS}=10V$	--	124	--	nC
$Q_{gs}$	Gate-Source charge		--	31.2	--	
$Q_{gd}$	Gate-Drain charge		--	39.2	--	





### Switching Characteristics




Symbol	Parameter	Test Conditions	Values			Units
			Min	Typ	Max	
$t_{d(on)}$	Turn-On Delay Time	$V_{DD}=42.5V$ , $I_D=10A$ , $V_{GS}=10V$ , $R_G=3\Omega$ , Resistive Load	--	41	--	ns
$t_r$	Rise Time		--	68	--	
$t_{d(off)}$	Turn-Off Delay Time		--	76	--	
$t_f$	Fall Time		--	44	--	

### Source-Drain Diode Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min	Typ	Max	
$I_S$	Continuous Source Current	$V_{GS}=0V$ , $I_S=50A$	--	--	120	A
$I_{SM}$	Maximum Pulsed Current		--	--	480	A
$V_{SD}$	Diode Forward Voltage	$V_{GS}=0V$ , $I_S=50A$	--	--	1.2	V
$T_{rr}$	Reverse Recovery Time	$I_s=30A$ , $di/dt=100A/\mu s$	--	80	--	ns
$Q_{rr}$	Reverse Recovery Charge		--	112	--	$\mu C$

## Characteristics Curves

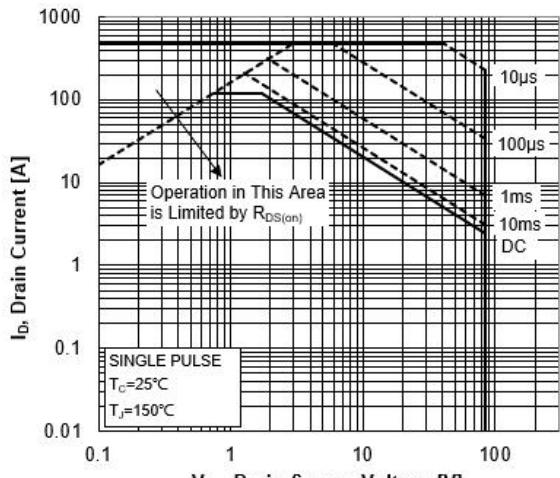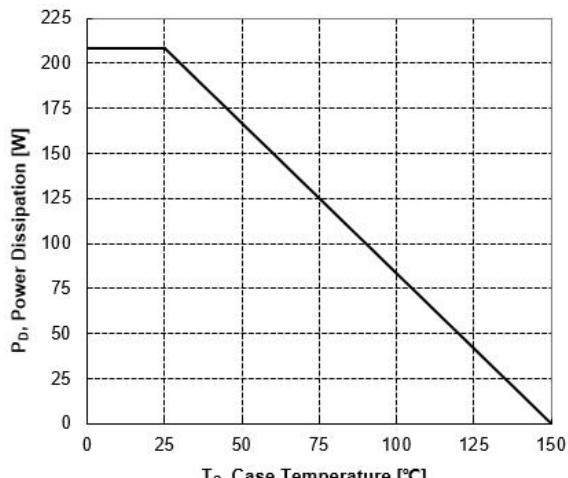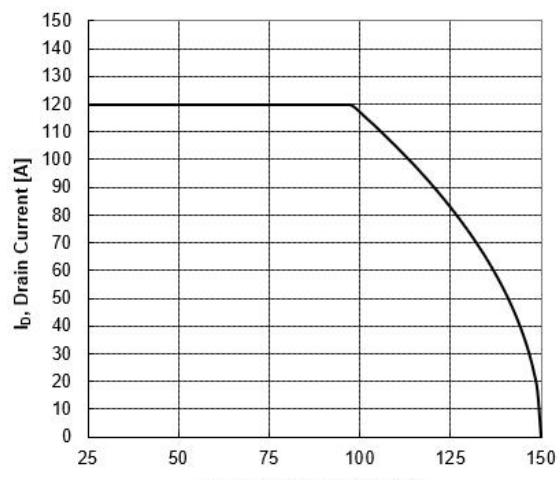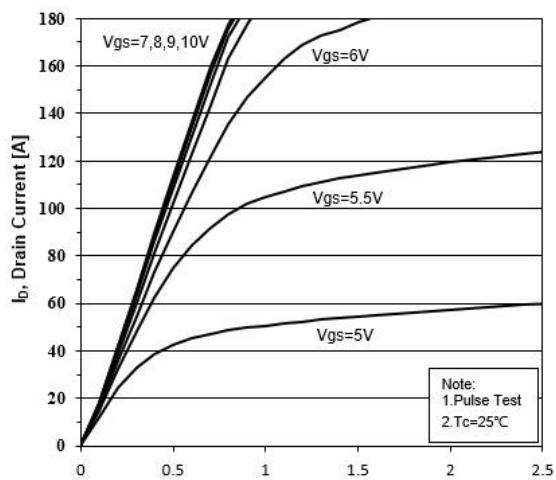**Figure 1. Safe Operating Area**

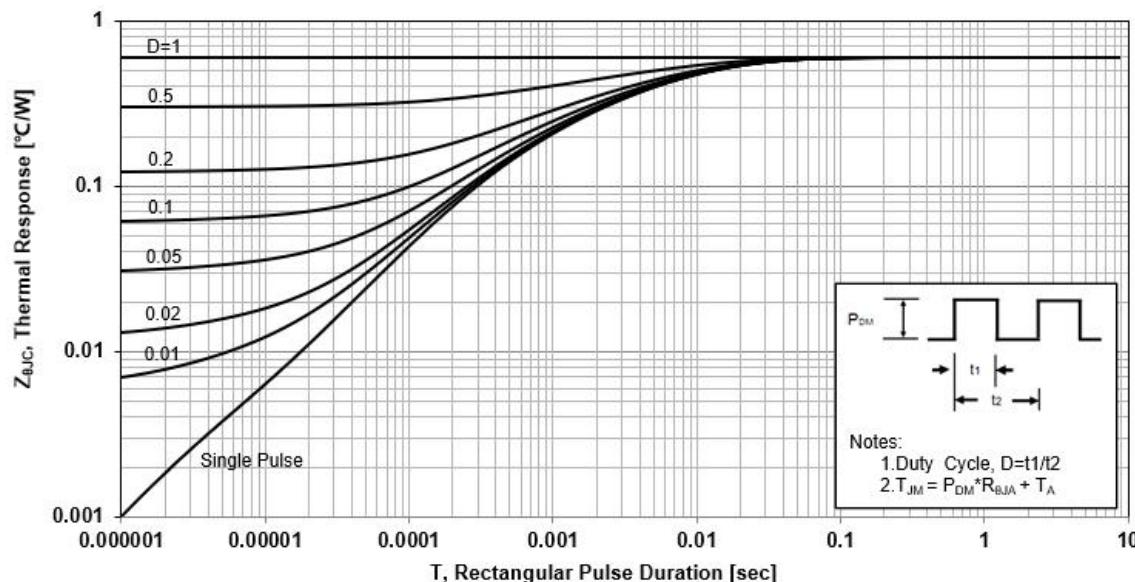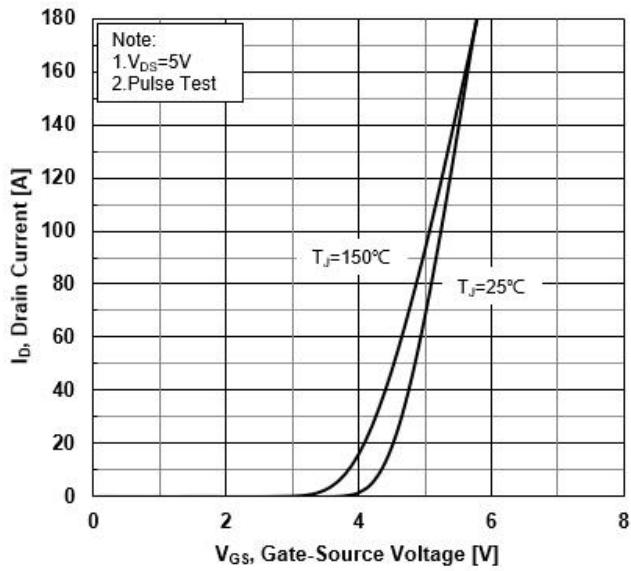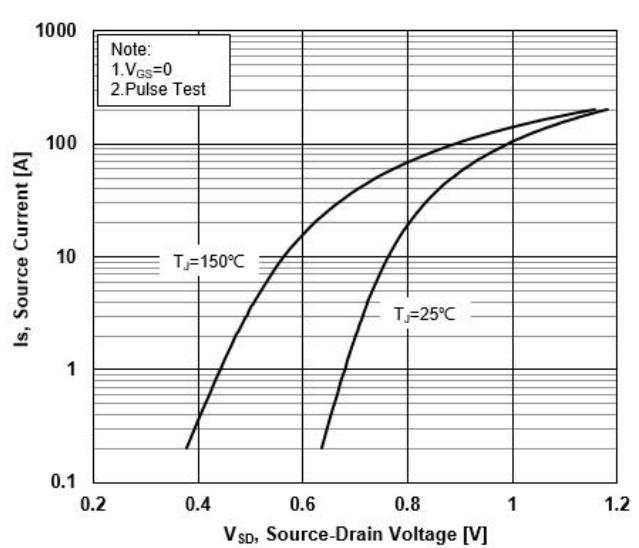**Figure 2. Maximum Power Dissipation vs Case Temperature**

**Figure 3. Maximum Continuous Drain Current vs Case Temperature**

**Figure 4. Typical Output Characteristics**


**Figure 5. Transient Thermal Impedance**

**Figure 6. Typical Transfer Characteristics**

**Figure 7. Source-Drain Diode Forward Characteristics**


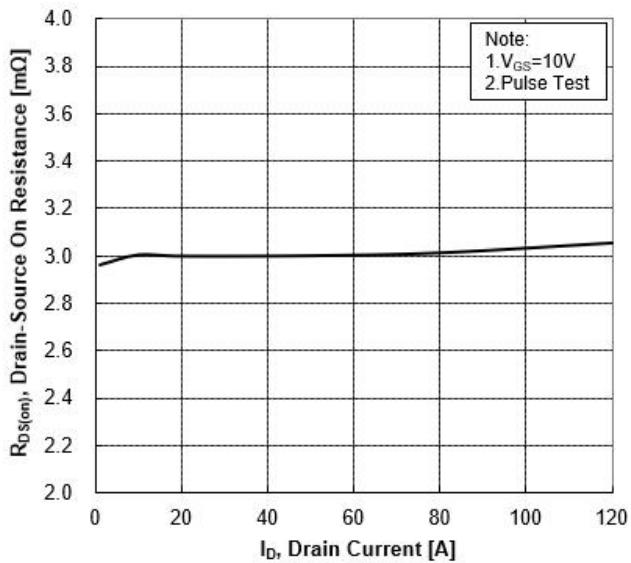
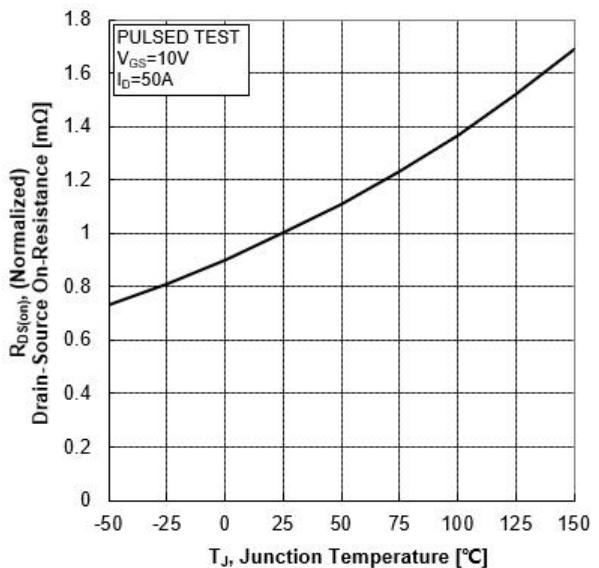
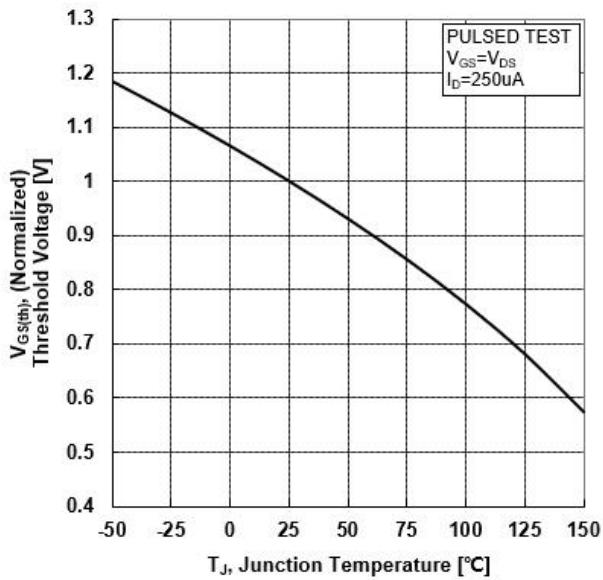
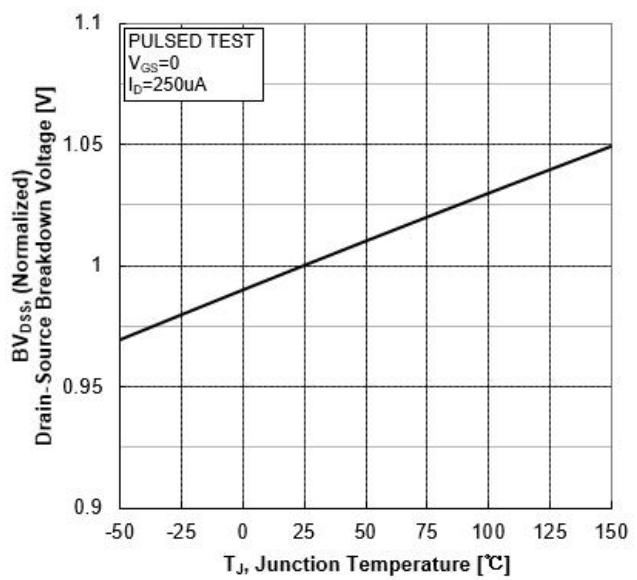
**Figure 8. Drain-Source On-Resistance vs Drain Current**

**Figure 9. Normalized On-Resistance vs Junction Temperature**

**Figure 10. Normalized Threshold Voltage vs Junction Temperature**

**Figure 11. Normalized Breakdown Voltage vs Junction Temperature**


Figure 12. Capacitance Characteristics










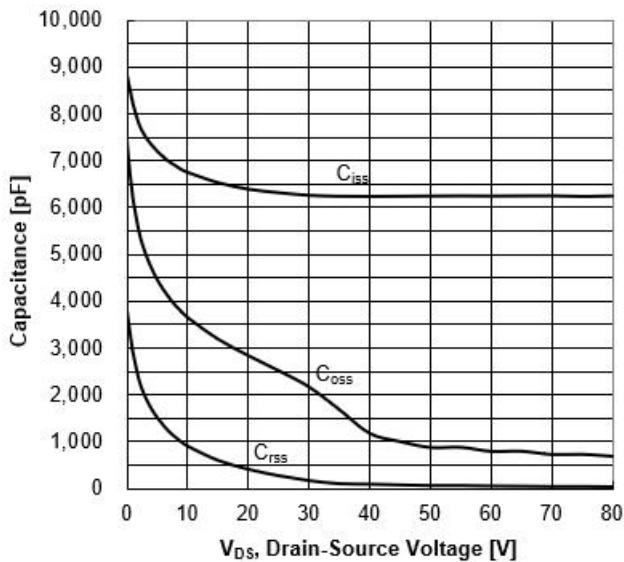



Figure 13. Typical Gate Charge vs Gate-Source Voltage

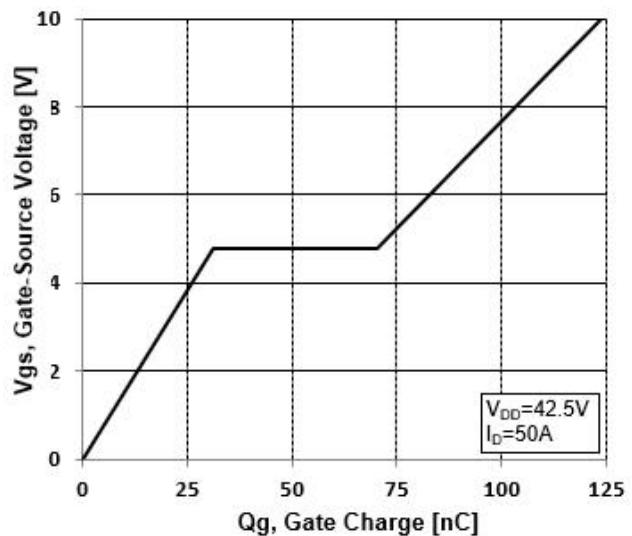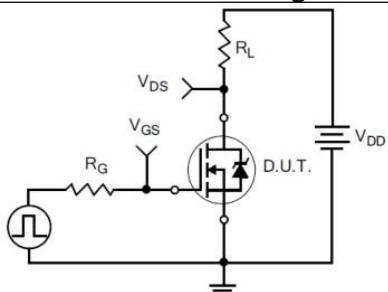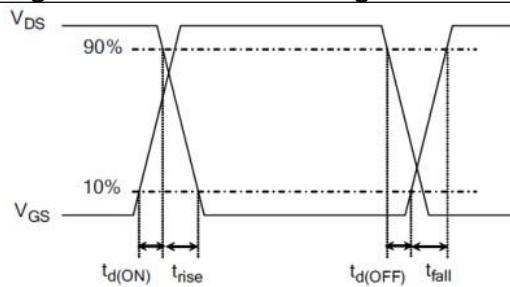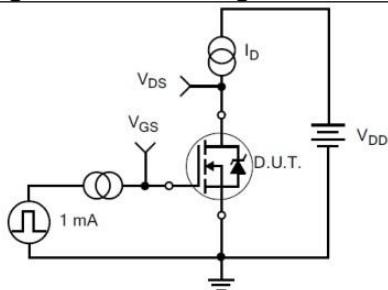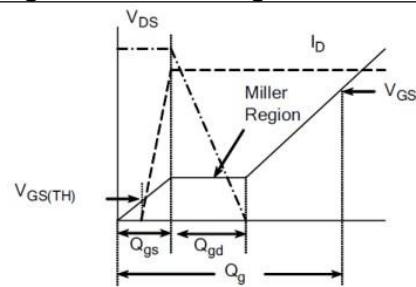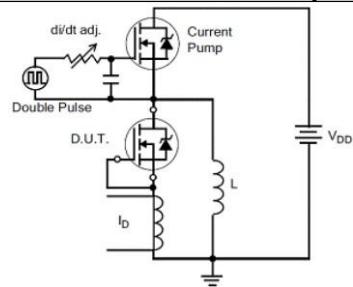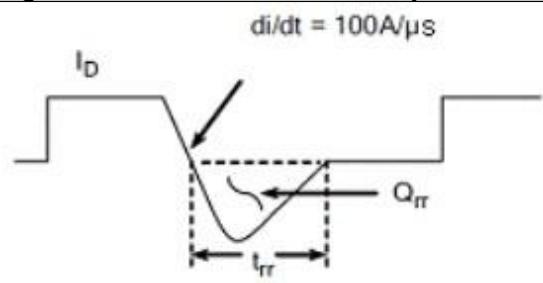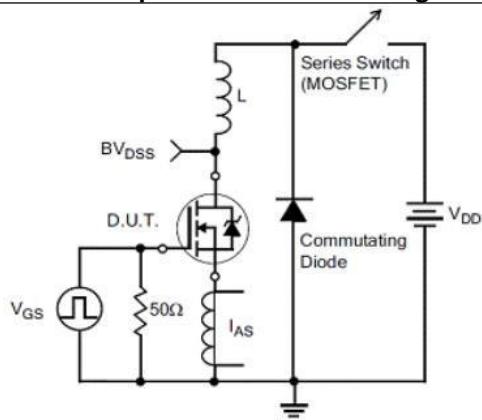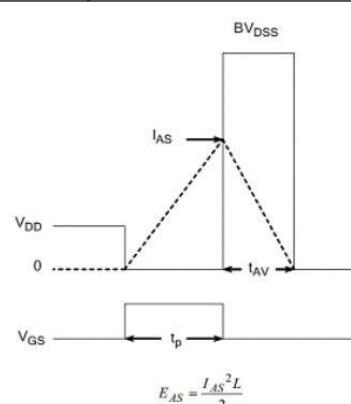

## Test Circuit and Waveform


**Figure 14. Resistive Switching Test Circuit**

**Figure 15. Resistive Switching Waveforms**

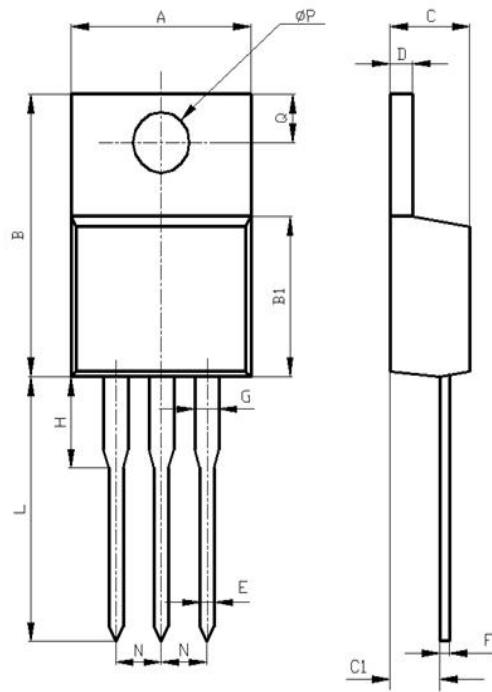**Figure 16. Gate Charge Test Circuit**

**Figure 17. Gate Charge Waveforms**

**Figure 18. Diode Reverse Recovery Test Circuit**

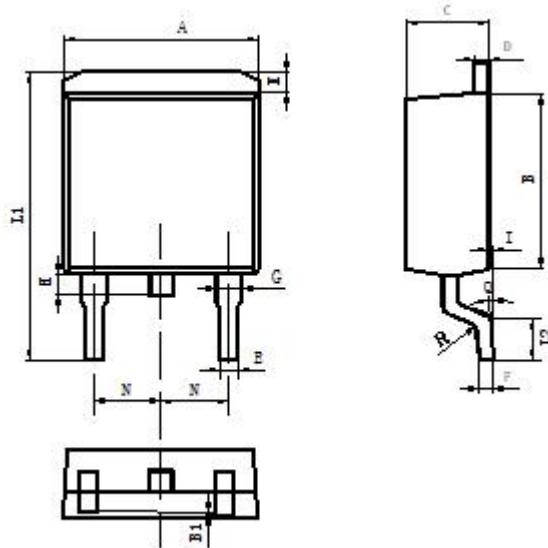**Figure 19. Diode Reverse Recovery Waveform**

**Figure 20. Unclamped Inductive Switching Test Circuit**

**Figure 21. Unclamped Inductive Switching Waveform**


## Package Description



Items	Values(mm)	
	MIN	MAX
A	9.60	10.6
B	15.0	16.0
B1	8.90	9.50
C	4.30	4.80
C1	2.30	3.10
D	1.20	1.40
E	0.70	0.90
F	0.30	0.60
G	1.17	1.37
H	2.70	3.80
L	12.6	14.8
N	2.34	2.74
Q	2.40	3.00
ØP	3.50	3.90

TO-220 Package



Items	Values(mm)	
	MIN	MAX
A	9.80	10.40
B	8.90	9.50
B1	0	0.10
C	4.40	4.80
D	1.16	1.37
E	0.70	0.95
F	0.30	0.60
G	1.07	1.47
H	1.30	1.80
K	0.95	1.37
L1	14.50	16.50
L2	1.60	2.30
I	0	0.2
Q	0°	8°
R	0.4	
N	2.39	2.69

TO-263 Package



迈诺斯科技

MPT035N08

**NOTE:**

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. Please do not exceed the absolute maximum ratings of the device when circuit designing.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. MOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. Shenzhen Minos reserves the right to make changes in this specification sheet and is subject to change without prior notice.

**CONTACT:**

**深圳市迈诺斯科技有限公司（总部）**

地址：深圳市福田区华富街道田面社区深南中路4026号田面城市大厦22B-22C

邮编：518025

电话：0755-83273777