841WB Liquid



EMF Shielding Paint

841WB is a 1-part, water-based conductive paint, pigmented with highly conductive nickel flake. It is easy to use, with no let-down and no heat cure necessary. It can be applied by spray, brush or roller. It adheres strongly to most injection-molded plastics, such as ABS, PBT and PVA. It also bonds well to drywall and can be painted over with common architectural paints.

841WB is designed to reduce EMI/RFI interferences in architectural, electric musical and electronics applications.



Features & Benefits

- Provides effective EMI/RFI shielding over a broad range of frequencies
- · Non-flammable and no noxious odors
- · Ships as a non-DG by air
- Low VOC content

Available Packaging

Cat. No.	Pack	aging Ne	t Vol.	Net Wt.
841WB-15N	/IL Jar	12	mL 2	21.7 g
841WB-150	ML Bottle	150	0 mL 2	271 g
841WB-850	OML Can	85	0 mL	1.53 kg
841WB-3.78	8L Can	3.6	60 L	6.51 kg

Contact Information

MG Chemicals, 1210 Corporate Drive Burlington, Ontario, Canada L7L 5R6

Email: support@mgchemicals.com

Phone: North America: +(1)800-340-0772

International: +(1) 905-331-1396 Europe: +(44)1663 362888

Cured Properties

Resistivity	2.7 x 10 ⁻² Ω·cm
Surface Resistance @ 50 µm	1.3 Ω/sq
Salt fog @ 35 °C [95 °F], 96 h	Excellent
Service Temperature Range	-40-120 °C

Usage Parameters

30	min
7	min
24 h @ 22	°C
3 h @ 65	°C
65	μm
50	μm
35 800	cm ² /L
	7 24 h @ 22 3 h @ 65 65 50 35 800

Uncured Properties

Viscosity @ 25 °C	143 cP
Density	1.8 g/mL
Percent Solids	60 %
Shelf Life	2 y
Calculated VOC	28 g/L

841WB Liquid



Application Instructions

Read the product SDS and Application Guide for more detailed instructions before using this product (downloadable at www.mgchemicals.com).

Recommended Preparation

Plastic—Clean the substrate with Isopropyl Alcohol, MG #824, so the surface is free of oils, dust, and other residues.

Drywall—For new drywall, apply directly on top of the drywall primer, after the primer has properly cured. When applying on top of existing paint, first wash the wall with a solution of T.S.P. diluted with water at a 1:10 ratio, to ensure good adhesion.

Paint Roller

This product may be applied with a standard paint roller. Thinning is not required.


Manual Spray Guns

Use a standard fluid nozzle gun to spray the paint. The settings listed below are recommendations; however, performance will vary with different brands:

•	LVMP	HVLP
Nozzle tip diameter	1.2–1.4 mm	1.2–1.4 mm
Inlet pressure	5–15 psi	5–15 psi
Air flow	10-15 SCFM	8.3 SCFM
Air cap	5–10 psi	5-10 psi


When using a pressure pot and agitator, keep the agitator at low mixing speed with air pressure of 20–50 psi. Use the lowest pressure necessary to keep the particles suspended.

Shielding Attenuation

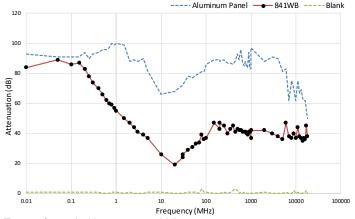

Test performed with a two-coat thickness.

Surface Resistance by Paint Thickness

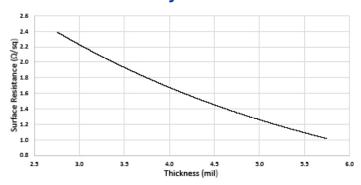

Selective Coating

For higher volume applications, paint can be applied via selective coating equipment. Use a system with constant fluid recirculation to keep the particles from settling in the lines. A fluid nozzle ranging from 1.2 mm –1.4 mm diameter and 5–10 psi fluid pressure is recommended depending on nozzle size.

Cure Instructions

Allow to dry at room temperature for 24 hours, or after letting sit for 30 minutes, cure the paint in an oven for 3 hours @ 65 °C.

Clean-up

Clean the spray system and equipment with tap water after use.

Storage and Handling

Store between -20 and 27 °C in a dry area, away from sunlight (see SDS).

If exposed to freezing temperatures during storage or transport, keep product at room temperature for at least two days and ensure it is fully homogeneous prior to use.

Disclaimer

This information is believed to be accurate. It is intended for professional end-users who have the skills required to evaluate and use the data properly. M.G. Chemicals Ltd. does not guarantee the accuracy of the data and assumes no liability in connection with damages incurred while using it.