




JX2060K

N-Channel Enhancement Mode MOSFET

V_{DS}	$R_{DS(on)}$ Typ.	I_D Max.
20V	4.7m Ω @ 4.5V	60A
	6.3m Ω @ 2.5V	




Schematic Diagram

1.Features

- ◆ 20V MOSFET technology
- ◆ Low on-state resistance
- ◆ Fast switching
- ◆ $V_{GS} \pm 12V$

2.Applications

- ◆ Power Switching Application
- ◆ Load Switching



TO-252
Pin Description

3.Package Marking and Ordering Information

Part no.	Marking	Package	PCS/Reel	PCS/CTN.
JX2060K	JX2060K	TO-252	2,500	25,000

4.Absolute Max Ratings at $T_a=25^\circ C$ (Note1)

Parameter	Symbol	Maximum	Units
Drain to Source Voltage	V_{DSS}	20	V
Gate to Source Voltage	V_{GSS}	± 12	V
Drain Current (DC)	I_D	60	A
Drain Current (Pulse), $PW \leq 300\mu s$	I_{DP}	240	A
Total Dissipation	P_D	37	W
Avalanche Energy, Single Pulsed	E_{AS}	144	mJ
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature	T_{stg}	-55 to +150	$^\circ C$

Note 1: Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



5. Thermal Resistance Ratings

Parameter	Symbol	Value	Unit
Junction to Ambient	$R_{\theta JA}$	32	$^{\circ}C/W$
Junction to case	$R_{\theta JC}$	3.4	$^{\circ}C/W$

Note 2 : When mounted on 1 inch square copper board $t \leq 10$ sec The value in any given application depends on the user's specific board design.


6. Electrical Characteristics at $T_a=25^{\circ}C$ (Note 3)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Drain to Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D = 250\mu A, V_{GS} = 0V$	20			V
Zero-Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 20V, V_{GS} = 0V$			1	μA
Gate to Source Leakage Current	I_{GSS}	$V_{GS} = \pm 12V, V_{DS} = 0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_{DS}=250\mu A$	0.5	0.7	1.2	V
Static Drain to Source On-State Resistance	$R_{DS(on)}$	$I_D = 25A, V_{GS} = 4.5V$	-	4.7	5.8	m Ω
		$I_D = 15A, V_{GS} = 2.5V$	-	6.3	9.0	m Ω
Input Capacitance	C_{iss}	$V_{GS}=0V,$ $V_{DS}=10V,$ Frequency=1.0MHz		2007		pF
Output Capacitance	C_{oss}				278	pF
Reverse Transfer Capacitance	C_{rss}				252	pF
Turn-ON Delay Time	$t_{d(on)}$	$V_{DD} = 10V, I_D = 20A,$ $V_{GS} = 4.5V,$ $R_G = 3\Omega,$		12		ns
Rise Time	t_r				33	ns
Turn-OFF Delay Time	$t_{d(off)}$				48	ns
Fall Time	t_f				95	ns
Total Gate Charge	Q_g	$V_{DS} = 10V,$ $V_{GS} = 0$ to $4.5V,$ $I_D = 20A$		23		nC
	Q_{gs}			4		nC
	Q_{gd}			7		nC
Diode Forward Voltage	V_{FSD}	$I_S = 25A, V_{GS} = 0V$	0.5	0.85	1.2	V


Note 3 : Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.




7. Typical electrical and thermal characteristics

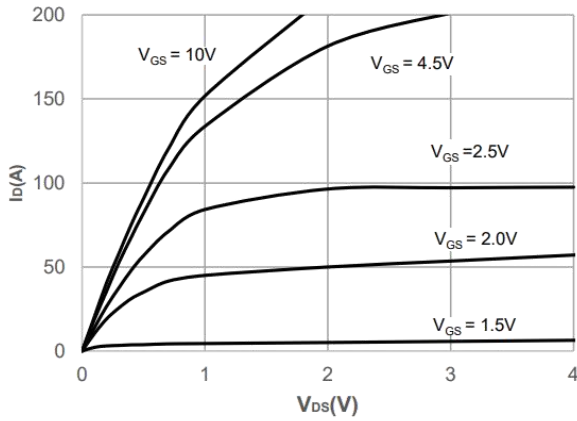


Output Characteristics

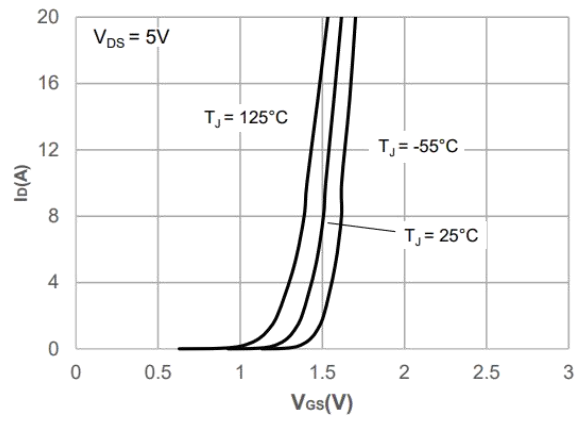


Typical Transfer Characteristics

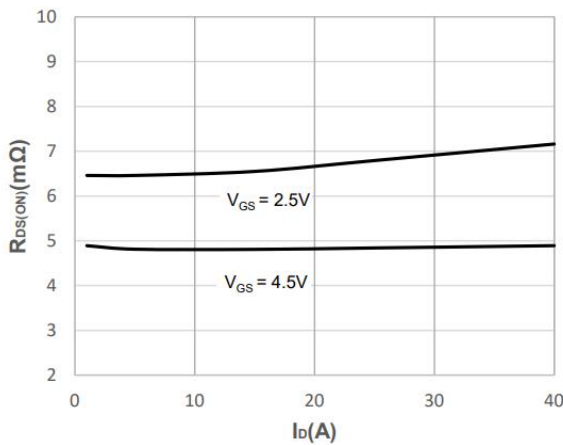


On-resistance vs. Drain Current

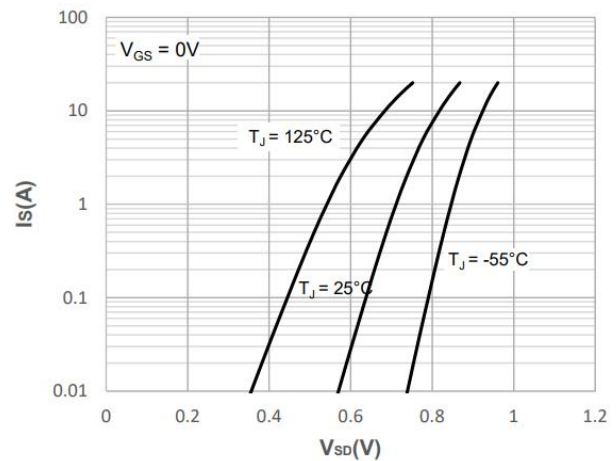

Body Diode Characteristics

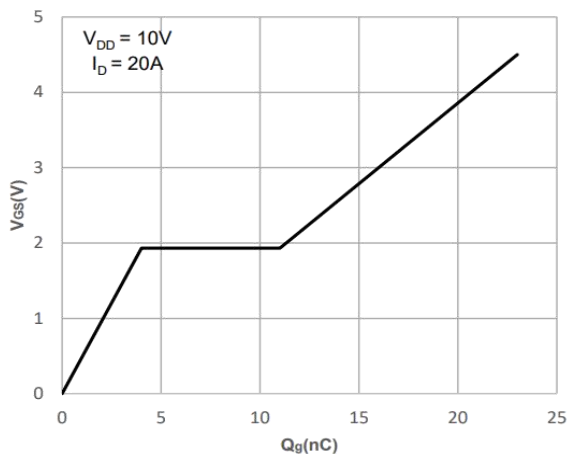

Gate Charge Characteristics

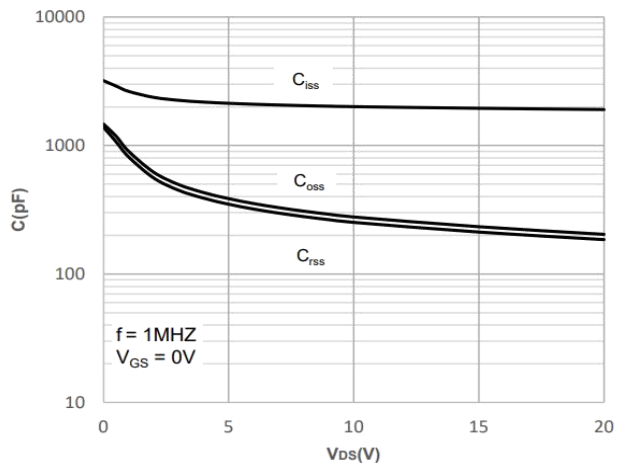


Capacitance Characteristics




JX2060K


N-Channel Enhancement Mode MOSFET

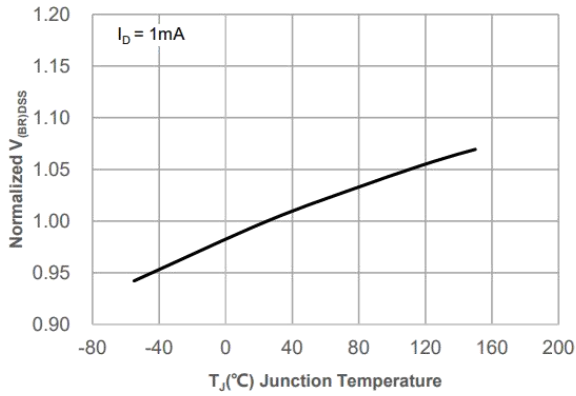


Normalized Breakdown Voltage vs. Junction Temperature

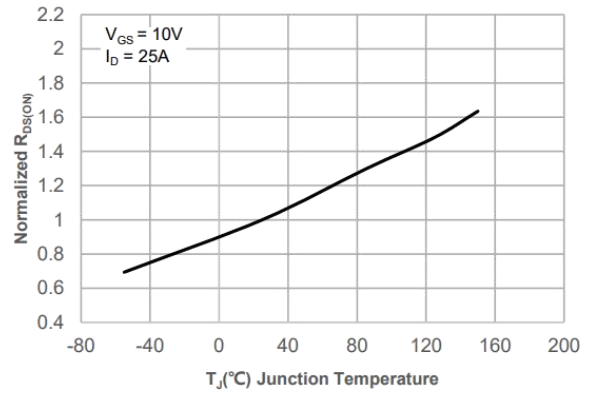


Normalized on Resistance vs. Junction Temperature

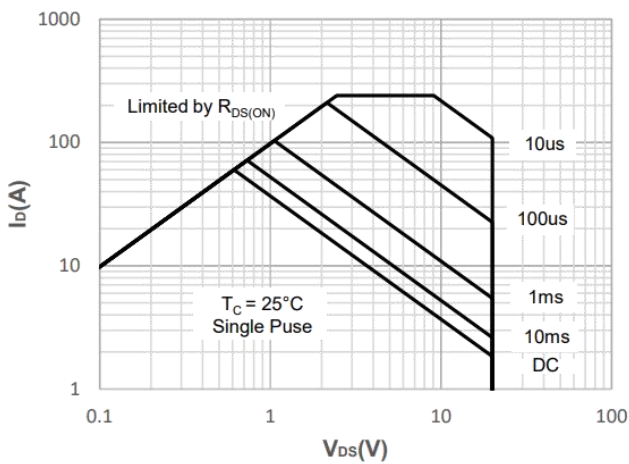


Maximum Safe Operating Area

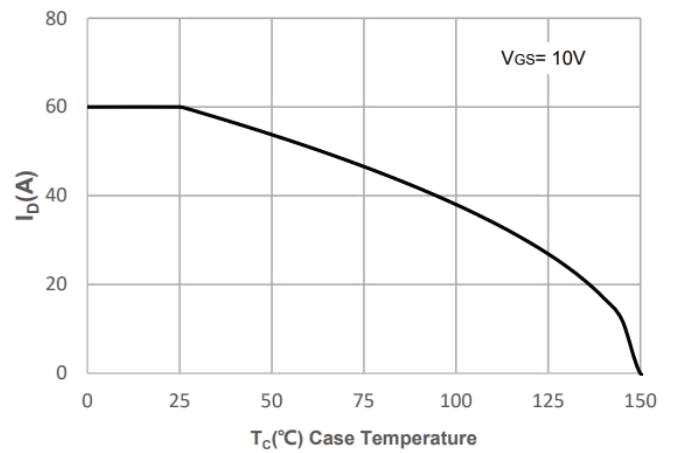

Maximum Continuous Drain Current vs. Case Temperature

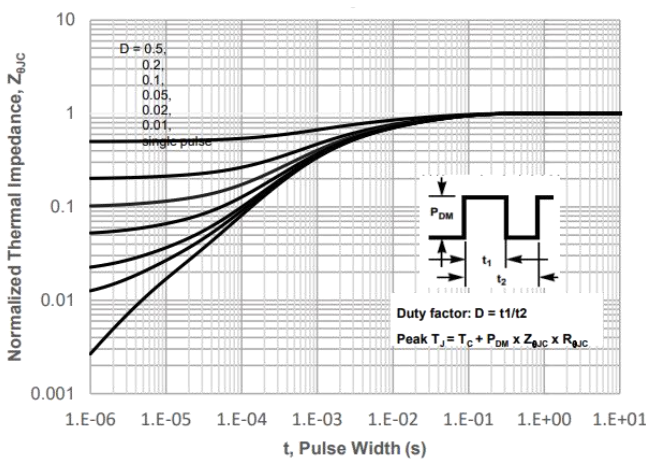

Normalized Maximum Transient Thermal Impedance

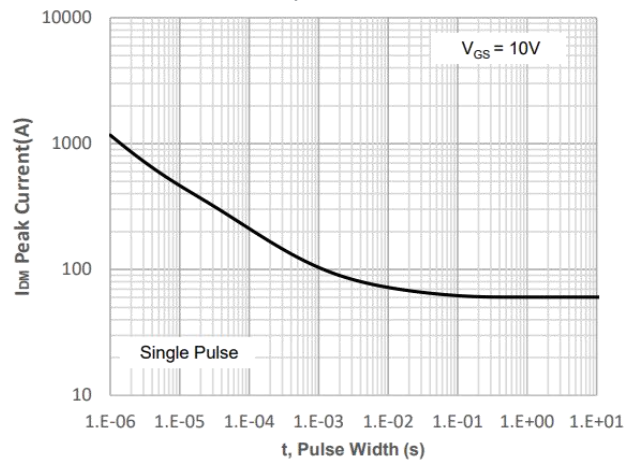

Peak Current Capacity






JX2060K

N-Channel Enhancement Mode MOSFET

8.Package Dimensions

TO-252(D-PAK) Package Outline Dimensions

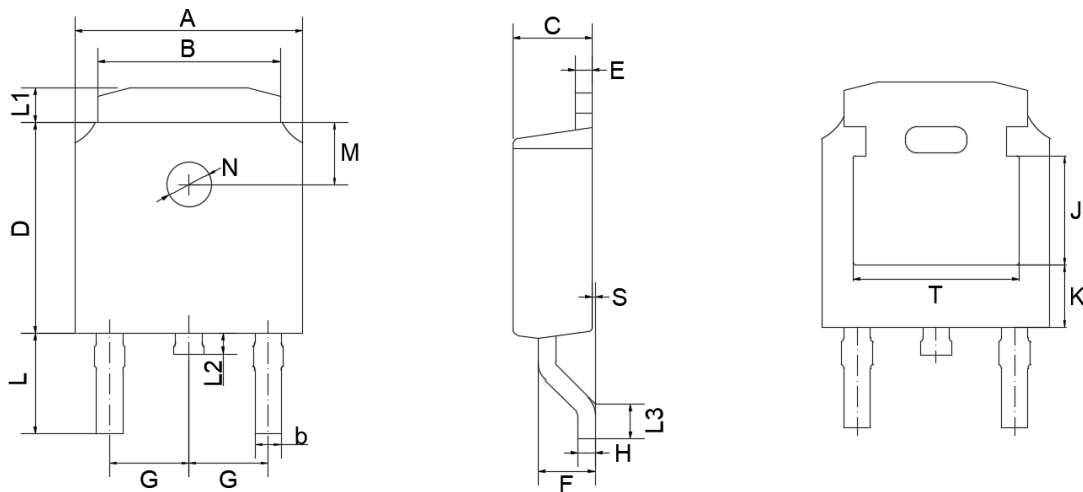

TO-252(D-PAK) mechanical data

UNIT		A	B	b	C	D	E	F	G	H	L	L1	L2	L3	S	M	N	J	K	T
mm	max	6.7	5.5	0.86	2.5	6.3	0.6	1.8	2.29 TYPICAL	0.55	3.1	1.4	1.0	1.75	0.1	1.8 TYPICAL	1.3 TYPICAL	3.16	1.80	4.83
	min	6.3	5.1	0.66	2.1	5.9	0.4	1.3		0.45	2.7	0.8	0.6	1.40	0.0			ref.	ref.	ref.
mil	max	264	217	33	98	248	24	71	90 TYPICAL	22	122	55	39	69	4	71 TYPICAL	51 TYPICAL	124	71	190
	min	248	201	26	83	232	16	51		18	106	31	24	55	0			ref.	ref.	ref.

