



FEATURES AND BENEFITS

2" X 4" X 1.3" Package	Approved to EN/CSA/IEC/UL62368-1
Suitable For 1U Applications	Power Fail Signal
110W W/air, 80W Convection Cooled	Remote Sense
Universal Input 90VAC-264VAC	3 Year Warranty
Efficiency 87% Typical	RoHs Compliant



MODEL SELECTION

Model Number	Volts*		Output Current**		Ripple & Noise***	Total Regulation	OVP Threshold
			w/200LFM air	Convection			
CINT3110A0508K01	V1	5V	14.0A	10.0A	1.0% pk-pk	±2%	7.5V max
	V2	12V	6.0A	4.5A	1.0% pk-pk	±3%	115%-135%
	V3	-12V	1.0A	1.0A	2.0% pk-pk	±10%	115%-135%
CINT3110A1708K01	V1	5V	14.0A	10.0A	1.0% pk-pk	±2%	7.5V max
	V2	15V	4.5A	3.5A	1.0% pk-pk	±3%	115%-135%
	V3	-15V	1.0A	1.0A	2.0% pk-pk	±10%	115%-135%
CINT3110A1908K01	V1	5V	12.0A	8.0A	1.0% pk-pk	±2%	7.5V max
	V2	24V	4.0A	3.0A	1.0% pk-pk	±3%	115%-135%
	V3	-24V	1.0A	1.0A	2.0% pk-pk	±10%	115%-135%

Notes:

- * 5V output is adjustable with +/-5% range
- ** Total convection power is 80 watts.
- *** Measured with noise probe directly across output terminals, and load terminated with 0.1µF ceramic and 10µF low ESR capacitors. Ripple & Noise of V2 at no load is 2% maximum.



INPUT

Input Voltage and Frequency	100VAC–240VAC, ±10%, 47Hz–63Hz, 1Ø 120VDC–370VDC
Input Current	115VAC: 1.5A, 230VAC: 0.75A
Inrush Current	264VAC, cold start: will not exceed 45A
Input Fuses	F1, F2: 2.5A, 250VAC fuses provided on all models
Earth Leakage Current	<290µA@264VAC, 60Hz, NC
Efficiency	87% typical at 230VAC

SAFETY

Safety Standards	EN/CSA/IEC/UL62368-1
------------------	----------------------

ISOLATION

Isolation Safety Rating	Input-Output: 4000VAC Input-Ground: 1800VAC Output-Ground: 500VAC
-------------------------	-------------------------------------------------------------------------

RELIABILITY

MTBF	2,45,000 hours, 25°C Ambient, 110VAC input
------	--------------------------------------------

ENVIRONMENT

Operating Temperature	-10°C to +70°C
Relative Humidity	5% to 95%, non-condensing
Weight	200 grams
Dimensions	2.0" x 4.0" x 1.3"
Temperature Derating	Derate output power linearly above 50°C to 50% at 70°C
Altitude	Operating: -500 feet to 10,000 feet Non-operating: -500 feet to 40,000 feet
Storage Temperature	-40°C to +85°C
Vibration	Operating: 0.003g ² /Hz, 1.5 grams overall, 3 axes, 10 min/axis Non-Operating: 0.026g ² /Hz, 5.0 grams overall, 3 axes, 1 hour/axis
Shock	Operating: Half-sine, 20gpk, 10mS, 3 axes, 6 shocks total Non-Operating: Half-sine, 40 gpk, 10mS, 3 axes, 6 shocks total

OUTPUT

Output Voltage	See models chart
Output Power	110W continuous with 200 lfm airflow, 80W convection cooled – See chart for specific voltage model ratings
Turn On Time	Less than 2 sec. @115VAC (inversely proportional to input voltage and thermistor temperature)
Hold-up Time	16mS typical at 110W, 120VAC input
Adjustment Output Voltage	±5% from nominal on 5V output
Ripple and Noise	See models chart
Total Regulation	See models chart
Switching Frequency	PFC: 75kHz typical
Transient Response	500µS typ. for return to within 0.5% of nominal, 50% load step. $\Delta i/\Delta t < 0.2A/\mu S$, Max Volt Deviation = 3%
Minimum Load	Not required

PROTECTION

Overvoltage Protection	See models chart for trip range
Short Circuit Protection	Provided - no damage will occur if the output is shorted
Overload Protection	150%–300% above rating for V2 & V3, 110%–200% for V1. Hiccup Mode

EMI/EMC COMPLIANCE

Conducted Emissions	EN55011/22 Class B, FCC Part 15, Subpart B, Class B
Radiated Emissions	EN55011/22 Class A; FCC Part 15, Subpart A, Class A
Static Discharge Immunity	EN61000-4-2, Criteria A, 6kV Contact Discharge, 8kV air discharge
Radiated RF Immunity	EN61000-4-3, 3V/m. Criteria A
EFT/Burst Immunity	EN61000-4-4, 2kV/5kHz, Criteria A
Line Surge Immunity	EN61000-4-5, 1kV differential, 2kV common-mode, Criteria A
Conducted RF Immunity	EN61000-4-6, 3Vrms, Criteria A
Power Frequency Magnetic Field Immunity	EN61000-4-8, 3A/m, Criteria A
Voltage Dip Immunity	EN61000-4-11, 0% Vin, 0.5 cycle; 40% Vin, 5 cycles; 70% Vin, 25 cycles; Criteria A
Line Harmonic Emissions	EN61000-3-2, Class A, B, C, & D
Flicker Test	EN61000-3-3, Complies (dmax<6%)



AUXILIARY SIGNALS

AC Power Fail	During normal operation, stays HIGH. Signal goes LOW with at least 6mS warning before loss of DC output from AC failure
Remote Sense	(5V output, optional) Will compensate for 0.5V drop min. Will operate without remote sense connected. Reverse connection protected
DC OK	Open collector logic signal goes and stays HIGH 100mS to 500mS after main output reaches regulation

Notes:

- Specifications are for convection rating at factory settings at 115VAC input, 25°C ambient unless otherwise stated.
- For DC input an external DC safety rated fuse must be used.

CONNECTOR INFORMATION

Input Connector J100	Ground J101	DC Output Connector J200	Signal Connector J300
PIN 1) AC NEUTRAL PIN 2) EMPTY PIN 3) AC LINE	0.187" FASTON TAB	PIN 1) +V1 PIN 4) GND PIN 7) V2 PIN 2) +V1 PIN 5) GND PIN 8) V3 PIN 3) GND PIN 6) GND	PIN 1) Power Fail/DC OK PIN 2) GND PIN 3) +Remote Sense PIN 4) -Remote Sense
Mating Connector: Molex 09-50-3031 Pins = 08-52-0072 AMP #640250-3 Pins = 3-640706-1	Mating Connector: Molex 01-90020001	Mating Connector: Amp #640250-8 Pins=Amp #3-640706-1	Mating Connector: Amp #1375820-4 Pin= Amp #1375819

ISOLATION SPECIFICATIONS


Parameter	Conditions/Description	Min	Nom	Max	Units
Insulation Safety Rating	Input/Ground Input/Output Output/Ground		Basic Reinforced Operational		
Electric Strength Test Voltage	Input/Ground Input/Output Output/Ground	1800 4000 500	-	-	VAC VAC VAC

LEAKAGE CURRENT

Parameter	Conditions/Description	Max
Earth Leakage Current	Normal Condition (NC) Single Fault Condition (SFC)	290µA 420µA
Touch Current	Normal Condition (NC) Single Fault Condition (SFC)	90µA 170µA



MECHANICAL DRAWING

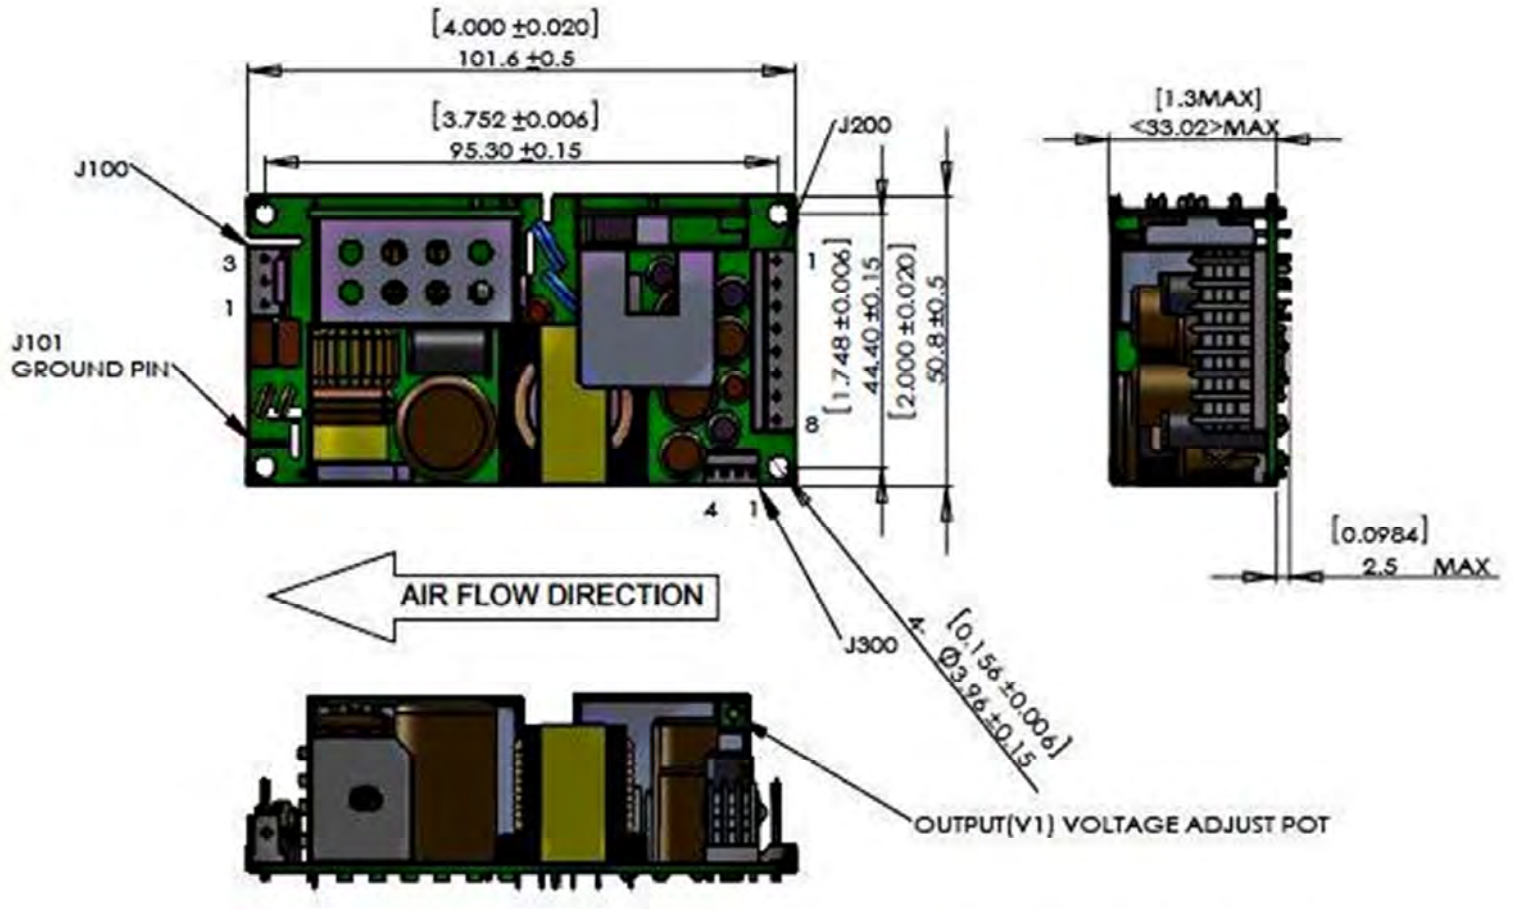

Notes:

1. All dimensions in inches (mm), tolerance is ± 0.02 .
2. Mounting holes should be grounded for EMI purpose.
3. Mounting J101 is safety ground connection.
4. This power supply requires mounting on metal standoffs 0.20" (5 mm) in height.

INPUT SPECIFICATIONS

All specifications apply over specified input voltage, output load, and temperature range, unless otherwise noted.

Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage		90	115/230	264	VAC
Input Frequency		47	50/60	63	Hz
Input Current	115VAC/max load			1.5	A
Input Current	230VAC/max load			0.75	A
Inrush Current	264VAC, cold start, 25°C	-	-	45	A
Efficiency	$V_{i \text{ nom}} I_{o \text{ nom}}$ CINT3110A0508K01 CINT3110A1708K01 CINT3110A1908K01	-	87%	-	%



OUTPUT SPECIFICATIONS

Parameter	Conditions/Description	Min	Nom	Max	Units
Output Current V1 Output Current V2 Output Current V3	CINT3110A0508K01	0 0 0	10.0 4.5 1	14.0 6.0 1	ADC
Output Current V1 Output Current V2 Output Current V3	CINT3110A1708K01	0 0 0	10.0 3.5 1	14.0 4.5 1	ADC
Output Current V1 Output Current V2 Output Current V3	CINT3110A1908K01	0 0 0	8.0 3.0 1	12.0 4.0 1	ADC
Static Line Regulation V1	$V_i \text{ min}-V_i \text{ max}, V_{i \text{ nom}}, 0\%-100\% I_{o1 \text{ max}}$	-2	-	2	% $V_o \text{ nom}$
Static Line Regulation V2	$V_i \text{ min}-V_i \text{ max}, V_{i \text{ nom}}, 0\%-100\% I_{o2 \text{ max}}$	-3	-	3	% $V_o \text{ nom}$
Static Line Regulation V3	$V_i \text{ min}-V_i \text{ max}, V_{i \text{ nom}}, 0\%-100\% I_{o3 \text{ max}}$	-10	-	10	% $V_o \text{ nom}$
Static Load Regulation V1 (Droop Characteristic)	$V_i \text{ min}-V_i \text{ max}, V_{i \text{ nom}}, 0\%-100\% I_{o1 \text{ max}}$	-2	-	2	% $V_o \text{ nom}$
Static Load Regulation V2 (Droop Characteristic)	$V_i \text{ min}-V_i \text{ max}, V_{i \text{ nom}}, 0\%-100\% I_{o2 \text{ max}}$	-3	-	3	% $V_o \text{ nom}$
Static Load Regulation V3 (Droop Characteristic)	$V_i \text{ min}-V_i \text{ max}, V_{i \text{ nom}}, 0\%-100\% I_{o3 \text{ max}}$	-10	-	10	% $V_o \text{ nom}$
Hold-Up Time	$V_{in} = 120\text{VAC}, P_o = 110\text{W}$	16	-	-	mS
Dynamic Load Regulation V1, V2, V3	Load change =50%, $di/dt = 0.2\text{A}/\mu\text{S}$	0	-	3	% $V_o \text{ nom}$
Start-Up Time	$V_{in} = 115\text{VAC}, I_{o \text{ nom}}$	0	-	2	S
Ripple & Noise V1	20MHz bandwidth	0	-	1%	% $V_o \text{ nom}$
Ripple & Noise V2	20MHz bandwidth	0	-	1%	% $V_o \text{ nom}$
Ripple & Noise V3	20MHz bandwidth	0	-	2%	% $V_o \text{ nom}$

PROTECTION SPECIFICATIONS

All specifications apply over specified input voltage, output load, and temperature range, unless otherwise noted.


Parameter	Conditions/Description	Min	Nom	Max	Units
Input Fuse	T2.5A/250V internal fuse in both line & neutral	Not user accessible			
Input Transient Protection	2KV(CM) and 1KV(DM) surge			2	KV (CM)
Short Circuit Protection		Hiccup Mode			
Overload Protection		Hiccup Mode			
Overvoltage Protection	Latching Type, recycle AC input to reset	See models chart for trip ranges			



CHARACTERISTIC CURVES

Output vs. Temperature



80W convection cooled and 110W continuous with 200 LFM airflow. Derate output power to 50% at 70°C.

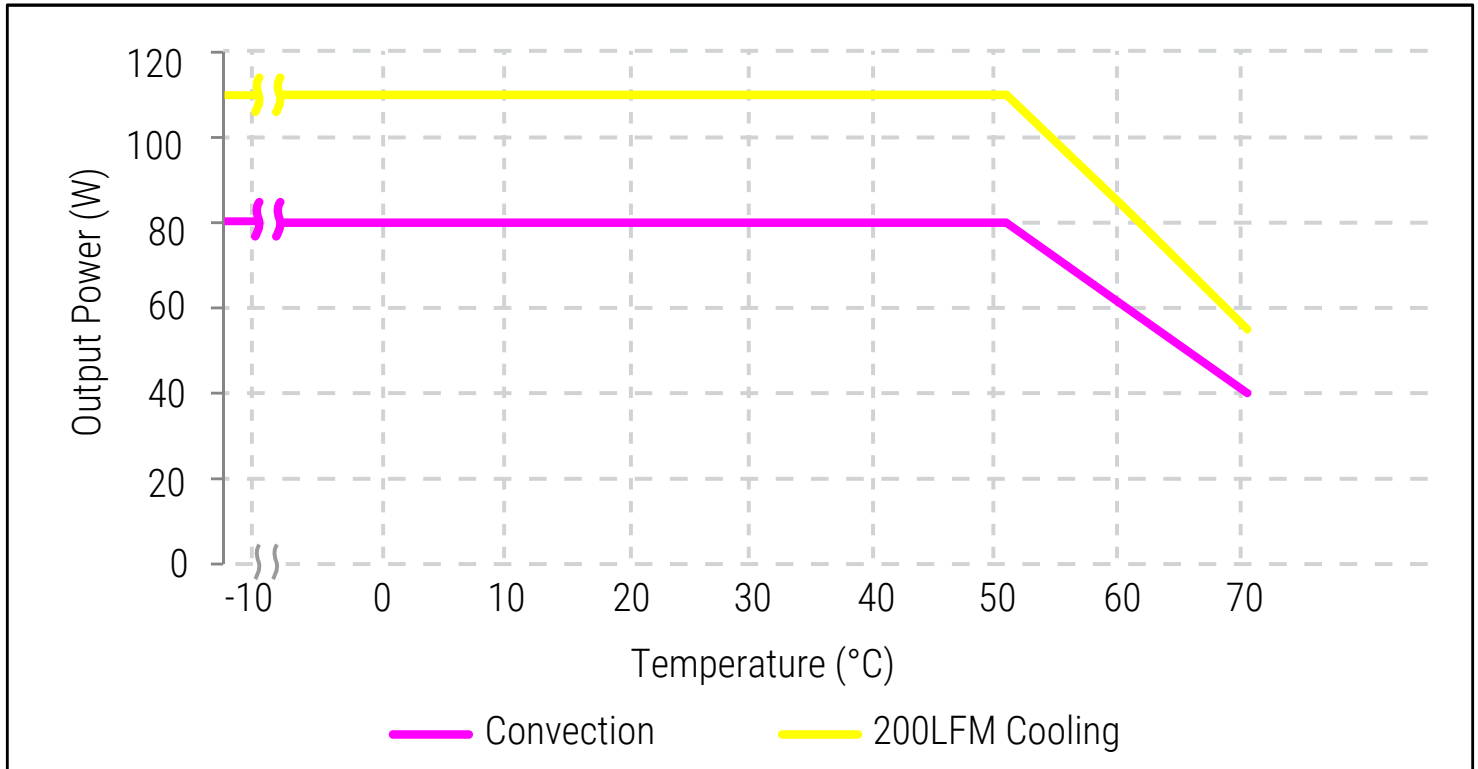





Ripple & Noise

To verify that the output ripple and noise does not exceed the level specified in the product specification. Measured using a scope probe socket with 0.1μF ceramic and a 10μF electrolytic capacitor connected in parallel across it, BW limit with 20MHz.

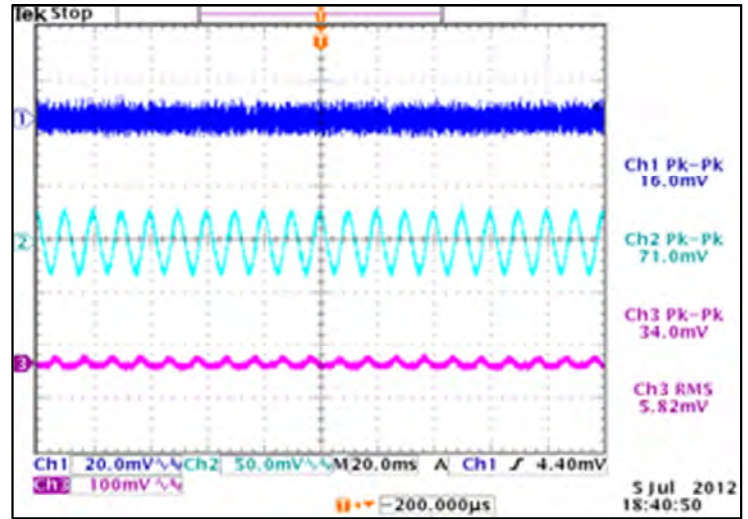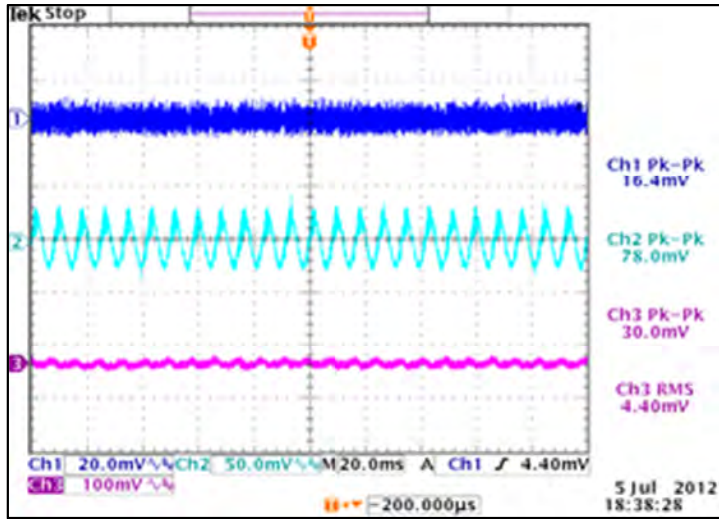

Output Transient Response V1



50% load step within the regulation limits of minimum and maximum load, di/dt<0.2A/μSec. Recovery time not specified as there is no laps in regulation with a 50% Load Step. Maximum voltage deviation is 3%.

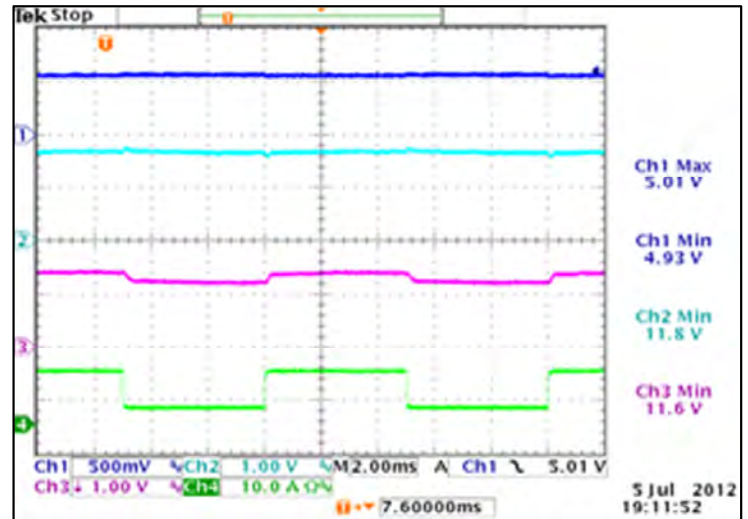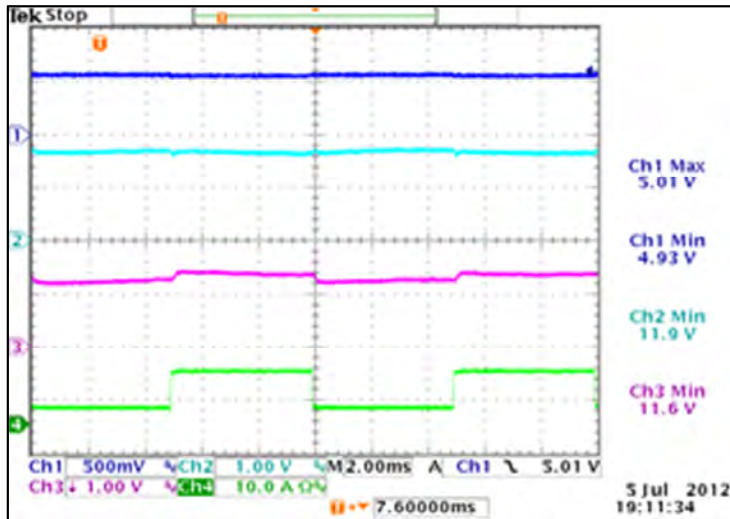





Output Transient Response V2

50% load step within the regulation limits of minimum and maximum load, $di/dt < 0.2A/\mu Sec$. Recovery time not specified as there is no laps in regulation with a 50% Load Step. Maximum voltage deviation is 3%.

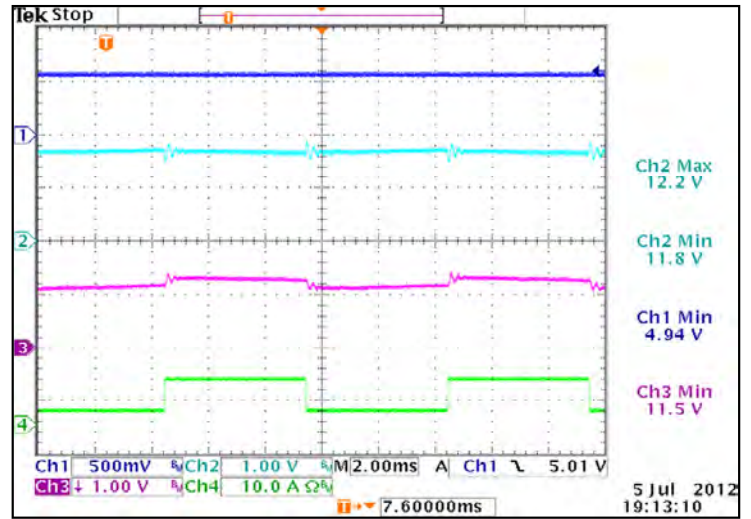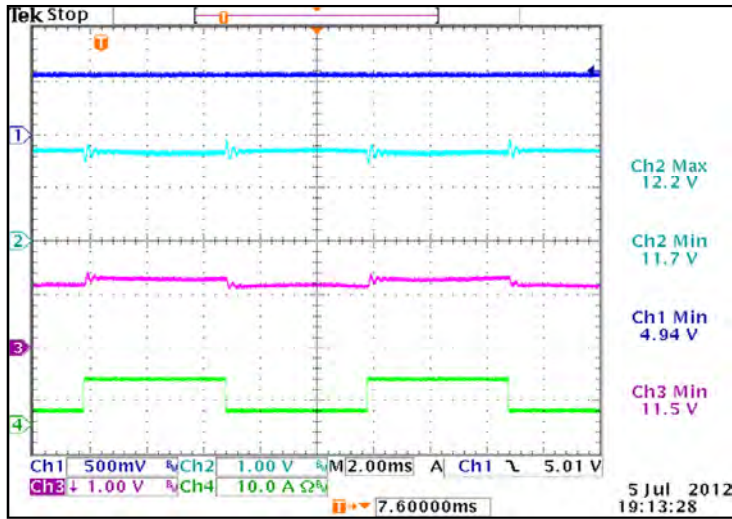

Output Transient Response V3



50% load step within the regulation limits of minimum and maximum load, $di/dt < 0.2A/\mu Sec$. Recovery time not specified as there is no laps in regulation with a 50% Load Step. Maximum voltage deviation is 3%.

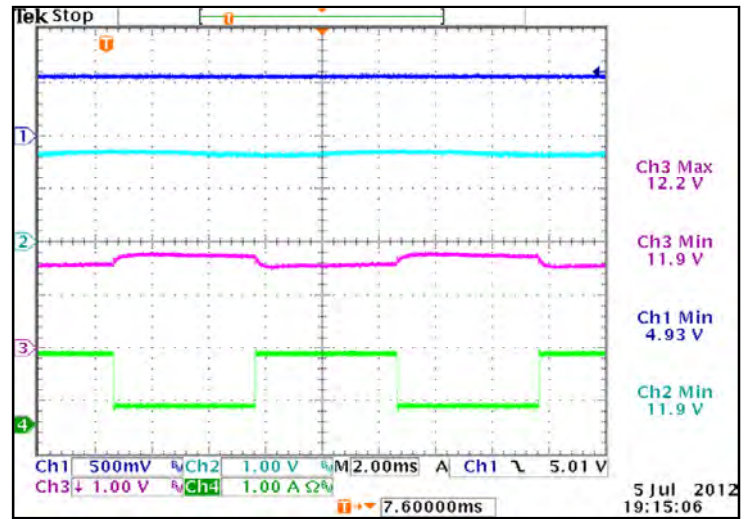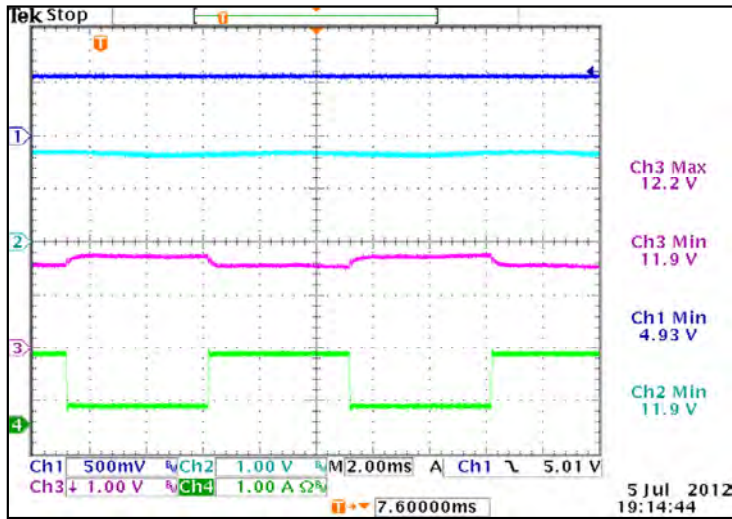





Output Overload Characteristic V1

Supply shall protect itself against Overload conditions. The Power Supply shall recover from Overload Conditions without operator intervention.

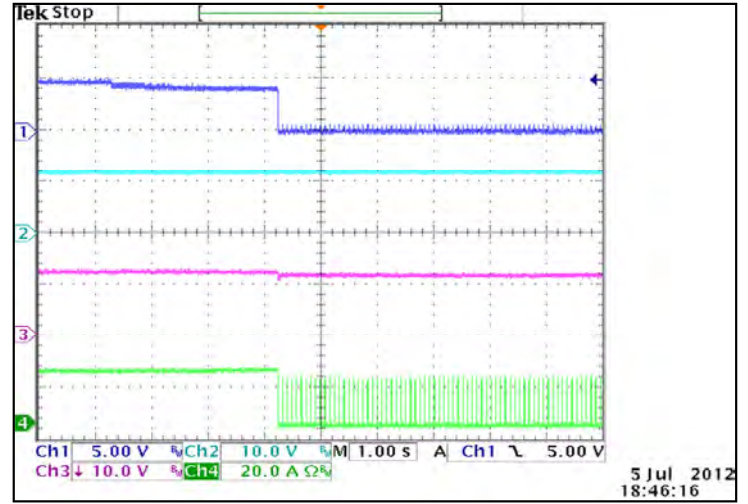
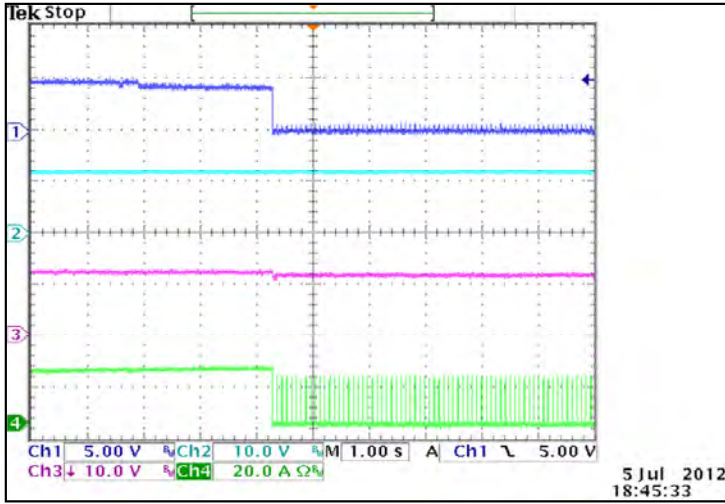


Output Overload Characteristic V2

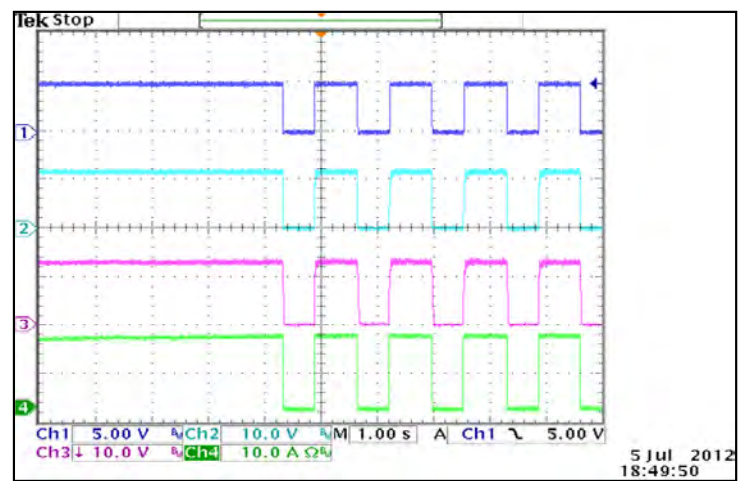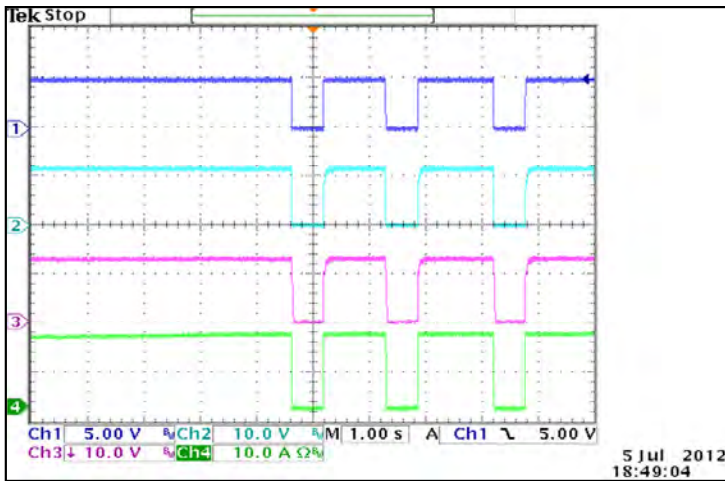





Output Overload Characteristic V3

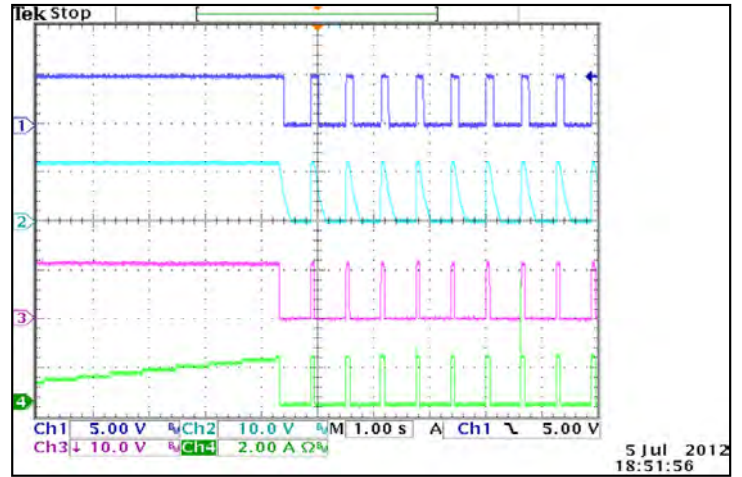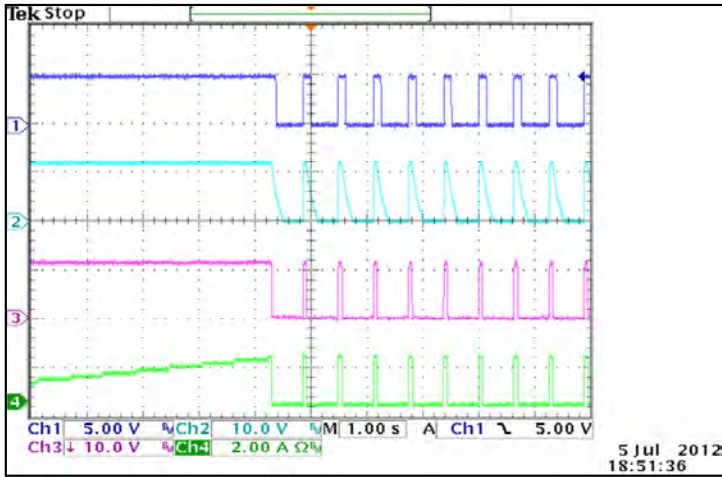



Output Short Circuit Characteristic V1

Supply shall protect itself against Short Circuit conditions. The Power Supply shall recover from short circuit conditions without operator intervention.

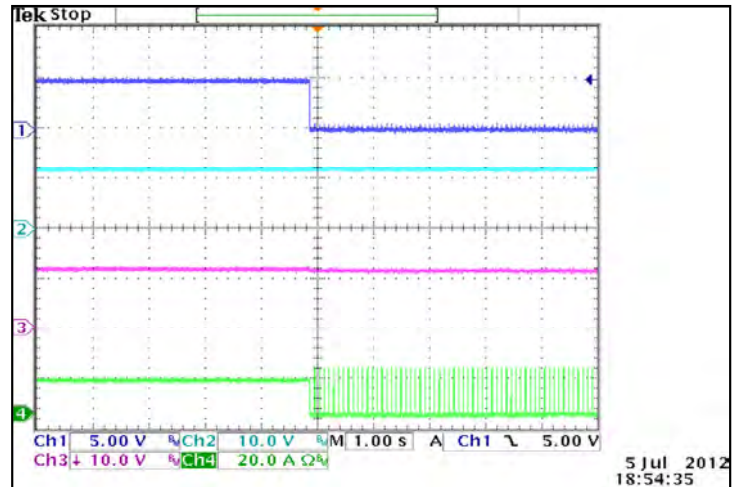
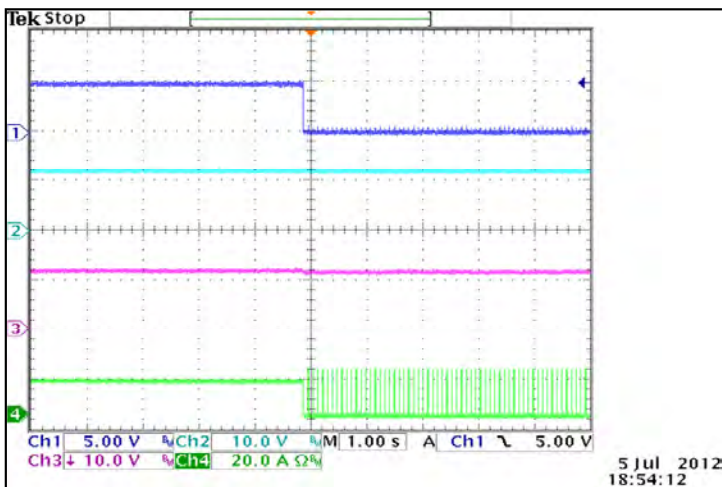




Output Short Circuit Characteristic V2

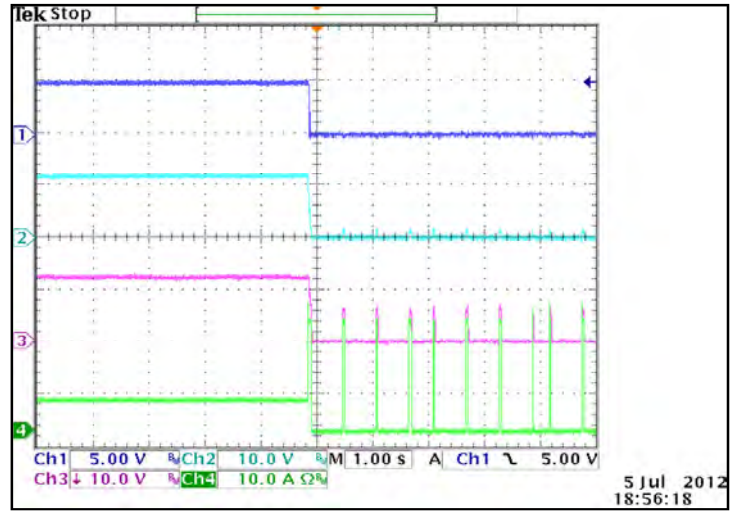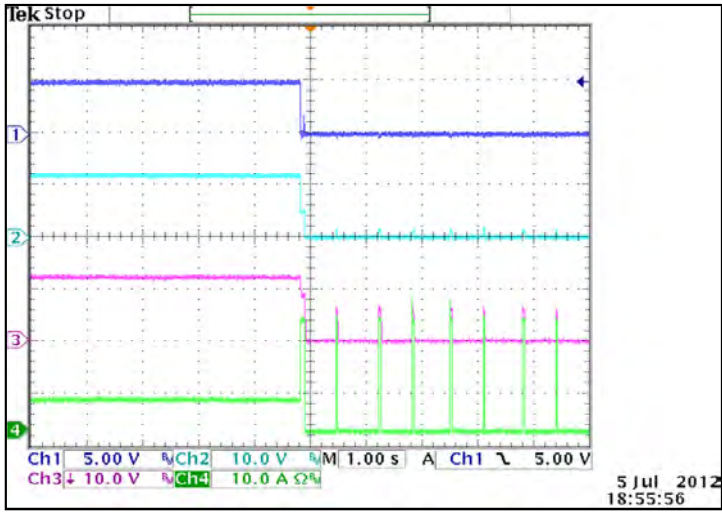



Output Short Circuit Characteristic V3

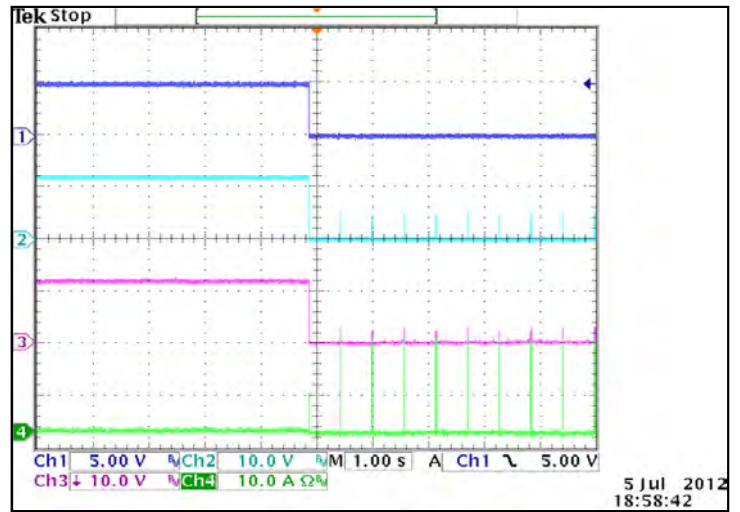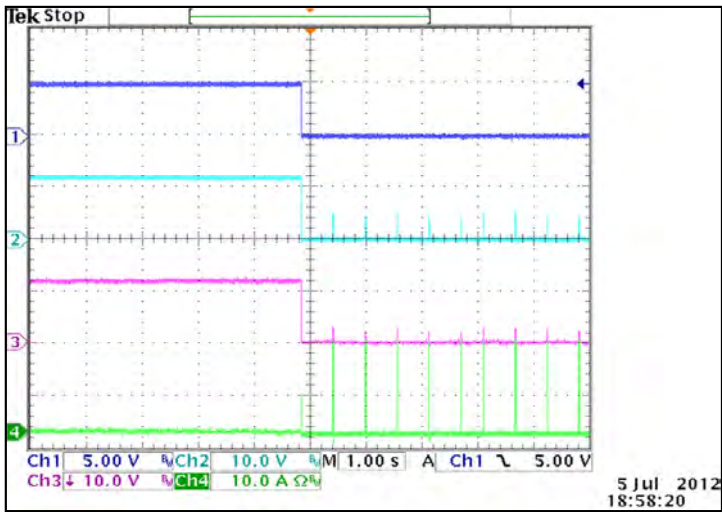





Output Overvoltage Characteristic V1

Supply shall protect itself against over voltage conditions. The Power Supply shall latch and require AC input recycle to reset.

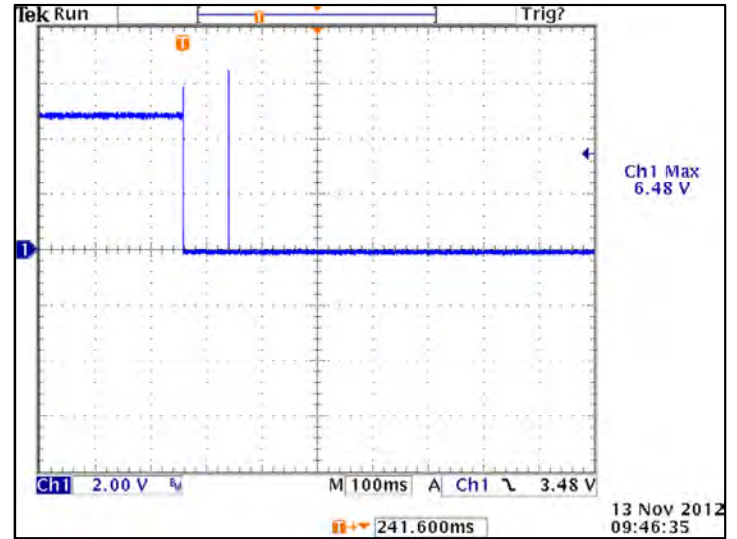
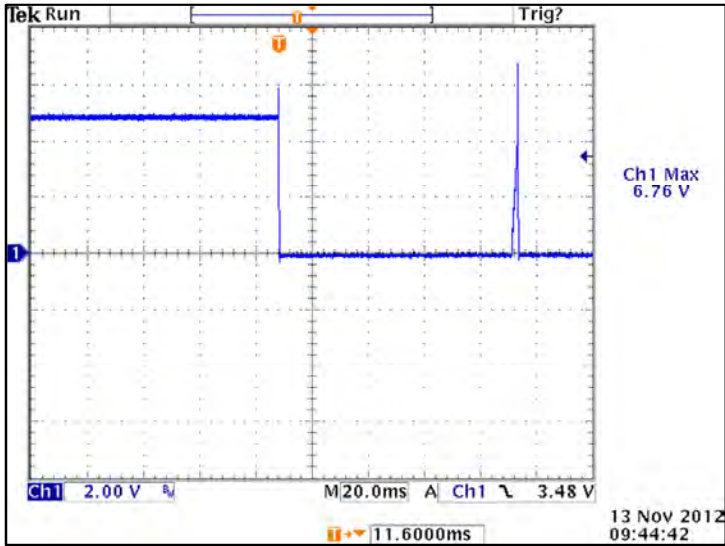


Output Overvoltage Characteristic V2

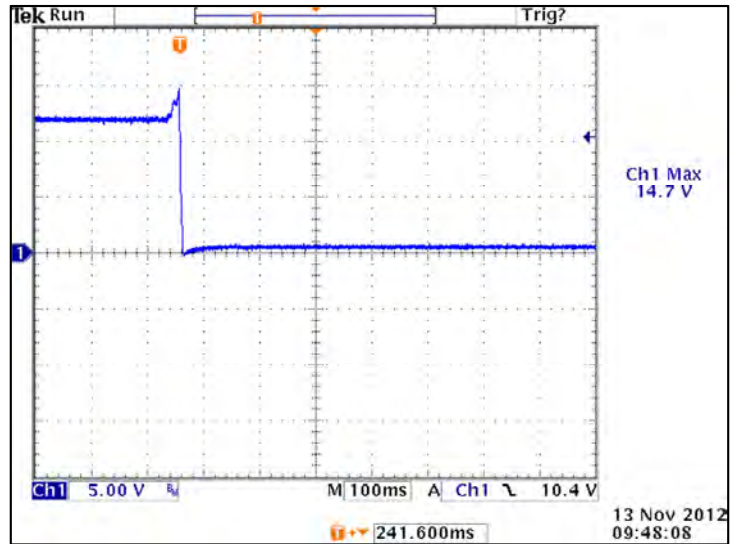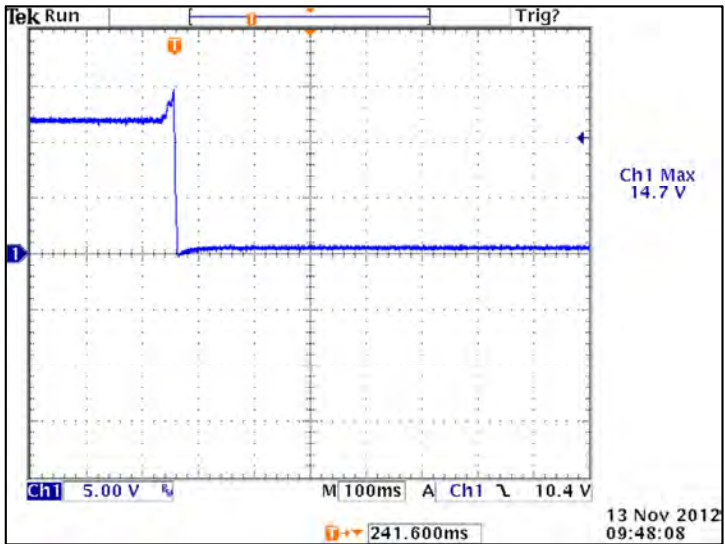



Output Overvoltage Characteristic V3

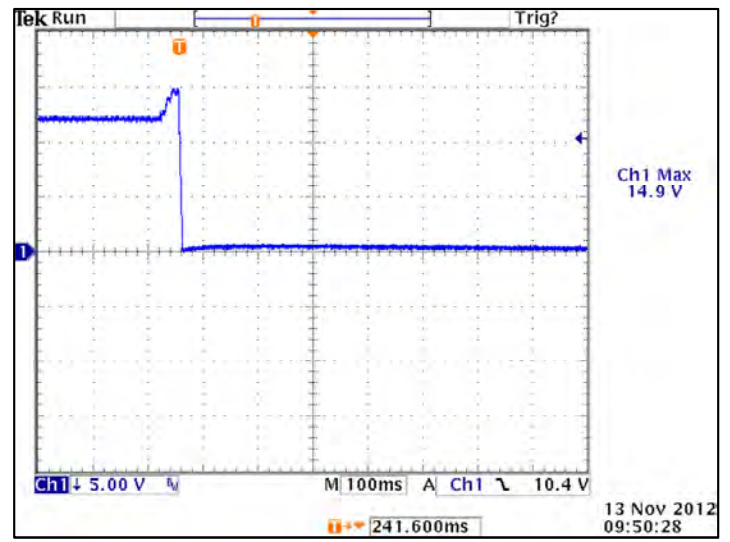
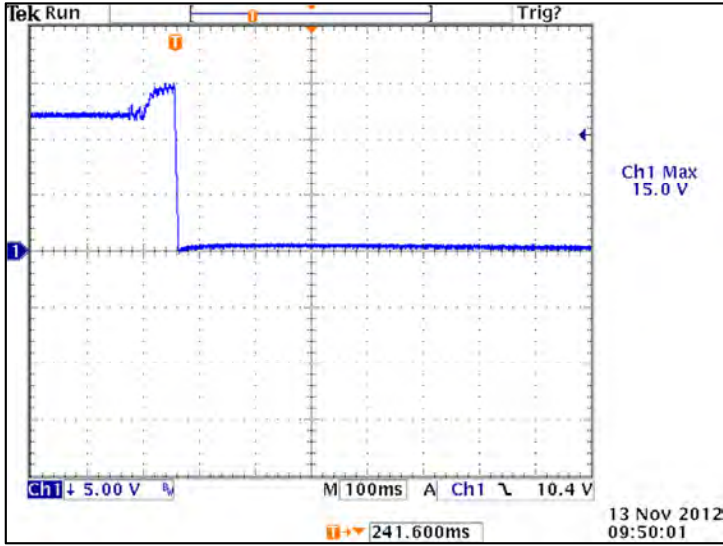


Startup Time

Start up time is <2 seconds.

Hold-up Time

Hold up time is 16mS minimum.

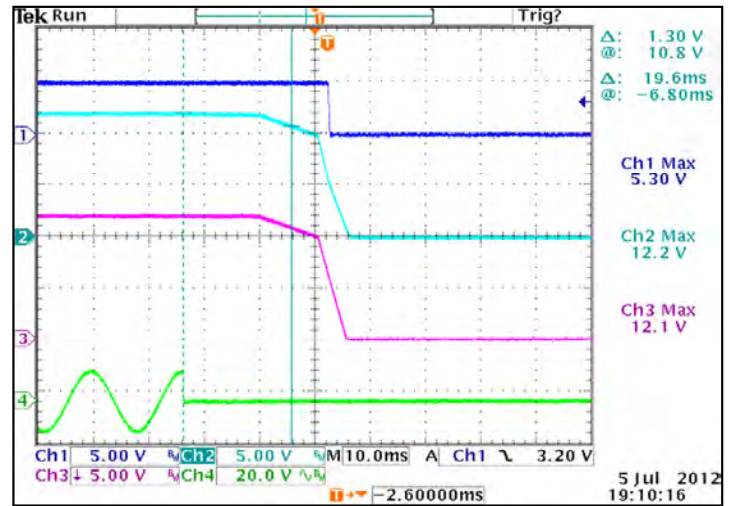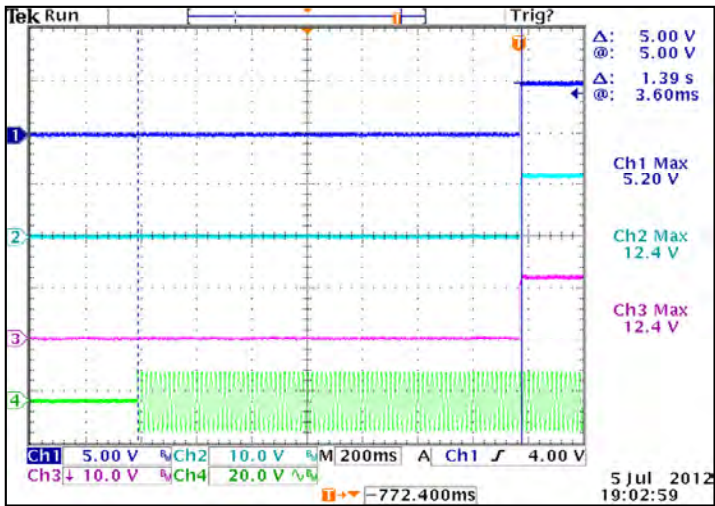



Power Fail Signal Timing

Active Low TTL logic signal goes high 100mS–500mS after main output; it goes low at least 6mS before loss of regulation.

