

# APA1606SECK

1.6 x 0.6 mm Right Angle SMD Chip LED Lamp

# **DESCRIPTIONS**

- The Super Bright Orange device is made with AlGaInP (on GaAs substrate) light emitting diode chip
- · Electrostatic discharge and power surge could damage the LEDs
- . It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs
- · All devices, equipments and machineries must be electrically grounded

## **FEATURES**

- 1.6 x 1.2 x 0.6 mm right angle SMD LED, 0.6 mm thickness
- · Low power consumption
- · Wide viewing angle
- · Ideal for backlight and indicator
- Package: 2000 pcs / reel
- Moisture sensitivity level: 3
- · Tinned pads for improved solderability
- Halogen-free
- RoHS compliant

# **APPLICATIONS**


- Backlight
- · Status indicator
- · Home and smart appliances
- · Wearable and portable devices
- Healthcare applications

# **ATTENTION**

Observe precautions for handling electrostatic discharge sensitive devices




## **PACKAGE DIMENSIONS**

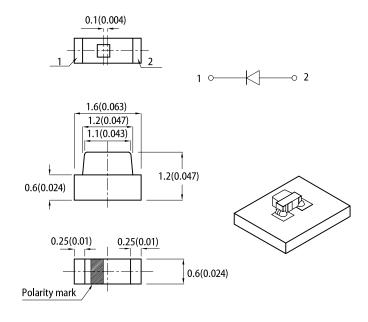

## RECOMMENDED SOLDERING PATTERN

(units: mm; tolerance: ± 0.1)



- 1. All dimensions are in millimeters (inches).
- Tolerance is ±0.1(0.004") unless otherwise noted.
   The specifications, characteristics and technical data described in the datasheet are subject to
- change without prior notice.

  4. The device has a single mounting surface. The device must be mounted according to the specifications.

  5. For right angle SMD LEDs, the solder stencil should be at least 5mil in thickness, to prevent poor solder wetting
- due to insufficient solder paste.

## **SELECTION GUIDE**

Part Number	Emitting Color (Material)	Lens Type	Iv (mcd) @ 20mA [2]		Viewing Angle [1]	
			Min.	Тур.	201/2	
APA1606SECK	Super Bright Orange (AlGaInP)	Water Clear	110	250	4400	
			*80	*180	110°	

1. 91/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value 2. Luminous intensity / luminous flux: +/-15%.

Luminous intensity value is traceable to CIE127-2007 standards.



# ELECTRICAL / OPTICAL CHARACTERISTICS at T<sub>A</sub>=25°C

Parameter.	Symbol	Funithing Colon	Value		1124
Parameter		Emitting Color	Тур.	Max.	Unit
Wavelength at Peak Emission I <sub>F</sub> = 20mA	$\lambda_{peak}$	Super Bright Orange	610	-	nm
Dominant Wavelength I <sub>F</sub> = 20mA	λ <sub>dom</sub> <sup>[1]</sup>	Super Bright Orange	605	-	nm
Spectral Bandwidth at 50% $\Phi$ REL MAX I <sub>F</sub> = 20mA	Δλ	Super Bright Orange	29	-	nm
Capacitance	С	Super Bright Orange	15	-	pF
Forward Voltage I <sub>F</sub> = 20mA	V <sub>F</sub> <sup>[2]</sup>	Super Bright Orange	2.1	2.5	V
Reverse Current (V <sub>R</sub> = 5V)	I <sub>R</sub>	Super Bright Orange	-	10	μA
Temperature Coefficient of $\lambda_{peak}$ $I_F$ = 20mA, -10°C $\leq$ T $\leq$ 85°C	$TC_{\lambda peak}$	Super Bright Orange	0.13	-	nm/°C
Temperature Coefficient of $\lambda_{dom}$ I <sub>F</sub> = 20mA, -10°C $\leq$ T $\leq$ 85°C	$TC_{\lambdadom}$	Super Bright Orange	0.06	-	nm/°C
Temperature Coefficient of $V_F$ I <sub>F</sub> = 20mA, -10°C $\leq$ T $\leq$ 85°C	TC <sub>V</sub>	Super Bright Orange	-1.9	-	mV/°C

# ABSOLUTE MAXIMUM RATINGS at T<sub>A</sub>=25°C

Parameter	Symbol	Value	Unit
Power Dissipation	P <sub>D</sub>	75	mW
Reverse Voltage	V <sub>R</sub>	5	V
Junction Temperature	T <sub>j</sub>	115	°C
Operating Temperature	T <sub>op</sub>	-40 to +85	°C
Storage Temperature	T <sub>stg</sub>	-40 to +85	°C
DC Forward Current	I <sub>F</sub>	30	mA
Peak Forward Current	I <sub>FM</sub> <sup>[1]</sup>	195	mA
Electrostatic Discharge Threshold (HBM)	-	3000	V
Thermal Resistance (Junction / Ambient)	R <sub>th JA</sub> [2]	770	°C/W
Thermal Resistance (Junction / Solder point)	R <sub>th JS</sub> <sup>[2]</sup>	600	°C/W

Notes:
1. 1/10 Duty Cycle, 0.1 ms Pulse Width.
2.  $R_{\text{th},M}$ ,  $R_{\text{th},S}$  Results from mounting on PC board FR4 (pad size  $\geq$  16 mm<sup>2</sup> per pad).
3. Relative humidity levels maintained between 40% and 60% in production area are recommended to avoid the build-up of static electricity – Ref JEDEC/JESD625-A and JEDEC/J-STD-033.




The dominant wavelength (λd) above is the setup value of the sorting machine. (Tolerance λd:±1nm.)
 Forward voltage:±0.1V.
 Wavelength value is traceable to CIE127-2007 standards.
 Excess driving current and / or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.




# **TECHNICAL DATA**


## **RELATIVE INTENSITY vs. WAVELENGTH**





### **SPATIAL DISTRIBUTION**




## **SUPER BRIGHT ORANGE**










# **REFLOW SOLDERING PROFILE for LEAD-FREE SMD PROCESS**

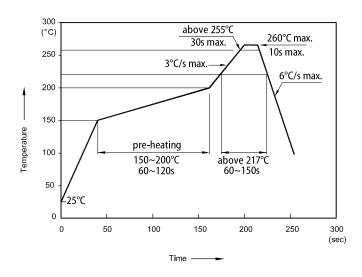


### Notes

- 1. Don't cause stress to the LEDs while it is exposed to high temperature.


  2. The maximum number of reflow soldering passes is 2 times.

  3. Reflow soldering is recommended. Other soldering methods are not recommended as they might cause damage to the product.

## TAPE SPECIFICATIONS (units: mm)





# **REEL DIMENSION** (units: mm)





## **PACKING & LABEL SPECIFICATIONS**





### **PRECAUTIONARY NOTES**

- 1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to
  the latest datasheet for the updated specifications.
   When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If
- When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
- 4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
- 5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright
- 6. All design applications should refer to Kingbright application notes available at https://www.KingbrightUSA.com/ApplicationNotes

