



P-DUKE POWER


LCD20 Series

DC-DC Converter
Up to 20 Watts

3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

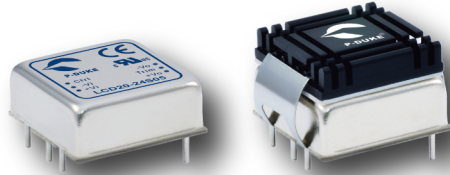

Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

UL US CB CE

1600
VDC
Isolation
Voltage

2 : 1
Input
Range

6
sided
Shielding

Internal
EN55032
Class
Filter **A**

LOW
Standby
Power

NO
Min. Load
Required

REMOTE
ON
OFF

OCP

OVP

SCP

UVP

PART NUMBER STRUCTURE

LCD20 -	48	S	05	-	M3	A	HC
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)		Operating Temp. Options	Remote ON/OFF & Trim Options	Assembly Options
	12:9~18 24:18~36 48:36~75	S:Single D:Dual	3P3:3.3 05:5 12:12 15:15 24:24 12:±12 15:±15 24:±24		□: Standard -40~+101°C With derating M3: M3 Version -55~+101°C With derating	□:Negative logic A:Positive logic B:Without Ctrl pin C:Negative logic without Trim pin D:Without Ctrl & Trim pin E:Positive logic without Trim pin	□: None HC: Heat-sink with Clamp

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
LCD20-12S3P3	9 ~ 18	3.3	4500	10	89	7000
LCD20-12S05	9 ~ 18	5	4000	10	89	5000
LCD20-12S12	9 ~ 18	12	1670	10	89	850
LCD20-12S15	9 ~ 18	15	1330	10	89	700
LCD20-12S24	9 ~ 18	24	833	12	90	220
LCD20-12D12	9 ~ 18	±12	±833	10	89	±500
LCD20-12D15	9 ~ 18	±15	±667	10	90	±350
LCD20-12D24	9 ~ 18	±24	±417	14	90	±100
LCD20-24S3P3	18 ~ 36	3.3	4500	10	90	7000
LCD20-24S05	18 ~ 36	5	4000	10	91	5000
LCD20-24S12	18 ~ 36	12	1670	6	90	850
LCD20-24S15	18 ~ 36	15	1330	6	91	700
LCD20-24S24	18 ~ 36	24	833	10	92	220
LCD20-24D12	18 ~ 36	±12	±833	6	90	±500
LCD20-24D15	18 ~ 36	±15	±667	6	90	±350
LCD20-24D24	18 ~ 36	±24	±417	12	91	±100
LCD20-48S3P3	36 ~ 75	3.3	4500	10	90	7000
LCD20-48S05	36 ~ 75	5	4000	10	90	5000
LCD20-48S12	36 ~ 75	12	1670	4	90	850
LCD20-48S15	36 ~ 75	15	1330	4	90	700
LCD20-48S24	36 ~ 75	24	833	8	91	220
LCD20-48D12	36 ~ 75	±12	±833	4	89	±500
LCD20-48D15	36 ~ 75	±15	±667	4	90	±350
LCD20-48D24	36 ~ 75	±24	±417	10	91	±100

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	12Vin(nom)	9	12	18	VDC
	24Vin(nom)	18	24	36	
	48Vin(nom)	36	48	75	
Start up voltage	12Vin(nom)			9	VDC
	24Vin(nom)			18	
	48Vin(nom)			36	
Shutdown voltage	12Vin(nom)	7.5	8	8.8	VDC
	24Vin(nom)	15.5	16	17.5	
	48Vin(nom)	32.5	33	35.5	
Start up time	Constant resistive load	Power up		30	ms
		Remote ON/OFF		30	
Input surge voltage	1 second, max.	12Vin(nom)		25	VDC
		24Vin(nom)		50	
		48Vin(nom)		100	
Input filter				Pi type	
Remote ON/OFF	Referred to -Vin pin	Positive logic (Option)	DC-DC ON	Open or 3 ~ 15VDC	
		Negative logic (Standard)	DC-DC OFF	Short or 0 ~ 1.2VDC	
			DC-DC ON	Short or 0 ~ 1.2VDC	
			DC-DC OFF	Open or 3 ~ 15VDC	
		Input current of Ctrl pin	-0.5	1.0	mA
		Remote off input current		2.0	mA

OUTPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	Single	-0.2		+0.2	%
		Dual	-0.5		+0.5	
Load regulation	No Load to Full Load	Single	-0.2		+0.2	%
		Dual	-1.0		+1.0	
	10% Load to 90%Load	Single	-0.1		+0.1	
		Dual	-0.8		+0.8	
Cross regulation	Asymmetrical load 25%/100% FL	Dual	-5.0		+5.0	%
Voltage adjustability	Single output	24Vout	-10		+20	%
		Others	-10		+10	
Ripple and noise	Measured by 20MHz bandwidth					
	With a 1 μ F M/C X7R and a 10 μ F T/C	Single				
		3.3Vout, 5Vout		75		
	With 2 pcs of 6.8 μ F/50V X7R MLCC	12Vout, 15Vout		75		
		24Vout		75		mVp-p
	With a 1 μ F M/C X7R and a 10 μ F T/C for each output	Dual			100	
12Vout, 15Vout				100		
With a 4.7 μ F/50V X7R MLCC for each output	24Vout			100		
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			250		μ s
Over voltage protection		3.3Vout	3.7		5.4	VDC
		5Vout	5.6		7.0	
		12Vout	13.5		19.6	
		15Vout	16.8		20.5	
		24Vout	29.1		32.5	
Over load protection	% of Iout rated; Hiccup mode			150		%
Short circuit protection			Continuous, automatic recovery			

GENERAL SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	1600			VDC
		Input(Output) to Case	1000			
Isolation resistance	500VDC		1			G Ω
Isolation capacitance					1500	pF
Switching frequency		3.3Vout, 5Vout	248	275	303	kHz
		Others	297	330	363	
Safety approvals	IEC /EN /UL 62368-1				UL:E193009 CB:UL(Demko)	
Case material			Nickel-coated copper			
Base material			FR4 PCB			
Potting material			Silicone (UL94 V-0)			
Weight			15g (0.53oz)			
MTBF	MIL-HDBK-217F, Full load		1.477 x 10 ⁶ hrs			


ENVIRONMENTAL SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating ambient temperature	Standard M3 Version	With derating	-40		+101	°C
		With derating	-55		+101	
Maximum case temperature					105	°C
Storage temperature range			-55		+125	°C
Thermal impedance	Without heat-sink			17.6		°C/W
	With heat-sink			14.8		
Thermal shock			MIL-STD-810F			
Vibration			MIL-STD-810F			
Relative humidity			5% to 95% RH			

EMC SPECIFICATIONS


Parameter	Conditions		Level
EMI	EN55032	Without external components	Class A
		With external components	Class B
EMS	EN55024		
ESD	EN61000-4-2	Air ± 8 kV and Contact ± 6 kV	Perf. Criteria A
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4	± 2 kV	Perf. Criteria A
		With an external input filter capacitor (Nippon chemi-con KY series, 220 μ F/100V)	
Surge	EN61000-4-5	± 2 kV	Perf. Criteria A
		With an external input filter capacitor (Nippon chemi-con KY series, 220 μ F/100V)	
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

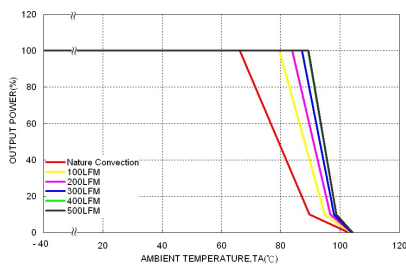


LCD20-48S05 Derating Curve

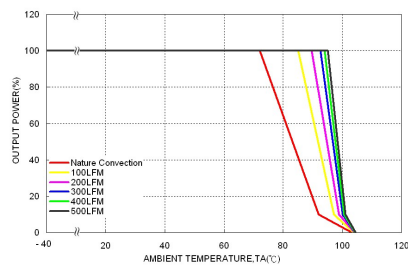

LCD20-48S05 Derating Curve With Heat-sink

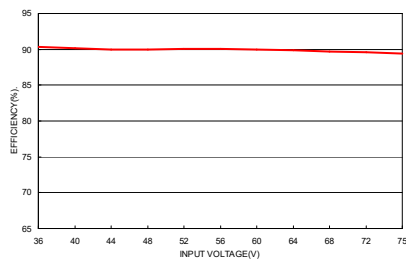

LCD20-48S05 Efficiency vs. Input Voltage

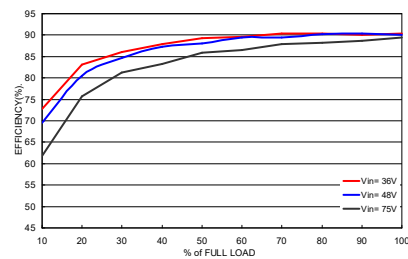

LCD20-48S05 Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
LCD20-12S□□、LCD20-12D□□	4	Slow-Blow
LCD20-24S□□、LCD20-24D□□	2	Slow-Blow
LCD20-48S□□、LCD20-48D□□	1.25	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

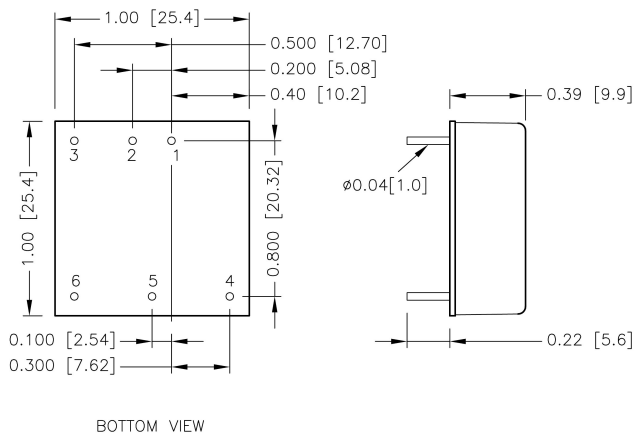


PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	Trim	Common
6	-Vout	-Vout

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin pitch tolerance ±0.01 [0.25]
4. Pin dimension tolerance ±0.004[0.10]

HEAT-SINK OPTIONS


-HC (Heat-sink with clamps)

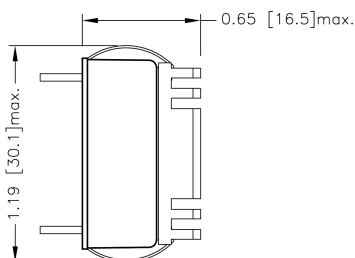


* All dimensions in inch [mm]

RECOMMENDED PAD LAYOUT

Standard

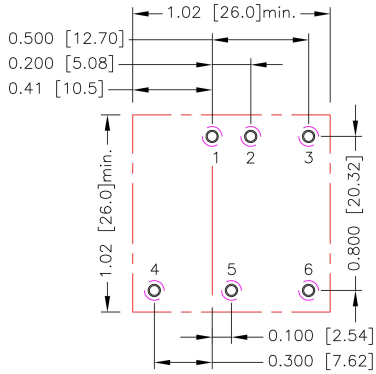

-HC

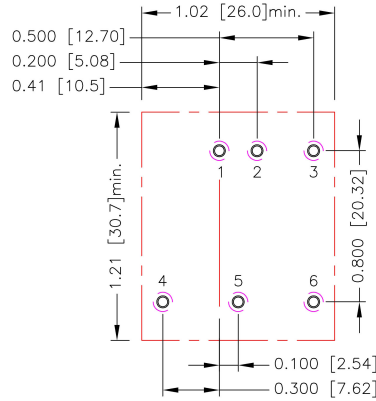


All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.4.5.6: $\Phi 0.051[1.30]$
 Top view pad 1.2.3.4.5.6: $\Phi 0.064[1.63]$
 Bottom view pad 1.2.3.4.5.6: $\Phi 0.102[2.60]$

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding Environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

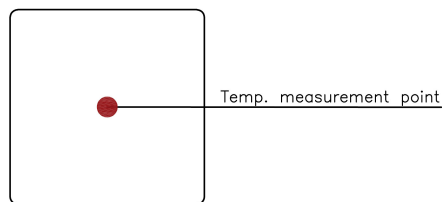

TOP VIEW

OUTPUT VOLTAGE ADJUSTMENT

Output voltage set point adjustment allows the user to increase or decrease the output voltage set point of the module. This is accomplished by connecting an external resistor between the Trim pin and either the +Output or -Output pins. With an external resistor between the Trim and -Output pin, the output voltage set point increases. With an external resistor between the Trim and +Output pin, the output voltage set point decreases. The external Trim resistor needs to be at least 1/16W of rated power.

Trim Up Equation

$$R_U = \left[\frac{G \times L}{(V_{o,up} - L - K)} - H \right] \Omega$$

Trim Down Equation

$$R_D = \left[\frac{(V_{o,down} - L) \times G}{(V_o - V_{o,down})} - H \right] \Omega$$


Trim constants

Module	G	H	K	L
LCD20-□□S3P3	5110	2050	0.8	2.5
LCD20-□□S05	5110	2050	2.5	2.5
LCD20-□□S12	10000	5110	9.5	2.5
LCD20-□□S15	10000	5110	12.5	2.5
LCD20-□□S24	56000	13000	21.5	2.5

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



□□S3P3

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
RU (kΩ)	385.071	191.511	126.990	94.730	75.374	62.470	53.253	46.340	40.963	36.662

□□S05

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500
RU (kΩ)	253.450	125.700	83.117	61.825	49.050	40.533	34.450	29.888	26.339	23.500

□□S12

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200
RU (kΩ)	203.223	99.057	64.334	46.973	36.557	29.612	24.652	20.932	18.038	15.723

□□S15


ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500
RU (kΩ)	161.557	78.223	50.446	36.557	28.223	22.668	18.700	15.723	13.409	11.557

□□S24

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	24.240	24.480	24.720	24.960	25.200	25.440	25.680	25.920	26.160	26.400
RU (kΩ)	570.333	278.667	181.444	132.833	103.667	84.222	70.333	59.917	51.815	45.333
ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	26.640	26.880	27.120	27.360	27.600	27.840	28.080	28.320	28.560	28.800
RU (kΩ)	40.030	35.611	31.872	28.667	25.889	23.458	21.314	19.407	17.702	16.167

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down



□□S3P3

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.970
RD (k Ω)	116.719	54.779	34.133	23.810	17.616	13.486	10.537	8.325	6.604	5.228

□□S05

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500
RD (k Ω)	248.340	120.590	78.007	56.715	43.940	35.423	29.340	24.778	21.229	18.390

□□S12

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800
RD (k Ω)	776.557	380.723	248.779	182.807	143.223	116.834	97.985	83.848	72.853	64.057

□□S15

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500
RD (k Ω)	818.223	401.557	262.668	193.223	151.557	123.779	103.938	89.057	77.483	68.223

□□S24

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	23.760	23.520	23.280	23.040	22.800	22.560	22.320	22.080	21.840	21.600
RD (k Ω)	4947.667	2439.333	1603.222	1185.167	934.333	767.111	647.667	558.083	488.407	432.667