

### 0.75T8A 1.5RP series

0.75W - Single Output DC-DC Converter - Fixed Input - Isolated & Regulated



### **DC-DC Converter**

0.75 Watt



**(+** Compact SMD package

High efficiency up to 74%

1500VDC isolation

Temperature range: -40°C ~ +85°C

1 Industry standard pinout



Internal SMD construction
Meets UL62368, EN62368

Meets UL62368, EN62368 standards

RoHS compliance


Short circuit protection (SCP)

The 0.75T8A\_1.5RP series is specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation  $\leq \pm 10\%$ )
- 2) Where isolation is necessary between input and output (isolation voltage ≤1500VDC)
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding

Such as: digit circuit condition; normal low-frequency artificial circuit condition; relay drive circuit condition, etc.

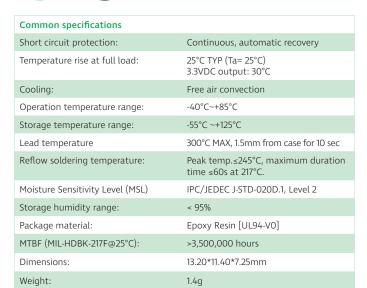

Input specifications					
Item	Test condition	Min	Тур	Max	Units
Input current (full load / no load)	5VDC input • 3.3/5VDC output • 9/12VDC output • 15VDC output		221/5 208/12 202/18	234/10 221/20 215/30	mA mA mA
Reflected ripple current*			15		mA
Input filter	Filter capacitor				
Hot plug	Unavailable				

 ${}^{\star}$  Reflected ripple current testing method please see DC-DC Converter Application Notes for specific operation.

Isolation specifications						
Item	Test condition	Min	Тур	Max	Units	
Isolation voltage	Tested for 1 minute and 1mA max	1500			VDC	
Isolation resistance	Test at 500VDC	1000			ΜΩ	
Isolation capacitance	Input/Output 100KHz/1V		20		pF	

Output specifications						
Item	Test condition Min Typ		Тур	Max	Units	
Output voltage accuracy				±3	%	
Line regulation	For Vin change of 1%			±0.25	%	
Load regulation	10% to 100% load • 3.3V output • other output		3 2		% %	
Temperature drift	100% full load			±0.03	%/°C	
Ripple & Noise*	20MHz Bandwidth 30		30	75	mVp-p	
Switching frequency	Full load, nominal input		270		KHz	

Ripple and noise tested with "parallel cable" method. See detailed operation instructions at DC-DC Application Notes.

EMC sp	ecifications	
EMI	CE	CISPR22/EN55032 CLASS B (External Circuit Refer to EMC recommended circuit)
EMI	RE	CISPR22/EN55032 CLASS B (External Circuit Refer to EMC recommended circuit)
EMS	ESD	IEC/EN61000-4-2 Contact ±6KV perf. Criteria B

#### Example

#### 0.75T8A 0505S1.5RP

0.75 = 0.75Watt; T8 = SMT8; A = Pinning; 5Vin; 5Vout; S = Single output; 1.5 = 1.5kVDC; R= Regulated output; P = Short circuit protection

#### Note:


- Operation under minimum load will not damage the converter; However, they
  may not meet all specification listed.
- 2. Max. Capacitive Load tested at input voltage range and full load.
- All specifications measured at Ta = 25°C, humidity <75%, nominal input voltage and rated output load unless otherwise specified.
- In this datasheet, all the test methods of indications are based on our corporate standards.

#### 0.75T8A 1.5RP series


0.75W - Single Output DC-DC Converter - Fixed Input - Isolated & Regulated


Part Number	Input Voltage [V]	Output Voltage [VDC]	Output Current [mA]	Capacitive load [μF, Max.]	Efficiency [%, max]	Certification
0.75T8A_0503S1.5RP	5	3.3	200	2400	68	UL/CE
0.75T8A_0505S1.5RP	5	5	150	2400	72	UL/CE
0.75T8A_0509S1.5RP	5	9	83	1000	72	UL/CE
0.75T8A_0512S1.5RP	5	12	62	560	73	UL/CE
0.75T8A_0515S1.5RP	5	15	50	560	74	UL/CE

## **Typical characteristics**



## Typical characteristics





# Typical application circuit

Table 1.

If it is required to further reduce input and output ripple, a filter capacitor can be connected to the input and output terminals, see Fig.1. Moreover, choosing suitable filter capacitor is very important , start-up problems may be caused by too large capacitance. To ensure the modules running well, the recommended capacitive load values as shown in


Vin ○ <del>•</del>			• +Vo
Cin ∓	DC	DC	Cout =
GND O-			• 0 NV

Figure 1

Vin (VDC)	Cin (μF)	Vout (VDC)	Cout (µF)
5	4.7	3.3/5	10
5	4.7	9/12	2.2
5	4.7	15	1


Table 1

## EMC typical recommended circuit



	Output voltage (VDC)		3.3/5/9	12/15	
	EMI	C1/C2	4.7μF/25V		
Input voltage 5VDC	EMI	CY	-	1nF/2KVDC HEC C1206X102K202T JOHANSON 202R18W102KV4E	
	EMI	СЗ	Refer to the Cout in table 1		
	EMI	LDM	6.8µH		

# **Mechanical dimensions**



Note:


Unit: mm[inch]

Pin section tolerances: ±0.10[±0.004] General tolerances: ±0.25[±0.010]

## THIRD ANGLE PROJECTION







Note: Grid 2.54\*2.54mm

Pin-	Pin-Out				
Pin	Function				
1	GND				
2	Vin				
4	0V				
5	+Vo				
8	NC				

NC: Pin to be isolated from circuitry