## 3RA2210-1HA15-2AP0

**Data sheet** 



Load feeder fuseless, Reversing duty 400 V AC, Size S00 5.50...8.00 A 230 V AC screw terminal for installation on standard mounting rail Type of coordination 1, lq = 150 kA 1 NC (contactor)

product brand name	SIRIUS
product designation	Reversing starter
design of the product	for standard rail or screw mounting
product type designation	3RA22
manufacturer's article number	
<ul> <li>of the supplied contactor</li> </ul>	3RT2015-1AP02
<ul> <li>of the supplied circuit-breakers</li> </ul>	3RV2011-1HA10
<ul> <li>of the supplied link module</li> </ul>	3RA1921-1DA00
General technical data	
size of the circuit-breaker	S00
size of load feeder	S00
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
degree of protection NEMA rating	other
shock resistance according to IEC 60068-2-27	6g / 11 ms
mechanical service life (switching cycles) of contactor typical	30 000 000
type of assignment	1
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
<ul> <li>during storage</li> </ul>	-50 +80 °C
during transport	-50 +80 °C
temperature compensation	-20 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current-dependent overload release	5.5 8 A
operating voltage	
rated value	690 V
at AC-3 rated value maximum	690 V
operating frequency rated value	50 60 Hz

operational current at AC-3 at 400 V rated value	6.5 A	
operating power at AC-3		
<ul> <li>at 400 V rated value</li> </ul>	3 000 W	
Control circuit/ Control		
type of voltage of the control supply voltage	AC	
control supply voltage at AC		
at 50 Hz rated value	230 V	
at 50 Hz rated value	230 230 V	
at 60 Hz rated value	230 V	
at 60 Hz rated value	230 230 V	
apparent holding power of magnet coil at AC	4.2 VA	
Auxiliary circuit		
product extension auxiliary switch	Yes	
Protective and monitoring functions		
trip class	CLASS 10	
design of the overload release	thermal (bimetallic)	
UL/CSA ratings		
full-load current (FLA) for 3-phase AC motor		
• at 480 V rated value	8 A	
yielded mechanical performance [hp]		
• for 3-phase AC motor		
— at 220/230 V rated value	2 hp	
— at 460/480 V rated value	5 hp	
— at 575/600 V rated value	5 hp	
Short-circuit protection		
product function short circuit protection	Yes	
design of the short-circuit trip	magnetic	
conditional short-circuit current (Iq)		
at 400 V according to IEC 60947-4-1 rated value	150 000 A	
Installation/ mounting/ dimensions		
installation/ mounting/ unitensions		
mounting position	vertical	
, in the second	vertical screw and snap-on mounting onto 35 mm standard mounting rail	
mounting position	1.11	
mounting position fastening method	screw and snap-on mounting onto 35 mm standard mounting rail	
mounting position fastening method height	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm	
mounting position fastening method height width	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm	
mounting position fastening method height width depth	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm	
mounting position fastening method height width depth required spacing	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm	
mounting position  fastening method  height  width  depth  required spacing  • for grounded parts	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm	
mounting position fastening method height width depth required spacing • for grounded parts — forwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm	
mounting position fastening method height width depth required spacing  • for grounded parts — forwards — backwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm 32 mm 0 mm	
mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm 32 mm 0 mm 50 mm	
mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm 32 mm 0 mm 50 mm	
mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side — downwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm 32 mm 0 mm 50 mm	
mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 50 mm 10 mm	
mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm	
mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 10 mm	
mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — upwards  - upwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 50 mm	
mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — upwards  - downwards  • for lowe parts  — forwards  — backwards  — backwards  — upwards  — backwards  — upwards  — downwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 50 mm 10 mm	
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — at the side — downwards — torwards — backwards — backwards — backwards — at the side Connections/ Terminals	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 50 mm 10 mm	
mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — backwards  — upwards  — at the side  — downwards  — torwards  — torwards  — torwards  — backwards  — backwards  — at the side  — downwards  — at the side	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 50 mm 10 mm 10 mm 10 mm	
mounting position  fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — at the side  Connections/ Terminals  type of electrical connection • for main current circuit	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 50 mm 10 mm 50 mm 10 mm 50 mm	
mounting position  fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards • for live parts — forwards — backwards — upwards — at the side Connections/ Terminals  type of electrical connection • for main current circuit • for auxiliary and control circuit	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 50 mm 10 mm 10 mm 10 mm	
mounting position fastening method height width depth required spacing	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 10 mm 50 mm 50 mm 50 mm 50 mm	
mounting position  fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — torwards — backwards — upwards — torwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit  Safety related data  B10 value with high demand rate according to SN 31920	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 50 mm 10 mm 10 mm 50 mm 10 mm 50 mm 10 mm 50 mm	
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — a the side Connections/ Terminals  type of electrical connection • for main current circuit • for auxiliary and control circuit  Safety related data  B10 value with high demand rate according to SN 31920 proportion of dangerous failures	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 10 mm	
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — a the side — downwards — to forwards — backwards — upwards — backwards — upwards — at the side  Connections/ Terminals  type of electrical connection • for main current circuit • for auxiliary and control circuit  Safety related data  B10 value with high demand rate according to SN 31920  proportion of dangerous failures • with high demand rate according to SN 31920	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 10 mm	
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — a the side — downwards — obackwards — upwards — backwards — upwards — the side  Connections/ Terminals  type of electrical connection • for main current circuit • for auxiliary and control circuit  Safety related data  B10 value with high demand rate according to SN 31920 proportion of dangerous failures • with high demand rate according to IEC 60529	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 10 mm	
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — backwards — upwards — towards — odwnwards — at the side  Connections/ Terminals  type of electrical connection • for main current circuit • for auxiliary and control circuit  Safety related data  B10 value with high demand rate according to SN 31920  proportion of dangerous failures • with high demand rate according to SN 31920	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97 mm  32 mm 0 mm 10 mm	

<ul> <li>PROFINET IO protocol</li> </ul>	No
<ul> <li>PROFIsafe protocol</li> </ul>	No
protocol is supported AS-Interface protocol	No

Certificates/ approvals

**General Product Approval** 

For use in hazardous locations Declaration of Conformity



Confirmation









Declaration of Conformity

**Test Certificates** 

Marine / Shipping



Type Test Certificates/Test Report

Special Test Certificate







Marine / Shipping

other Railway









Confirmation

Vibration and Shock

## **Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2210-1HA15-2AP0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2210-1HA15-2AP0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2210-1HA15-2AP0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2210-1HA15-2AP0&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RA2210-1HA15-2AP0/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2210-1HA15-2AP0&objecttype=14&gridview=view1

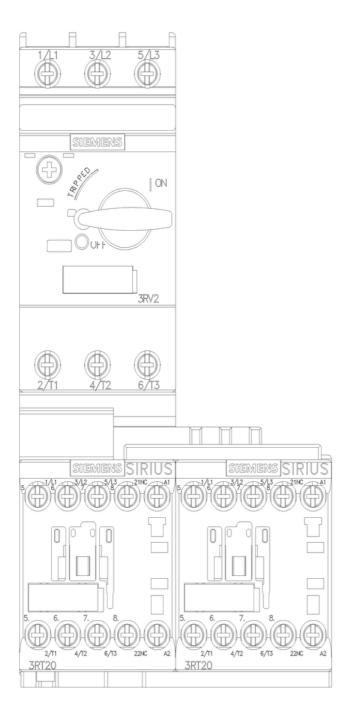

last modified: 2/16/2022 🖸