## 3RA2220-0HD23-0AP6

**Data sheet** 



Fuseless motor starter Reversing operation 600VAC Size S0 0.55-0.8A 220/240VAC 50/60HZ screw connection For snapping onto 60 mm busbar systems Type of coordination 2 IQ = 150 KA Also full fills type Of coordination 1 1NO+1NC (per contactor)

product brand name	SIRIUS				
product designation	non-fused motor starter 3RA2				
design of the product	reversing starter				
manufacturer's article number					
<ul> <li>of the supplied contactor</li> </ul>	3RT2023-1AP60				
<ul> <li>of the supplied circuit-breakers</li> </ul>	3RV2011-0HA10				
<ul> <li>of the supplied RS assembly kit</li> </ul>	3RA2923-1DB1				
<ul> <li>of the supplied busbar adapter</li> </ul>	<u>8US1251-5NT10</u>				
<ul> <li>of the supplied link module</li> </ul>	3RA2921-1AA00				
General technical data					
size of the circuit-breaker	S00				
size of load feeder	S0				
product extension auxiliary switch	Yes				
insulation voltage with degree of pollution 3 at AC rated value	690 V				
degree of pollution	3				
surge voltage resistance rated value	6 kV				
shock resistance according to IEC 60068-2-27	6g / 11 ms				
mechanical service life (switching cycles) of contactor typical	10 000 000				
type of assignment	2				
Substance Prohibitance (Date)	03/01/2017				
Ambient conditions					
ambient temperature					
<ul> <li>during operation</li> </ul>	-20 +60 °C				
<ul> <li>during storage</li> </ul>	-50 +80 °C				
<ul> <li>during transport</li> </ul>	-55 +80 °C				
Main circuit					
number of poles for main current circuit	3				
design of the switching contact	electromechanical				
adjustable current response value current of the current-dependent overload release	0.55 0.8 A				
operating voltage					
rated value	690 V				
at AC-3 rated value maximum	690 V				
operating frequency rated value	50 60 Hz				
operational current at AC-3 at 400 V rated value	0.6 A				
operating power at AC-3					
<ul> <li>at 400 V rated value</li> </ul>	180 W				
• at 500 V rated value	250 W				

<ul> <li>at 690 V rated value</li> </ul>		370 V	V			
Control circuit/ Control		010 1	·	_		
control supply voltage at AC						
at 50 Hz rated value		220 V	,			
at 50 Hz rated value  at 50 Hz rated value			. 242 V			
at 60 Hz rated value						
at 60 Hz rated value     at 60 Hz rated value		240 V 192 264 V				
	A.C.	7.2 VA				
apparent holding power of magnet coil at inductive power factor with the holding po		0.28	Α			
coil	ower or the	0.20				
Auxiliary circuit						
number of NC contacts for auxiliary conta	cts	2				
number of NO contacts for auxiliary conta			2			
Protective and monitoring functions						
trip class		CLAS	S 10			
design of the overload release			thermal (bimetallic)			
response value current of instantaneous short	rt-circuit trin		10.4 A			
unit	t-oircuit trip	10.47	`			
Short-circuit protection						
product function short circuit protection		Yes				
design of the short-circuit trip		magn	etic			
conditional short-circuit current (Iq)						
• at 400 V according to IEC 60947-4-1 ra	ated value	153 0	00 A			
Installation/ mounting/ dimensions						
mounting position		vertic	al			
fastening method		for sn	apping onto 60 mm bu	sbar systems		
height		260 n	nm			
width		90 mi	n			
depth		155 mm				
required spacing						
<ul><li>for grounded parts</li></ul>						
— forwards		10 mi	n			
— backwards		0 mm				
— upwards		30 mm				
— at the side		9 mm				
— downwards		10 mm				
<ul> <li>for live parts</li> </ul>						
— forwards		10 mm				
— backwards		0 mm				
— upwards		30 mi	30 mm			
— downwards		10 mi	10 mm			
— at the side		9 mm	9 mm			
Connections/ Terminals						
type of electrical connection for main current	circuit	screw	y-type terminals			
type of connectable conductor cross-sect						
for main contacts stranded		1 1	10 mm², 2x (2.5 6 mm²)			
<ul> <li>at AWG cables for main contacts</li> </ul>			2x (16 12), 2x (14 8)			
connectable conductor cross-section for mair	n contacts		1 6 mm²			
finely stranded with core end processing						
Safety related data						
B10 value with high demand rate according to SN 31920		1 000 000				
proportion of dangerous failures with high demand rate according to SN 31920		73 %				
protection class IP on the front according to IEC 60529		IP20				
touch protection on the front according to	IEC 60529	finger	-safe, for vertical conta	act from the front		
Certificates/ approvals						
General Product Approval	For use in ha		Declaration of Conformity	other		





## **Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2220-0HD23-0AP6

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2220-0HD23-0AP6

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2220-0HD23-0AP6

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2220-0HD23-0AP6&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RA2220-0HD23-0AP6/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2220-0HD23-0AP6&objecttype=14&gridview=view1

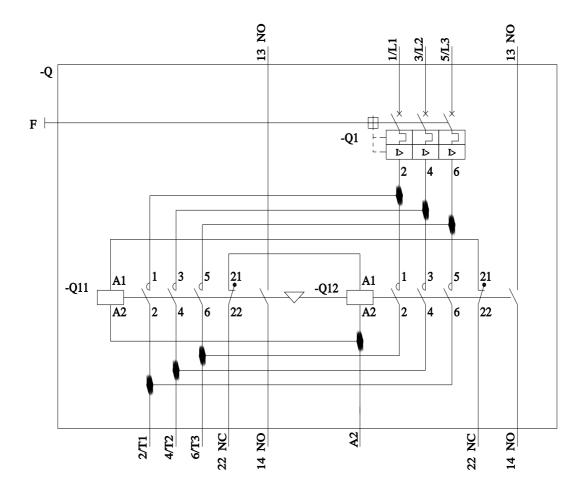

last modified: 12/15/2020 🖸