


## Power Resistors for Mounting Onto a Heatsink Thick Film Technology

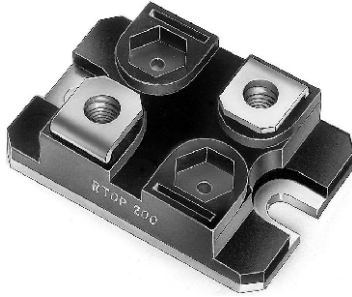

### FEATURES

- 1 % tolerance available
- High power rating = 200 W
- Wide ohmic value range = 0.046  $\Omega$  to 1 M $\Omega$
- Non inductive
- Easy mounting
- Low thermal radiation of the case
- Standard isotope case (SOT-227 B)
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT

### LINKS TO ADDITIONAL RESOURCES



This series of thick film power resistors include modules which can incorporate up to 2 different resistor values in the same SOT-227B package. Two types of terminations are available along with a 4 terminal device for measurement applications in the case of the single resistor version. This product range benefits from Vishay Sfernice's experience in thick film power resistor technology i.e. high power: volume ratio, low tolerance or individual resistors and excellent overload capabilities (due to the trimming technique).

### DIMENSIONS in millimeters

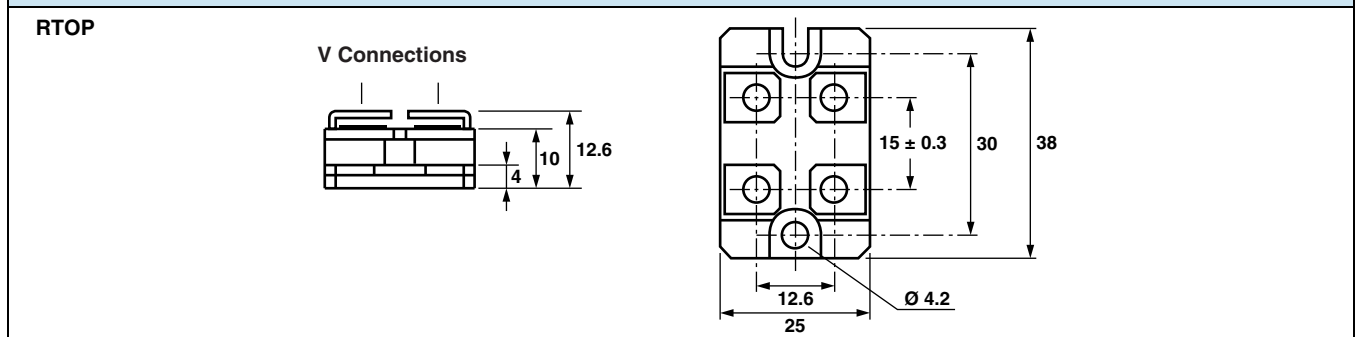

#### Note

- Tolerances unless otherwise specified:  $\pm 0.3$  mm

### STANDARD ELECTRICAL SPECIFICATIONS

| MODEL    | SIZE     | RESISTANCE RANGE $\Omega$ | RATED POWER $P_{25^\circ\text{C}}$ W | TOLERANCE $\pm \%$ | TEMPERATURE COEFFICIENT $\pm$ ppm/ $^\circ\text{C}$ |
|----------|----------|---------------------------|--------------------------------------|--------------------|---|
| DRTOP50  | SOT-227B | 0.091 to 1M               | 50                                   | 1, 2, 5, 10        | 150, 300  |
| RTOP100  |          | 0.046 to 1M               | 100                                  | 1, 2, 5, 10        | 150, 300  |
| DRTOP100 |          | 0.046 to 1M               | 200                                  | 1, 2, 5, 10        | 150, 300  |
| RTOP200  |          | 0.046 to 1M               | 200                                  | 1, 2, 5, 10        | 150, 300  |

### MECHANICAL SPECIFICATIONS

|                               |                             |
|-------------------------------|-----------------------------|
| Flammability                  | Insulated case              |
| Resistive Element             | Cermet                      |
| Substrate                     | Alumina on insulated base   |
| End Connections               | V connections: screw M4 x 6 |
| Tightening Torque Connections | 1 Nm                        |
| Tightening Torque Heatsink    | 2 Nm                        |
| Weight                        | 30 g max.                   |




### ENVIRONMENTAL SPECIFICATIONS

|                   |   |
|-------------------|---|
| Temperature Range | -55 $^\circ\text{C}$ to +125 $^\circ\text{C}$ |
| Climatic Category | 55 / 125 / 56                                 |

### TECHNICAL SPECIFICATIONS

|  |          |  |
|--|----------|--|
| Temperature Coefficient (-55 $^\circ\text{C}$ to +125 $^\circ\text{C}$ ) | Standard | $\pm 300$ ppm/ $^\circ\text{C}$ ( $R < 1$ )<br>$\pm 150$ ppm/ $^\circ\text{C}$ ( $R > 1$ ) |
| Insulation Resistance  |          | $> 10^6$ M $\Omega$  |

| PERFORMANCE              |   |                                 |
|--------------------------|---|---------------------------------|
| TESTS                    | CONDITIONS  | REQUIREMENTS                    |
| Momentary Overload       | IEC 60115-1<br>2.5 Pr/5 s $U_S < 2 U_L$                         | $< \pm (0.25 \% + 0.05 \Omega)$ |
| Rapid Temperature Change | IEC 60115-1<br>5 cycles, -55 °C, +125 °C                        | $< \pm (0.25 \% + 0.05 \Omega)$ |
| Load Life                | IEC 60115-1<br>Pr at 25 °C, 1000 h                              | $< \pm (0.5 \% + 0.05 \Omega)$  |
| Humidity (Steady State)  | IEC 60115-1 / IEC 60068-2-3 Test Ca<br>56 days, 95 % RH / 40 °C | $< \pm (0.5 \% + 0.05 \Omega)$  |

| SPECIAL FEATURES   |   |                             |   |                             |
|--|---|-----------------------------|---|-----------------------------|
| MODEL  | RTOP 200  | RTOP 100                    | DRTOP 100   | DRTOP 50                    |
| Power Rating at +25 °C<br>Chassis Mounted Resistors<br>Unmounted Resistors | 200 W<br>5 W  | 100 W<br>5 W                | 100 W<br>3.5 W  | 50 W<br>3.5 W               |
| Thermal Resistance (per Resistor)  | 0.5 °C/W  | 1 °C/W                      | 0.5 °C/W  | 1 °C/W                      |
| Limiting Voltage $U_L$   | 1500 V  | 1500 V                      | 500 V   | 500 V                       |
| Dielectric Strength <sup>(1)</sup><br>Connections/Chassis                  | 2500 V, 1 min<br>10 mA max.   | 2500 V, 1 min<br>10 mA max. | 2500 V, 1 min<br>10 mA max.   | 2500 V, 1 min<br>10 mA max. |
| Dielectric Strength <sup>(1)</sup><br>Connections/Resistors                | -   | -                           | 2500 V, 1 min<br>10 mA max.   | 2500 V, 1 min<br>10 mA max. |
| Ohmic Value Range  | 0.046 $\Omega$ to 1 M $\Omega$  |                             | 0.091 $\Omega$ to 1 M $\Omega$  |                             |
| Tolerance  | $\pm 1 \%$ to $\pm 10 \%$   |                             | $\pm 1 \%$ to $\pm 10 \%$   |                             |
| Electrical Diagrams  | <br><br>Shunt version |                             |  |                             |

**Note**
<sup>(1)</sup> MIL-STD-202 method 301



**RECOMMENDATIONS FOR MOUNTING ONTO A HEATSINK**

- Surfaces in contact must be carefully cleaned
- The heatsink must have an acceptable flatness: From 0.05 mm to 0.1 mm/100 mm
- Roughness of the heatsink must be around 6.3 μm. In order to improve thermal conductivity, surfaces in contact (alumina, heatsink) should be coated with a silicone grease (type SI 340 from Rhône-Poulenc or Dow 340 from Dow Corning)

|                               |      |
|-------------------------------|------|
| Tightening Torque on Heatsink | RTOP |
|                               | 2 Nm |

- For the electrical connections, it is recommended to use M4 x 6 screws and if necessary a washer of 1mm thickness. The recommended screw tightening torque is 1 Nm

**CHOICE OF THE HEATSINK**

The user must choose the heatsink according to the working conditions of the component (power, room temperature). Maximum working temperature must not exceed 125 °C. The dissipated power is simply calculated by the following ratio:

$$P = \frac{\Delta T}{R_{TH(j-c)} + R_{TH(c-h)} + R_{TH(h-a)}}$$

P: Expressed in W

ΔT: Difference between maximum working temperature and room temperature

R<sub>TH(j-c)</sub>: Thermal resistance value measured between resistive layer and outer side of the resistor. It is the thermal resistance of the component (see table Special Features)

R<sub>TH(c-h)</sub>: Thermal resistance value measured between outer side of the resistor and upper side of the heatsink  
This is the thermal resistance of the interface (grease, thermal pad), and the quality of the fastening device

R<sub>TH(h-a)</sub>: Thermal resistance of the heatsink

**Example:**

R<sub>TH(c-a)</sub>: For RTOP 200 power rating 130 W at ambient temperature +30 °C.

Thermal resistance (see table 1) R<sub>TH(j-c)</sub>: 0.5 °C/W

$$\Delta T = 125\text{ °C} - 30\text{ °C} \leq 95\text{ °C}$$

$$R_{TH(j-c)} + R_{TH(c-h)} + R_{TH(h-a)} = \frac{\Delta T}{P} = \frac{95}{130} = 0.73\text{ °C/W}$$

$$R_{TH(j-c)} = 0.112\text{ °C/W}$$

$$R_{TH(c-h)} + R_{TH(h-a)} = 0.73\text{ °C/W} - 0.5\text{ °C/W} \leq 0.23\text{ °C/W}$$




### OVERLOADS

The applied power is 2.5 x rated power for 5 s with a max. voltage of 2 x nominal voltage.

**Accidental overload:** The values indicated in the graph below are applicable to resistors in air or mounted onto a heatsink.


In case of multi-resistor devices, (DRTOP, TROP and QROP) the results apply to each resistor value in the device.

### ENERGY CURVE

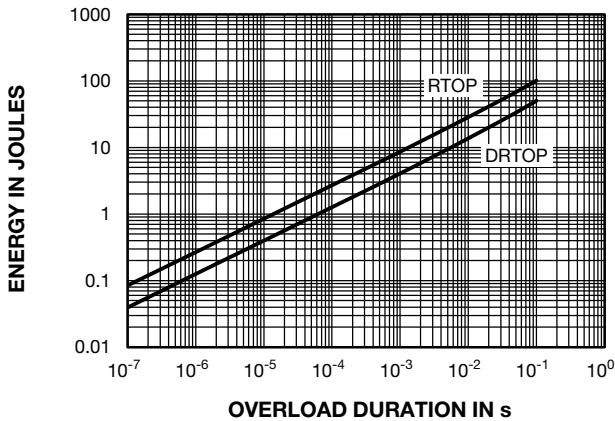


### POWER RATING

The temperature of the heater should be maintained in the limit specified. To improve the thermal conductivity, surfaces in contact should be laid on with a silicon grease and the torque applied on the screw for tightening should be around 2 Nm.

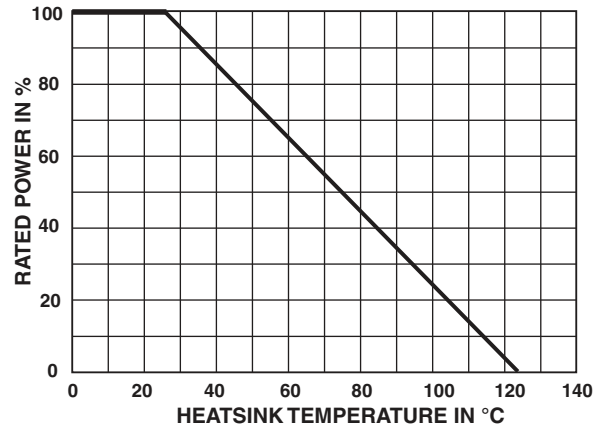

### POWER CURVE

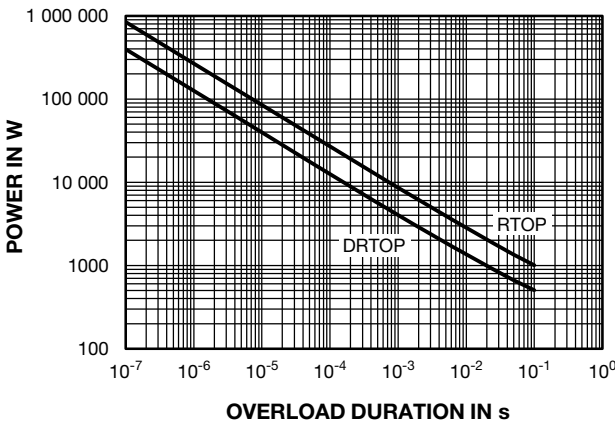

### PACKAGING

Box of 10 units

### MARKING

Series, style, ohmic value (in), tolerance (in %), manufacturing date, Vishay Sfernice trademark.



| ORDERING INFORMATION |       |             |                                   |                                 |                            |               |            |                |
|----------------------|-------|-------------|-----------------------------------|---------------------------------|----------------------------|---------------|------------|----------------|
| RTOP                 | 200   | 5U          | ± 1 %                             | ± %                             | V                          |               |            |                |
| DRTOP                | 50    | 150U        | 5 %                               | 15U                             | 5 %                        | V             | XXX BO10 e |                |
|                      |       |             |                                   | R1                              | T1                         | R2            |            |                |
| MODEL                | STYLE | OHMIC VALUE | ABSOLUTE TOLERANCE PER RESISTOR   |                                 | CONNECTIONS                | CUSTOM DESIGN | PACKAGING  | LEAD (Pb)-FREE |
| RTOP                 | 100   |             | Optional                          | To be precise for each resistor | V: screw<br>VS: RTOP shunt | Optional      |            |                |
| DRTOP                | 50    |             | ± 1 %<br>± 2 %<br>± 5 %<br>± 10 % |                                 |                            |               |            |                |

| GLOBAL PART NUMBER INFORMATION |            |                              |   |  |   |   |   |                      |                           |   |   |   |   |  |
|--------------------------------|------------|------------------------------|---|--|---|---|---|----------------------|---------------------------|---|---|---|---|--|
| R                              | T          | O                            | P | 1  | 0 | 0 | V   | 5                    | R                         | 0 | 0 | J | B |  |
| MODEL                          | SIZE       | LEADS                        |   | OHMIC VALUE  |   |   | TOLERANCE                                 | PACKAGING            | SPECIAL                   |   |   |   |   |  |
| RTOP                           | 100<br>200 | V = screw<br>VS = RTOP shunt |   | The first three digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point.<br>48R7 = 48.7 Ω<br>4871 = 4870 Ω<br>1002 = 10 000 Ω<br>R010 = 0.01 Ω<br>R680 = 0.68 Ω<br>2710 = 2.7 kΩ |   |   | F = 1 %<br>G = 2 %<br>J = 5 %<br>K = 10 % | B = box<br>10 pieces | As applicable<br>Ex = UA1 |   |   |   |   |  |

| GLOBAL PART NUMBER INFORMATION |            |           |   |  |  |   |                      |                           |   |   |   |   |   |   |   |   |  |
|--------------------------------|------------|-----------|---|--|--|---|----------------------|---------------------------|---|---|---|---|---|---|---|---|--|
| D                              | R          | T         | O | P  | 0  | 5   | 0                    | V                         | 1 | 0 | 3 | 1 | 0 | 3 | J | B |  |
| GLOBAL MODEL                   | SIZE       | LEADS     |   | VALUE No. 1  | VALUE No. 2  | TOLERANCE                                 | PACKAGING            | SPECIAL                   |   |   |   |   |   |   |   |   |  |
| DRTOP                          | 050<br>100 | V = screw |   | The first two digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point.<br>103 = 10 kΩ<br>470 = 47.0 Ω<br>222 = 2.20 kΩ | The first two digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point.<br>103 = 10 kΩ<br>470 = 47.0 Ω<br>222 = 2.20 kΩ | F = 1 %<br>G = 2 %<br>J = 5 %<br>K = 10 % | B = box<br>10 pieces | As applicable<br>Ex = UA1 |   |   |   |   |   |   |   |   |  |



| GLOBAL PART NUMBER INFORMATION |            |           |  |   |   |   |   |                             |                                  |   |   |   |   |   |  |
|--------------------------------|------------|-----------|--|---|---|---|---|-----------------------------|----------------------------------|---|---|---|---|---|--|
| D                              | R          | T         | O  | P | 1 | 0 | 0   | V                           | 1                                | 0 | 1 | 2 | J | B |  |
| MODEL                          | SIZE       | LEADS     | VALUE (two values are identical and cannot be coded in three digits) in four digits  |   |   |   | TOLERANCE   | PACKAGING                   | SPECIAL                          |   |   |   |   |   |  |
| DRTOP                          | 050<br>100 | V = screw | The first three digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point.<br><b>1012</b> = 10.1 kΩ<br><b>48R7</b> = 48.7 Ω<br><b>2241</b> = 2.24 kΩ |   |   |   | <b>F</b> = 1 %<br><b>G</b> = 2 %<br><b>J</b> = 5 %<br><b>K</b> = 10 % | <b>B</b> = box<br>10 pieces | As applicable<br><b>Ex</b> = UA1 |   |   |   |   |   |  |

| RELATED DOCUMENTS   |  |
|---|--|
| <b>APPLICATION NOTES</b>  |  |
| Potentiometers and Trimmers                                       | <a href="http://www.vishay.com/doc?51001">www.vishay.com/doc?51001</a> |
| Guidelines for Vishay Sfernice Resistive and Inductive Components | <a href="http://www.vishay.com/doc?52029">www.vishay.com/doc?52029</a> |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.