

VOLTAGE RANGE CURRENT 50 to 800 Volts 2.0 Ampere

RoHS

Features


- Super fast switching speed
- Glass passivated chip junction
- Low power loss, high efficiency
- · Low leakage
- High Surge Capacity
- High temperature soldering guaranteed 260°C/10 seconds, 0.375"(9.5mm) lead length

Mechanical Data

- Case: Transfer molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.012ounce, 0.39 grams

Maximum Ratings and Electrical Characteristics

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

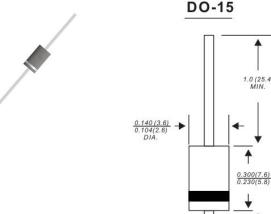

Dimensions in inches and (millimeters)

.031 (0.78) .027 (0.68) DIA.

TYPE NUMBER	SYMBOLS	SF21	SF22	SF23	SF24	SF26	SF28	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	300	400	600	800	Volts
Maximum RMS Voltage	$V_{\scriptscriptstyle RMS}$	70	140	210	280	420	560	Volts
Maximum DC Blocking Voltage	V_{DC}	100	200	300	400	600	800	Volts
Maximum Average Forward Rectified Current 0.375"(9.5mm) lead length at $T_A=75^{\circ}C$	I _(AV)			2	.0			Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	50			Amps			
Maximum Instantaneous Forward Voltage at 2.0A	$V_{\scriptscriptstyle F}$	0.9	95	1.	25	1.	70	Volts
Maximum DC Reverse Current at rated DC blocking $T_A = 25^{\circ}$ C Voltage at $T_A = 125^{\circ}$ C	l _R				.0			μΑ
Maximum Reverse Recovery Time (NOTE 1)	T_{RR}			3	15			nS
Typical Junction Capacitance (NOTE 2)	C _J		30			25		рF
Typical Thermal Resistance (NOTE 3)	$R_{\theta JA}$			5	50			°C/W
Operating Junction Temperature Range	T,			(-55 tc	+150)			℃
Storage Temperature Range	T _{stg}			(-55 tc	+150)			°C

Notes:

- 1. Reverse Recovery Test Conditions:If=0.5A,Ir=1.0A,Irr=0.25A
- 2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.
- 3. Thermal Resistance from Junction to Ambient with 0.375" (9.5mm) lead length, PCB mounted.



VOLTAGE RANGE CURRENT 50 to 800 Volts 2.0 Ampere

Ratings and Characteristic Curves (T_A=25°C unless otherwise noted)

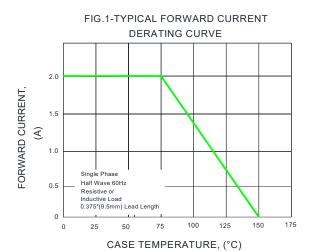


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

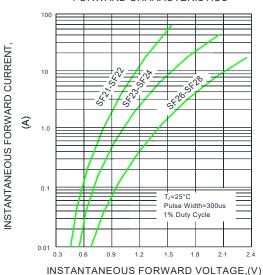


FIG.5-TYPICAL JUNCTION CAPACITANCE

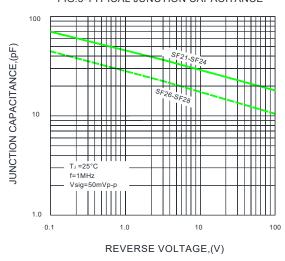


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT

TO SOLUTION STATE OF THE PEAK
FORWARD SURGE CURRENT


FORWARD SURGE CURRENT

FORWARD SURGE CURRENT


TO SOLUTION SURGE CURRENT

FORWARD SUR

FIG.4-TYPICAL REVERSE CHARACTERISTICS

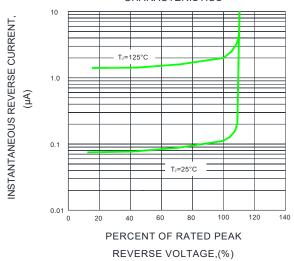

F1G.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

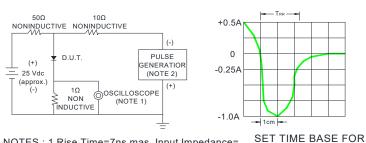

NOTES : 1.Rise Time=7ns mas. Input Impedance= 1 magohm. 22pF


2.Rise time=10ns max. Source Impedance= 50 ohms

50/100ns/cm



VOLTAGE RANGE CURRENT 50 to 800 Volts 2.0 Ampere


Axial Lead Taping Specifications for Rectifiers

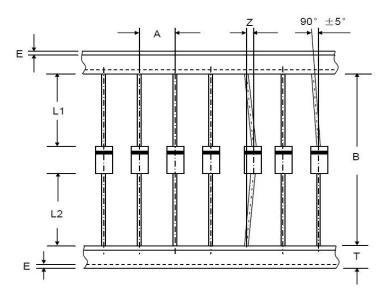

Component Outline	Component Pitch A	Inner Tape Pitch B		Cumulative Tolerance	
Component Outline	±0.5mm	+0.5mm -0.4mm			
DO-204AC(DO-15)	5.0mm	52.4mm	26.0mm	2.0mm/20pitch	

ltem	Symbol	Specifications(mm)	Specifications(inch)
Component alignment	Z	1.2 max	0.048 max
Tape width	Т	6.0±0.4	0.236±0.016
Exposed adhesive	Е	0.8 max	0.032 max
Body eccentricity	IL1-L2I	1.0 max	0.040 max


Dimensions (DO-15/DO-204AC)

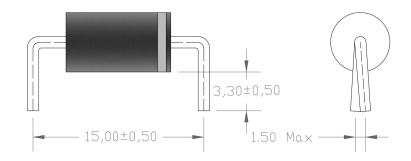



VOLTAGE RANGE CURRENT 50 to 800 Volts 2.0 Ampere

Reflow Profile

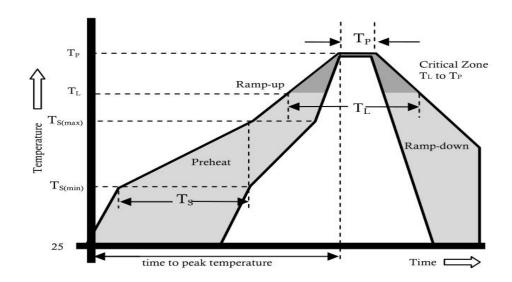

Reflow Condition		Pb-Free Assembly		
Temperature Min.		+150°C		
Pre Heat	Temperature Max.	+200°C		
	Time(Min to Max)	60-180 secs.		
Average ramp up rate(Liquidus Temp(T _L) to peak)		3°C/sec. Max.		
T₅(max) to T₁ - Ramp-up Rate		3°C/sec. Max.		
Deflow	Temperature (T _∟)(Liquidus)	+217°C		
Reflow	Temperature (T₁)	60-150 secs.		
Peak Temp (T _P)		+(260+0/-5)°C		
Time within 5°C of actual Peak Temp (T₂)		25 secs.		
Ramp-down Rate		6°C/sec. Max.		
Time 25°C to peak Temp (T₂)		8 min. Max.		
Do not exceed		+260°C		



VOLTAGE RANGE CURRENT 50 to 800 Volts 2.0 Ampere

Disclaimer

The information presented in this document is for reference only. Chongqing changjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Changjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http://www.czlangjie.com, or consult your nearest Langjie's sales office for further assistance.