


### 3-Terminal 1.5 A Positive Voltage Regulator

The 7812 3-terminal positive regulators are available in the TO-220AB package and with several fixed output voltages, making them useful in a wide range of applications. Each type employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1.5A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

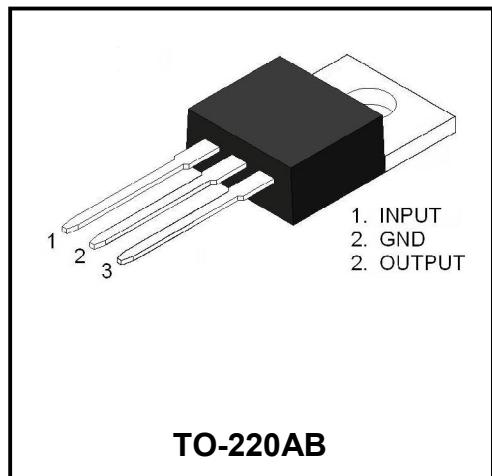


#### Features

- Output Current up to 1.5A
- Output Voltages of 12V
- Thermal Overload Protection
- Short Circuit Protection
- Output Transistor Safe Operating area (SOA)Protection

#### Description

The 7812 3-terminal positive regulators are available in the TO-220AB package with several fixed output voltages making it useful in a wide range of applications.

#### Internal Block Diagram

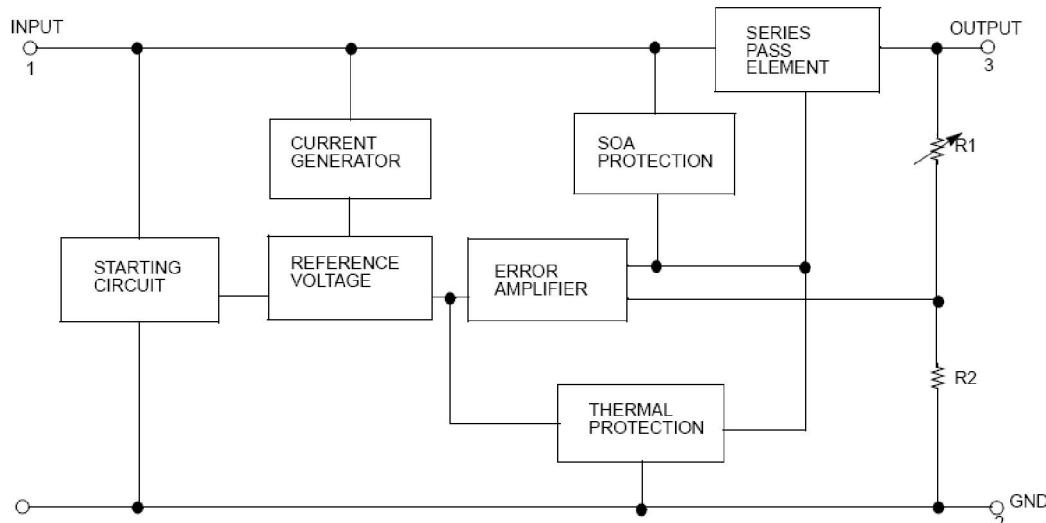

#### Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input Voltage	$V_{IN}$	30	V
Output Current	$I_{OUT}$	1.5	A
Power Dissipation	$P_D$	Internally Limited	W
Operating Junction Temperature Range	$T_{OPR}$	0 ~ 150	°C
Storage Temperature Range	$T_{STG}$	-55 ~ + 150	°C

**Thermal Resistances**

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-Case	$R_{\theta JC}$	5	°C/W
Thermal Resistance Junction-Air ( $T_a = +25^\circ C$ )	$R_{\theta JA}$	65	°C/W

**Electrical Characteristics**


(Refer to the test circuits,  $I_O = 0.75A$ ,  $V_I = 19V$ ,  $C_L = 0.33\mu F$ ,  $C_O = 0.1\mu F$  unless otherwise specified)

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Output Voltage	$V_O$	$I_O = 5mA \sim 1A$	11.5	12	12.5	V
		$V_I = 14.5 \sim 27V$ , $I_O = 5mA \sim 1.5A$	11.4	12	12.6	
Line Regulation(Note)	$\Delta V_O$	$T_j = 25^\circ C$	$V_I = 14.5V \sim 30V$		240	mV
			$V_I = 16V \sim 30V$		120	
Load Regulation(Note)	$\Delta V_O$	$T_j = 25^\circ C$	$I_O = 5mA \sim 1.5 A$		240	mV
			$I_O = 0.25A \sim 1.5A$		120	
Quiescent Current	$I_Q$	$T_j = 25^\circ C$			8.0	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5mA \sim 1.5A$			0.5	mA
		$V_I = 14.5 \sim 30V$			1.0	
Output Voltage Drift	$\Delta V / \Delta T$	$I_O = 5mA$ , $T_j = 0 \sim 125^\circ C$		-0.8		mV/°C
Output Noise Voltage	$V_N$	$f = 10Hz \sim 100KHz$		75		μV
Ripple Rejection	RR	$f = 120Hz$ , $V_I = 15 \sim 25V$	55			dB
Dropout Voltage	$V_D$	$T_j = 25^\circ C$ , $I_O = 500mA$		2		V
Short Circuit Current	$I_{SC}$	$T_j = 25^\circ C$ , $V_I = 35V$		300		mA
Peak Current	$I_{PK}$	$T_j = 25^\circ C$		2.2		A


**Notes:**

Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.


Test Circuits

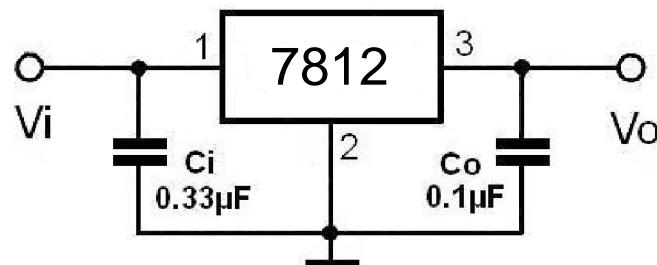

DC Parameter

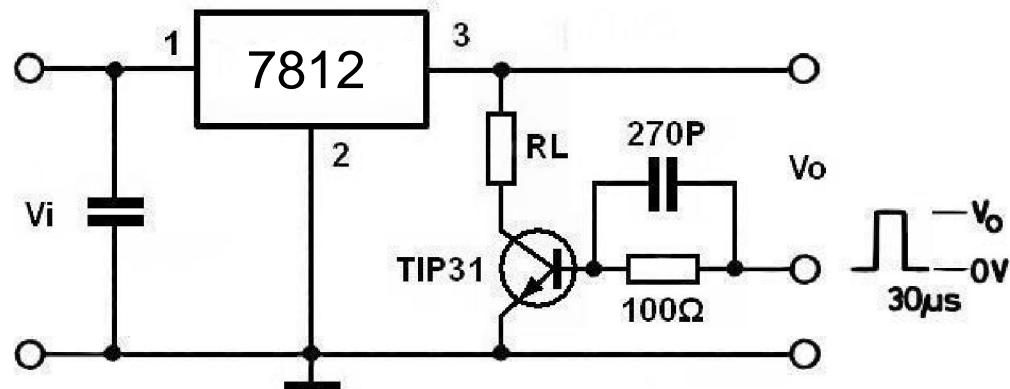


Load Regulation

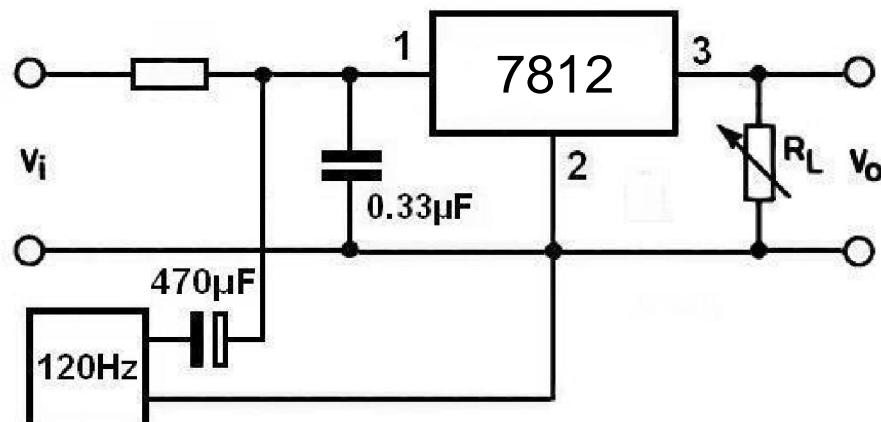

Ripple Rejection

**Package Dimensions**

TO-220AB	Symbol	Millimeter		Inches	
		Min.	Max.	Min.	Max.
	A	4.30	4.70	0.169	0.185
	A1	0.00	0.15	0.000	0.006
	b	0.71	0.91	0.028	0.036
	b1	1.17	1.37	0.046	0.054
	c	0.30	0.50	0.012	0.020
	c1	1.17	1.37	0.046	0.054
	D	9.90	10.20	0.390	0.402
	E	8.50	8.90	0.335	0.350
	E1	12.00	12.50	0.472	0.492
	e	2.44	2.64	0.096	0.104
	e1	4.88	5.28	0.192	0.208
	F	2.60	2.80	0.102	0.110
	L	13.20	13.80	0.520	0.543
	L1	3.80	4.20	0.150	0.165
	Φ	3.60	3.96	0.142	0.156

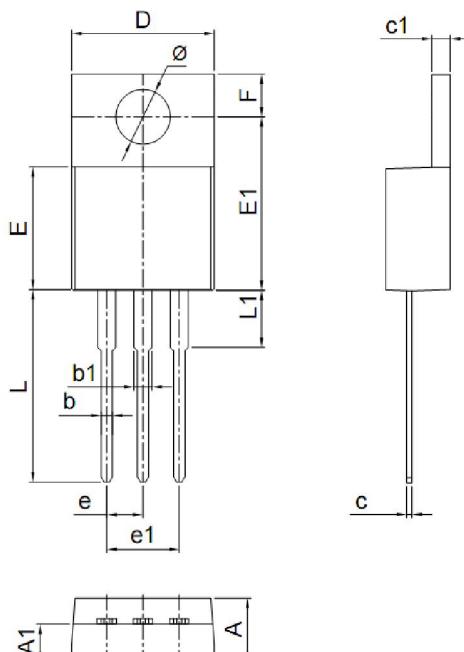
**Product Specification Classification**

Part Number	Package	Marking	Pack
7812	TO-220AB	YFW 7812 XXXXX	1000PCS /box