

### FEATURES/BENEFITS

- 16-bit Function compatible to the 74F245, 74ABT245 and 74FCT245T
- CMOS power levels: <15mW static
- Available in 40-pin QVSOP (Q2)
- TTL-compatible input and output levels
- Ground bounce controlled outputs
- Reduced output swing of 0-3.5V
- Undershoot clamp diodes on all inputs

#### FCT-T 2X245T

- JEDEC-FCT spec compatible
- Fastest CMOS logic family available
- A and C speed grades; 4.1ns  $t_{PD}$  for C
- $I_{OL} = 64mA$


#### FCT-T 2X2245T


- Built-in 25Ω series resistor outputs reduce reflection and other system noise
- A and C speed grades; 4.1ns  $t_{PD}$  for C
- $I_{OL} = 12mA$

### DESCRIPTION

The FCT2X245T and FCT2X2245T are 16-bit non-inverting transceivers with three-state outputs that are useful for bus-oriented applications. The Transmit/Receive ( $T/\bar{R}$ ) inputs determine the direction of data flow, whether from A-to-B or B-to-A, and the Output Enable ( $\bar{OE}$ ) inputs enable the selected port for output. The FCT2X2245T is a 25Ω resistor output version useful for driving transmission lines and reducing system noise. All inputs have clamp diodes for undershoot noise suppression. All outputs have ground bounce suppression (see QSI Application Note AN-001), and outputs will not load an active bus when  $V_{CC}$  is removed from the device.

**Figure 1. Functional Block Diagram**

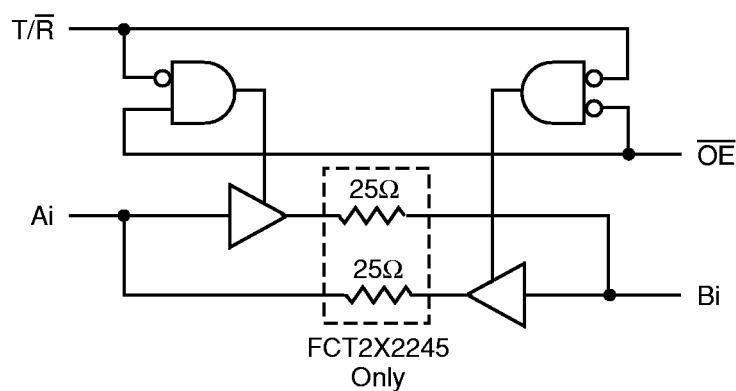

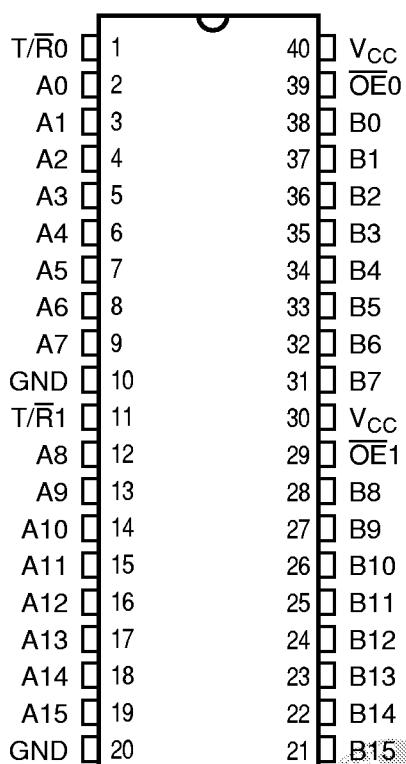**Figure 2. Pin Configuration (All Pins Top View)****Table 1. Pin Description**

Name	I/O	Description
A <sub>i</sub>	I/O	Data Bus A
B <sub>i</sub>	I/O	Data Bus B
T/R0	I	Direction for A/B7-A/B0
T/R1	I	Direction for A/B15-A/B8
OE0	I	Output Enables for A/B7-A/B0
OE1	I	Output Enables for A/B15-A/B8

**Table 2. Function Table**

OE <sub>n</sub>	T/R <sub>n</sub>	Bus A	Bus B	Function
H	X	Hi-Z	Hi-Z	Disable
L	L	Output	Input	Bus B to Bus A
L	H	Input	Output	Bus A to Bus B

**Table 3. Absolute Maximum Ratings**

Supply Voltage to Ground .....	-0.5V to +7.0V
DC Output Voltage $V_{OUT}$ .....	-0.5V to +7.0V
DC Input Voltage $V_{IN}$ .....	-0.5V to +7.0V
AC Input Voltage (for a pulse width $\leq 20\text{ns}$ ) .....	-3.0V
DC Input Diode Current with $V_{IN} < 0$ .....	-20mA
DC Output Diode Current with $V_{OUT} < 0$ .....	-50mA
DC Output Current Max. Sink Current/Pin .....	120mA
Maximum Power Dissipation .....	1.2 Watts
$T_{STG}$ Storage Temperature .....	-65° to +150°C

**Note:** Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to this device resulting in functional or reliability type failures.

**Table 4. Capacitance**

$T_A = 25^\circ\text{C}$ ,  $f = 1\text{MHz}$ ,  $V_{IN} = 0\text{V}$ ,  $V_{OUT} = 0\text{V}$

Pins	Typ	Unit
1, 11, 29, 39	4	pF
2-9, 12-19, 21-28, 31-38	8	pF

**Note:** Capacitance is characterized but not tested.

**Table 5. DC Electrical Characteristics Over Operating Range**

Industrial  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ ,  $V_{CC} = 5.0\text{V} \pm 5\%$

Symbol	Parameter	Test Conditions	Min	Typ <sup>(1)</sup>	Max	Unit
$V_{IH}$	Input HIGH Voltage	Logic HIGH for All Inputs	2.0	—	—	V
$V_{IL}$	Input LOW Voltage	Logic LOW for All Inputs	—	—	0.8	V
$\Delta V_T$	Input Hysteresis	$V_{TLH} - V_{THL}$ for All Inputs <sup>(3)</sup>	—	0.2	—	V
$ I_{IH} $ $ I_{IL} $	Input Current Input HIGH or LOW	$V_{CC} = \text{Max.}, 0 \leq V_{IN} < V_{CC}$	—	—	5	$\mu\text{A}$
$ I_{OZ} $	Off-State Output Current (Hi-Z)	$V_{CC} = \text{Max.}, 0 \leq V_{IN} \leq V_{CC}$	—	—	5	$\mu\text{A}$
$I_{OS}$	Short Circuit Current FCT2X245	$V_{CC} = \text{Max.}, V_{OUT} = \text{GND}^{(2,3)}$	-60	—	-225	mA
$I_{OR}$	Current Drive FCT2X2245 (25 $\Omega$ )	$V_{CC} = \text{Max.}, V_{OUT} = 2.0\text{V}$	50	—	—	mA
$V_{IC}$	Input Clamp Voltage	$V_{CC} = \text{Min.}, I_{IN} = -18\text{mA}^{(3)}$	—	-0.7	-1.2	V
$V_{OH}$	Output HIGH Voltage	$V_{CC} = \text{Min.}, I_{OH} = -15\text{mA}$	2.4	—	—	V
$V_{OL}$	Output LOW Voltage FCT2X245	$V_{CC} = \text{Min.}, I_{OL} = 64\text{mA}$	—	—	0.55	V
$V_{OL}$	Output LOW Voltage FCT2X2245 (25 $\Omega$ )	$V_{CC} = \text{Min.}, I_{OL} = 12\text{mA}$	—	—	0.50	V
$R_{OUT}$	Output Resistance FCT2X2245 (25 $\Omega$ )	$V_{CC} = \text{Min.}, I_{OL} = 12\text{mA}$	20	28	40	$\Omega$

**Notes:**

1. Typical values indicate  $V_{CC} = 5.0\text{V}$  and  $T_A = 25^\circ\text{C}$ .
2. Not more than one output should be shorted and the duration is  $\leq 1$  second.
3. These parameters are guaranteed by design but not tested.

**Table 6. Power Supply Characteristics**

Symbol	Parameter	Test Conditions <sup>(1)</sup>	Min	Max	Unit
I <sub>CC</sub>	Quiescent Power Supply Current	V <sub>CC</sub> = Max., Freq = 0 0V ≤ V <sub>IN</sub> ≤ 0.2V or V <sub>CC</sub> -0.2V ≤ V <sub>IN</sub> ≤ V <sub>CC</sub>	—	3.0	mA
ΔI <sub>CC</sub>	Supply Current per Input @ TTL HIGH	V <sub>CC</sub> = Max., V <sub>IN</sub> = 3.4V, Freq = 0 <sup>(2)</sup>	—	2.0	mA
Q <sub>CCD</sub>	Supply Current per Input per MHz	V <sub>CC</sub> = Max., Outputs Open and Enabled One Bit Toggling @ 50% Duty Cycle Other Inputs at GND or V <sub>CC</sub> <sup>(3,4)</sup>	—	0.25	mA/ MHz

**Notes:**

- For conditions shown as Min. or Max., use the appropriate values specified under DC specifications.
- Per TTL driven input (V<sub>IN</sub> = 3.4V).
- Q<sub>CCD</sub> is a measurement of device power consumption only and does not include power to drive load capacitance or tester capacitance. This parameter is guaranteed by design but not tested.
- I<sub>C</sub> can be computed using the above parameters as explained in the Technical Overview section.

**Table 7. Switching Characteristics Over Operating Range**Industrial: T<sub>A</sub> = -40°C to 85°C, V<sub>CC</sub> = 5.0V ±5%C<sub>LOAD</sub> = 50pF, R<sub>LOAD</sub> = 500Ω unless otherwise noted.

Symbol	Description <sup>(1)</sup>	2X245A 2X2245A		2X245C 2X2245C		Unit
		Min	Max	Min	Max	
t <sub>PHL</sub> t <sub>PLH</sub>	Propagation Delay Ai to Bi	1.5	4.6	1.5	4.1	ns
t <sub>PZH</sub> t <sub>PZL</sub>	Output Enable Time OE, T/R to A/B	1.5	6.2	1.5	5.8	ns
t <sub>PHZ</sub> t <sub>PLZ</sub>	Output Disable Time <sup>(2)</sup> OE, T/R to A/B	1.5	5.0	1.5	4.5	ns

**Notes:**

- Minimums guaranteed but not tested. See Test Circuit and Waveforms.
- This parameter is guaranteed but not tested.