

Noise suppression filter For power line (Cellular band suppression) **MAF** series









# MAF1005P type














## **FEATURES**

- A compact noise suppression component for power lines and quick charging lines that accommodates high currents.
- The DC superimposition characteristics are improved by adopting the newly developed ferrite material.
- Since the DC resistance is as small as mW level, the power loss is small and it contributes to the improvement of power
- Operating temperature range: -55 to +125°C

#### **APPLICATION**

- Fast charging line, power supply line for smartphones, tablets, wearable devices, etc.
- Quick charging line and power supply line for portable game consoles
- Power line of base station RF circuit

### PART NUMBER CONSTRUCTION



#### CHARACTERISTICS SPECIFICATION TABLE

Impedance	DC resistance	Rated current*	Part No.	
[900MHz]				
(Ω)Typ.	(Ω)max.	(A)max.		
12	0.009	6	MAF1005PAD120CT000	


<sup>\*</sup> Please refer to the graph of rated current vs. temperature characteristics (derating) about the rating current at 85°C or more in temperature of the product.

#### Measurement equipment

Measurement item	Product No.	Manufacturer
Impedance	4991A+16192A	Keysight Technologies
DC resistance	Type-755611	Yokogawa

<sup>\*</sup> Equivalent measurement equipment may be used.

## Rated current vs. temperature characteristics (derating)

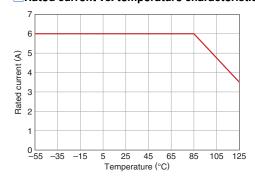









# MAF1005P type

# **Z FREQUENCY CHARACTERISTICS**

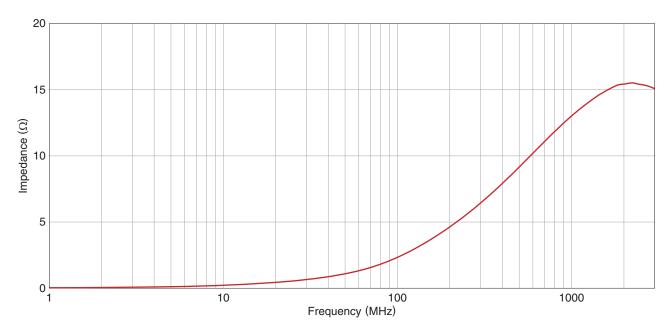


# **INSERTION LOSS VS. FREQUENCY CHARACTERISTICS**

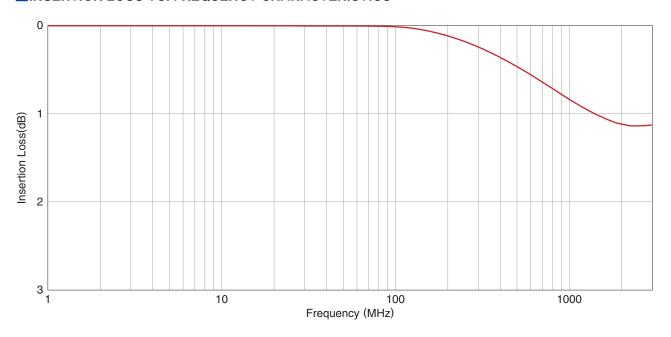




# MAF1005P type

### **SHAPE & DIMENSIONS**

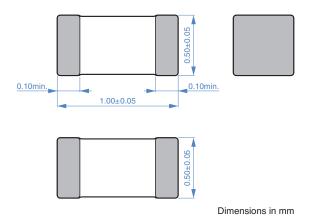


#### RECOMMENDED LAND PATTERN



Dimensions in mm


#### PACKAGING STYLE

#### REEL DIMENSIONS

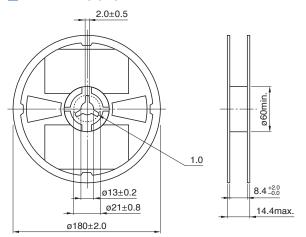


Dimensions in mm

#### **TAPE DIMENSIONS**

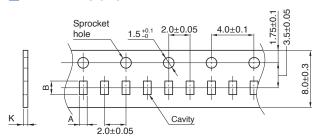

Dimensions in mm

Туре	Α	В	K
MAF1005P	0.65±0.1	1.15±0.1	0.8max.



Dimensions in mm

PACKAGE QUANTITY	Difficultions in the
Package quantity	10,000 pcs/reel


# TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Operating temperature range *	Storage temperature range **	Individual weight
-55 to +125°C	-55 to +125°C	1.2 mg

\* Operating temperature range includes self-temperature rise.

\*\* The storage temperature range is for after the assembly.

#### RECOMMENDED REFLOW PROFILE

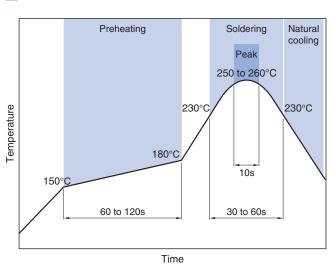

(5) Atomic energy-related equipment

(6) Seabed equipment

# REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

# **SAFETY REMINDERS**

Please pay sufficient attention to the warnings for safe designing when using this products

# REMINDERS

The storage period is within 12 months. Be sure to follow the st RH or less).	
If the storage period elapses, the soldering of the terminal elec	trodes may deteriorate.
ODo not use or store in locations where there are conditions suc	h as gas corrosion (salt, acid, alkali, etc.).
OBefore soldering, be sure to preheat components.  The preheating temperature should be set so that the temperature does not exceed 150°C.	ture difference between the solder temperature and chip
Soldering corrections after mounting should be within the rang If overheated, a short circuit, performance deterioration, or life	
OWhen embedding a printed circuit board where a chip is mount due to the overall distortion of the printed circuit board and pa	
Self heating (temperature increase) occurs when the power is thermal design.	turned ON, so the tolerance should be sufficient for the set
Carefully lay out the coil for the circuit board design of the non A malfunction may occur due to magnetic interference.	-magnetic shield type.
Ouse a wrist band to discharge static electricity in your body thr	ough the grounding wire.
On not expose the products to magnets or magnetic fields.	
On not use for a purpose outside of the contents regulated in t	he delivery specifications.
The products listed on this catalog are intended for use in gene equipment, home appliances, amusement equipment, compute measurement equipment, industrial robots) under a normal ope. The products are not designed or warranted to meet the require or quality require a more stringent level of safety or reliability, damage to society, person or property.  If you intend to use the products in the applications listed belo conditions set forth in the each catalog, please contact us.	er equipment, personal equipment, office equipment, eration and use condition. ements of the applications listed below, whose performance and or whose failure, malfunction or trouble could cause serious
<ul><li>(1) Aerospace/aviation equipment</li><li>(2) Transportation equipment (cars, electric trains, ships, etc.)</li><li>(3) Medical equipment</li><li>(4) Power-generation control equipment</li></ul>	<ul><li>(7) Transportation control equipment</li><li>(8) Public information-processing equipment</li><li>(9) Military equipment</li><li>(10) Electric heating apparatus, burning equipment</li></ul>

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

(11) Disaster prevention/crime prevention equipment

(13) Other applications that are not considered general-purpose

(12) Safety equipment

applications