公TDK

Inductors for power circuits **Multilayer ferrite MLP** series





MLP2012 type

FEATURES

A low-loss magnetic material is used so that a low-loss inductor for the power supply circuit can be achieved.

In addition to the inductance value, product types with various features are available so that they can be compatible with different usages.

Htype: this product uses a low-loss material and has low DC resistance.

* Optimal for when heavy load power efficiency is important. as with the H type, this product with a low-loss magnetic material and that has good DC superimposition type Vtype : as with the H type, this product with a low-loss magnetic material characteristics. * Optimal for when light load power efficiency is important. Stype : STD product lineup that includes a wide L value and various sizes.

Operating temperature range: -40 to +125°C (including self-temperature rise)

APPLICATION

Osmart phones, tablet terminals, digital cameras, video cameras, HDDs, power supply modules, etc.

PART NUMBER CONSTRUCTION

ML	P 2012	Н	R47	М	Т	0S1
Series	L×W×Tdimensions	Characteristic	Inductance	Height	Packaging	Internal
name	2.0×1.25 mm	type	(μH)	0.55 mm max.1.0 mm max.	style	code

CHARACTERISTICS SPECIFICATION TABLE

Туре		Thickness	L	Measuring frequency	DC resistance	Rated current*	Part No.
		Т					
		(mm)max.	(µH) Tolerance	(MHz)	(Ω)±30%	(mA)max.	
		1.00	0.47 ±20%	2	0.070	1300	MLP2012HR47MT0S1
	Low	1.00	0.54 ±20%	2	0.065	1300	MLP2012HR54MT0S1
	Low resistance	1.00	1.00 ±20%	2	0.120	1100	MLP2012H1R0MT0S1
	resistance	1.00	1.50 ±20%	2	0.120	1100	MLP2012H1R5MT0S1
		1.00	2.20 ±20%	2	0.150	1000	MLP2012H2R2MT0S1
Low core loss		0.55	1.00 ±20%	2	0.260	700	MLP2012V1R0TT0S1
	Emphasized	1.00	0.47 ±20%	2	0.110	1100	MLP2012VR47MT0S1
	DC bias	1.00	1.00 ±20%	2	0.200	900	MLP2012V1R0MT0S1
	characteristics	1.00	1.50 ±20%	2	0.230	800	MLP2012V1R5MT0S1
		1.00	2.20 ±20%	2	0.280	700	MLP2012V2R2MT0S1
		1.00	4.70 ±20%	2	0.400	600	MLP2012V4R7MT0S1


Background red: The product which is planning to stop production

* Rated current: current assumed when temperature has risen to 40°C max.

Measurement equipment

Measurement item	Product No.	Manufacturer
L	4294A+16034G	Keysight Technologies
DC resistance	Type-755611	Yokogawa

* Equivalent measurement equipment may be used.



A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

MLP2012 type

CHARACTERISTICS SPECIFICATION TABLE

Туре	Thickness	L	Measuring frequency	DC resistance	Rated current*	Part No.
	т					
	(mm)max.	(µH) Tolerance	(MHz)	(Ω)±30%	(mA)max.	
	0.55	0.47 ±20%	2	0.12	1200	MLP2012SR47TT0S1
	0.55	0.82 ±20%	2	0.13	1200	MLP2012SR82TT0S1
	0.55	1.00 ±20%	2	0.23	800	MLP2012S1R0TT0S1
	0.55	1.50 ±20%	2	0.27	700	MLP2012S1R5TT0S1
	0.55	2.20 ±20%	2	0.33	600	MLP2012S2R2TT0S1
STD product	1.00	0.47 ±20%	2	0.09	1200	MLP2012SR47MT0S1
	1.00	1.00 ±20%	2	0.16	1000	MLP2012S1R0MT0S1
	1.00	1.50 ±20%	2	0.16	1000	MLP2012S1R5MT0S1
	1.00	2.20 ±20%	2	0.23	800	MLP2012S2R2MT0S1
	1.00	3.30 ±20%	2	0.19	900	MLP2012S3R3MT0S1
	1.00	4.70 ±20%	2	0.26	700	MLP2012S4R7MT0S1

Background red: The product which is planning to stop production

* Rated current: current assumed when temperature has risen to 40°C max.

Measurement equipment


Measurement item	Product No.	Manufacturer
L	4294A+16034G	Keysight Technologies
DC resistance	Type-755611	Yokogawa

* Equivalent measurement equipment may be used.

inductor_commercial_power_mlp2012_en

MLP2012 type (H characteristic product, T dimension of the product 1.0mm max.)

L FREQUENCY CHARACTERISTICS

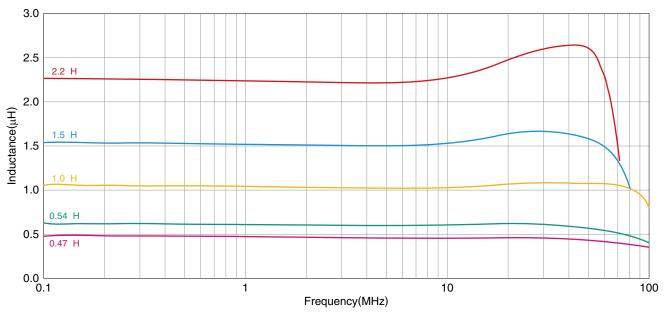


Measurement equipment

Product No.	Manufacturer
4294A+16034G	Keysight Technologies
* E · · · · · · · · · · ·	

* Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

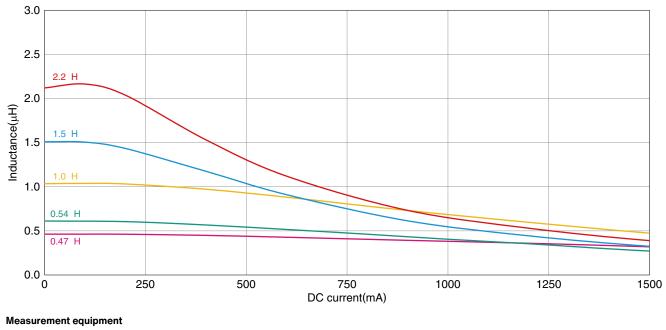

Product No.


Manufacturer 4285A+42841A+42842C+42851-61100 **Keysight Technologies**

* Equivalent measurement equipment may be used.

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

MLP2012 type (V characteristic product, T dimension of the product 0.55mm max.)

L FREQUENCY CHARACTERISTICS

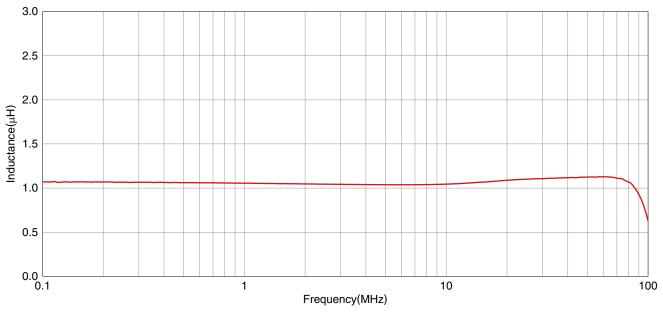


Measurement equipment

Product No.	Manufacturer	
4294A+16034G	Keysight Technologies	
* Equivalent managerement equipment may be used		

* Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

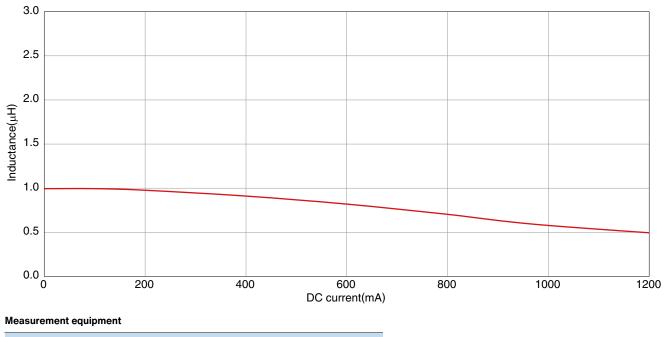


Product No. Manufacturer

4285A+42841A+42842C+42851-61100 Keysight Technologies

* Equivalent measurement equipment may be used.

MLP2012 type (V characteristic product, T dimension of the product 1.0mm max.)

L FREQUENCY CHARACTERISTICS

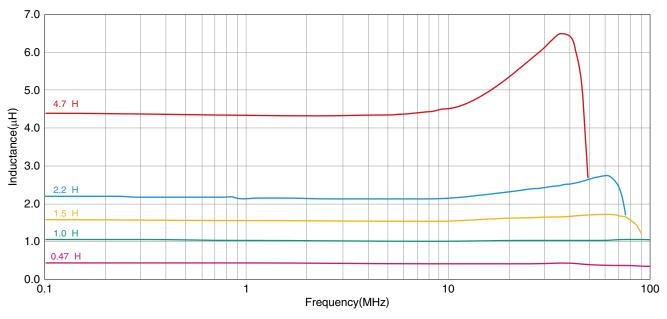


Measurement equipment

Product No.	Manufacturer		
4294A+16034G	Keysight Technologies		
* E and e al anti-anti-anti-anti-anti-anti-anti-anti-			

* Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

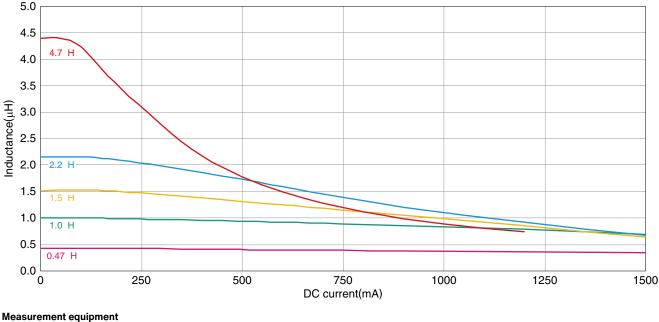

weasurement equipment

Product No.	Manufacturer
FIGUULLING.	Manufacturei


⁴²⁸⁵A+42841A+42842C+42851-61100 Keysight Technologies

* Equivalent measurement equipment may be used.

20231128

MLP2012 type (S characteristic product, T dimension of the product 0.55mm max.)

L FREQUENCY CHARACTERISTICS

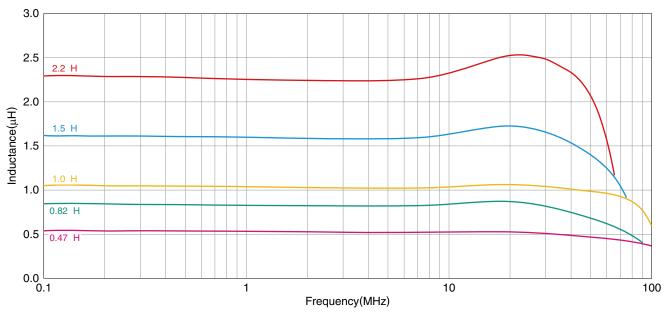


Measurement equipment

Product No.			Manufacturer	
4294A+16034G			Keysight Technologies	
				_

* Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

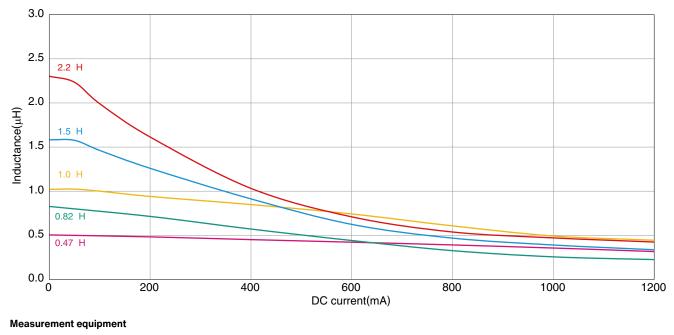


Product No. Manufacturer

4285A+42841A+42842C+42851-61100 Keysight Technologies

* Equivalent measurement equipment may be used.

MLP2012 type (S characteristic product, T dimension of the product 1.0mm max.)

L FREQUENCY CHARACTERISTICS

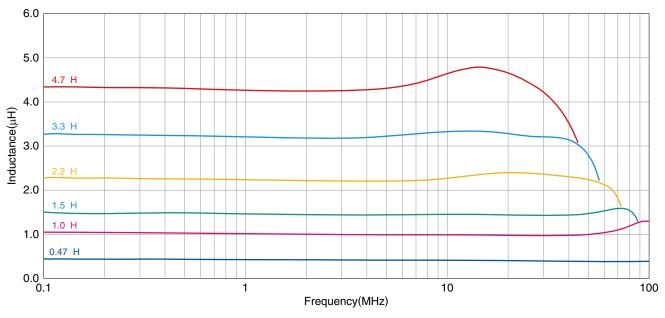


Measurement equipment

Product No.	Manufacturer
4294A+16034G	Keysight Technologies

* Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

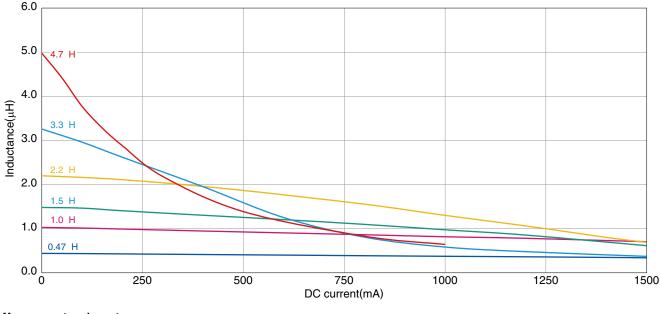

Measurement equipment

Product No.	Manufacturer
-------------	--------------

⁴²⁸⁵A+42841A+42842C+42851-61100 Keysight Technologies


* Equivalent measurement equipment may be used.

公TDK


MLP2012 type

SHAPE & DIMENSIONS

t=0.55mm max




t=1.0mm max




Dimensions in mm

RECOMMENDED LAND PATTERN




Dimensions in mm

RECOMMENDED REFLOW PROFILE

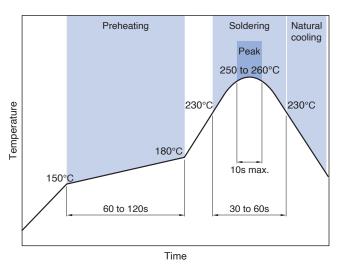


PACKAGING STYLE

REEL DIMENSIONS

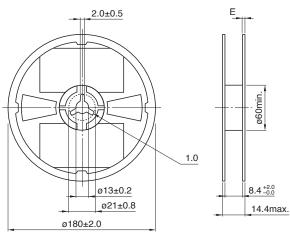


Dimensions in mm

TAPE DIMENSIONS

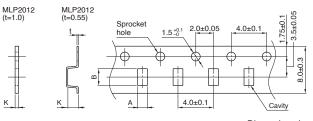

Dimensions in mm

Туре		А	В	К
MLP2012	t=0.55	1.60±0.10	2.40±0.10	0.75±0.10
	t=1.0	1.50±0.10	2.30±0.10	1.1max

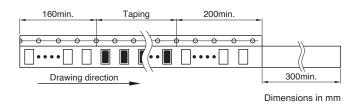

PACKAGE QUANTITY

Package quantity 4000 pcs/reel

TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Туре	Operating temperature range *	tomnoraturo rango	Individual weight	
t=0.55mm	–40 to +125 °C	–40 to +85 °C	7 mg	
t=1.0mm	–40 to +125 °C	–40 to +85 °C	10 mg	
* Operating temperature range includes self-temperature rise				

* Operating temperature range includes self-temperature rise.** The storage temperature range is for after the assembly.

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

(8/9)

20231128

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products

REMINDERS

The storage period is within 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).

If the storage period elapses, the soldering of the terminal electrodes may deteriorate.

- OD not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Owhen embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Ocarefully lay out the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference.
- Ouse a wrist band to discharge static electricity in your body through the grounding wire.
- Obo not expose the products to magnets or magnetic fields.
- Ob not use for a purpose outside of the contents regulated in the delivery specifications.
- OThe products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/ or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

(1) Aerospace/aviation equipment

- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment

- (7) Transportation control equipment
- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

(9/9)