



1960 MHz Ceramic Band Pass Filter



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AM1960B1666

Electrical Specifications

Center Frequency: 1960 MHz
Bandwidth: Fo ± 30 MHz
Insertion Loss: 3.5 dB Max
Ripple in BW: 2.0 dB Max
Return Loss: 15.0 dB Min
Attenuation: >50 dB @ DC~1850 MHz
>40 dB @ 1850~1910 MHz
>30 dB @ 2010~2300 MHz
Input Power: 5.0 W Max


Mechanical

Mounting Method: SMT
Dimensions: 42.0 x 17.0 x 9.5 mm

Environmental

Operating Temperature: -40 to +85° C

Outline Drawing:

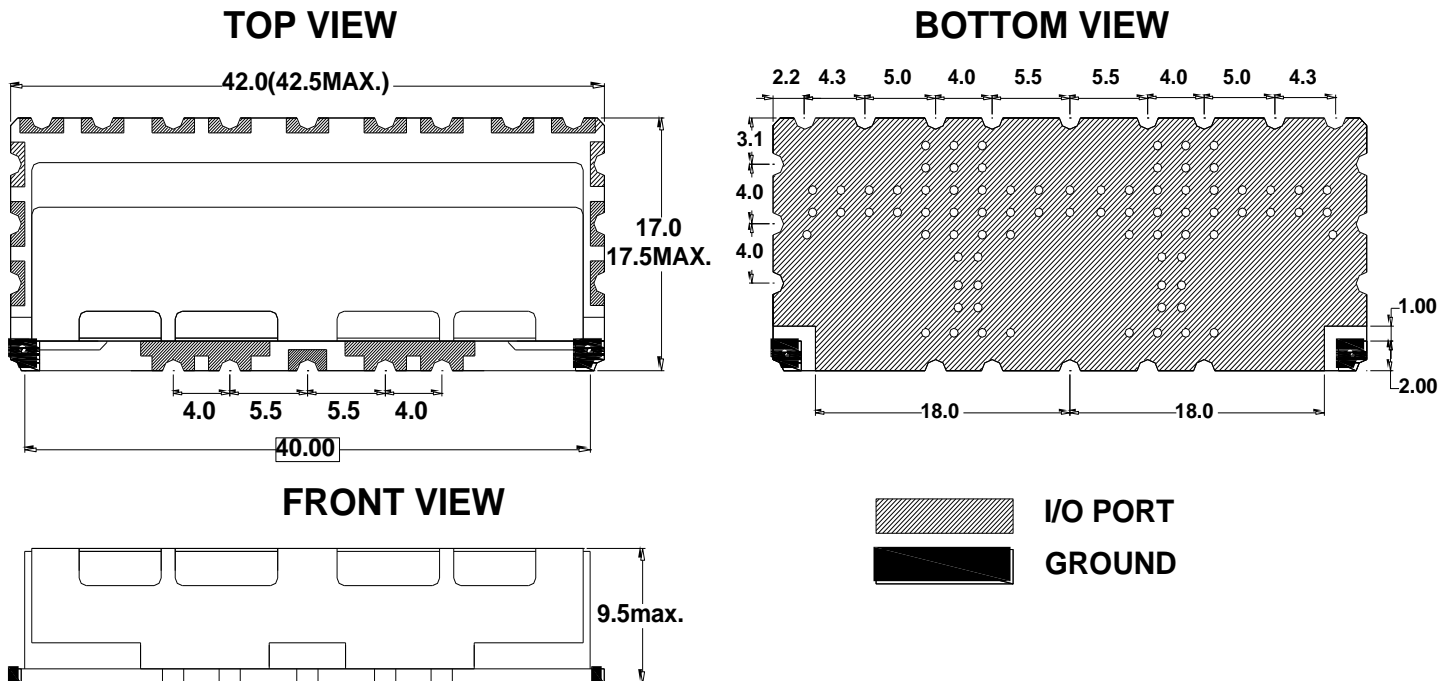




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1960 MHz Ceramic Band Pass Filter

Part Number: AM1960B1666



PCB Layout:

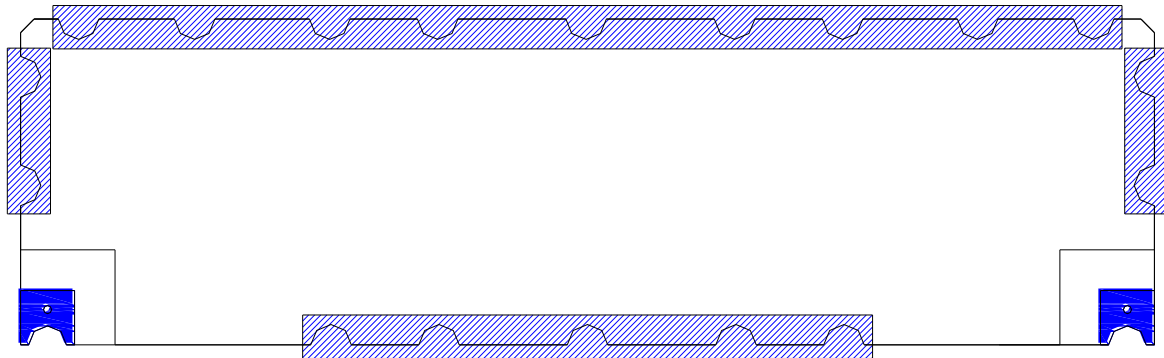

 GROUND SOLDERING POINT
 I/O PORT SOLDERING POINT



1960 MHz Ceramic Band Pass Filter

Part Number: AM1960B1666



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

F YgdcbgY'D`ch

