



Product Name: Castle patch antenna with EVB - EVB+PB50DMS

Part Number: H2BDAE1A2T0100

Features:

- Supporting (L1+L5) GPS/GLONASS/BDS/Galileo/QZSS/IRNSS
- Stable and reliable in performances
- Low temperature coefficient of frequency
- RoHS 2.0 compliance

Applications:

- Automotive telematics
- Safety of life transportation
- Marine
- Navigation

Castle patch antenna with EVB

MODEL: EVB+PB50DMS

Version: D


I. Patch Antenna Specifications:

Items	Specifications	
Navigation	GPS L1/ GLONASS G1/ Galileo E1/ BDS B1/ QZSS L1	GPS L5 Galileo E5a/ BDS B2/ QZSS L5 IRNSS L5
Center Frequency (MHz)	1575.42	1176.45
Peak Gain(dBi)	5.3 Typ.	6.3 Typ.
Return loss (dB)	< -10 Typ.	
Axial Ratio (dB)	< 3 Typ.	
Average Gain(dB)	-1.8 Typ.	-0.8 Typ.
Efficiency (%)	66 Typ.	83 Typ.
Impedance(Ω)	50	
Polarization	RHCP	

Environmental Conditions	
Operation & Storage Temperature (°C)	-40 ~ +85
Storage Temperature (°C) (Antenna with packing sealed)	-5 ~ +40
Relative Humidity	10 ~ 70 %

© Unictron Technologies Corp.
All specifications subject to change without notice.

II. Antenna Dimensions (unit: mm):

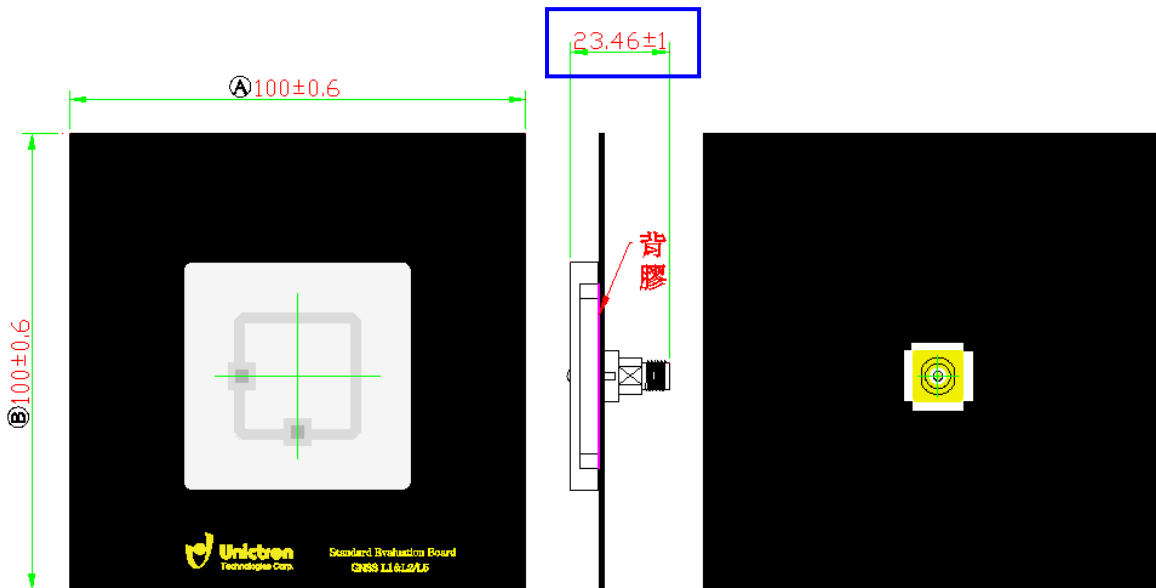


© Unictron Technologies Corp.
All specifications subject to change without notice.

NOTE:

1. All materials are RoHS 2.0 compliant.
2. "A~B" Critical Dimensions.
3. "()" Reference Dimensions.


III. Block Diagram

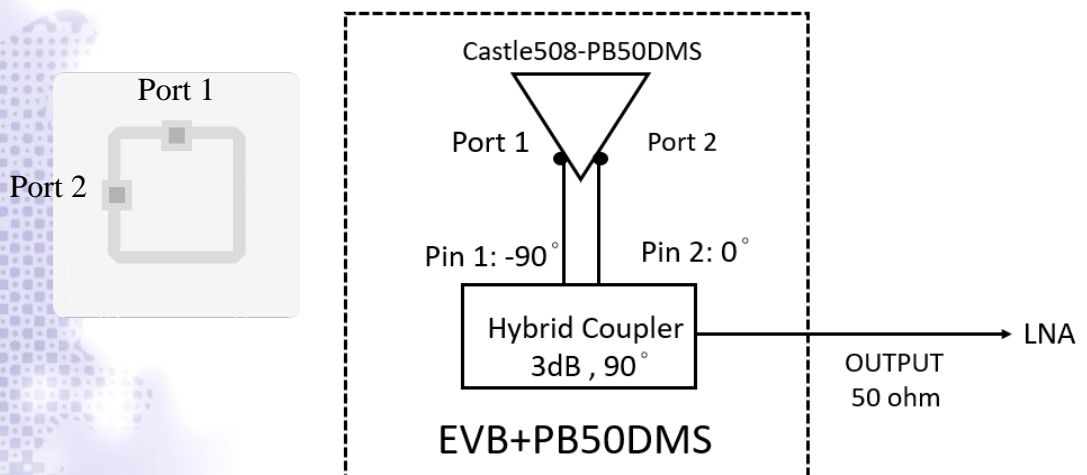


IV. Properties:

a) Return loss (dB) (with coupler)

I. GNSS L1 Band

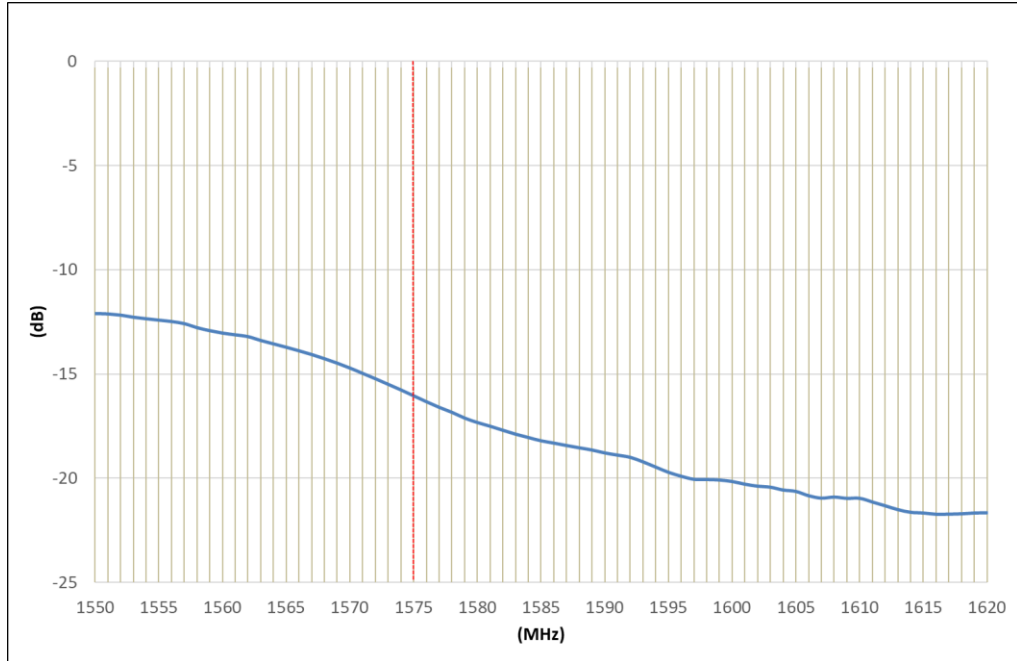


II. GNSS L5 Band

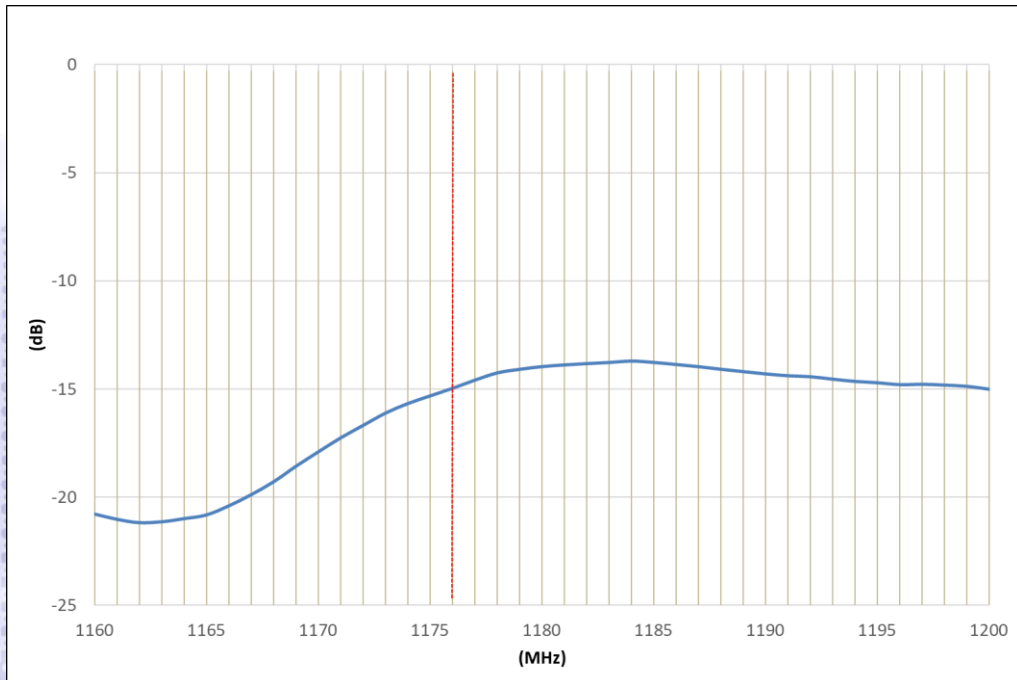


b) Peak Gain vs. Frequency (with coupler)

I. GNSS L1 Band

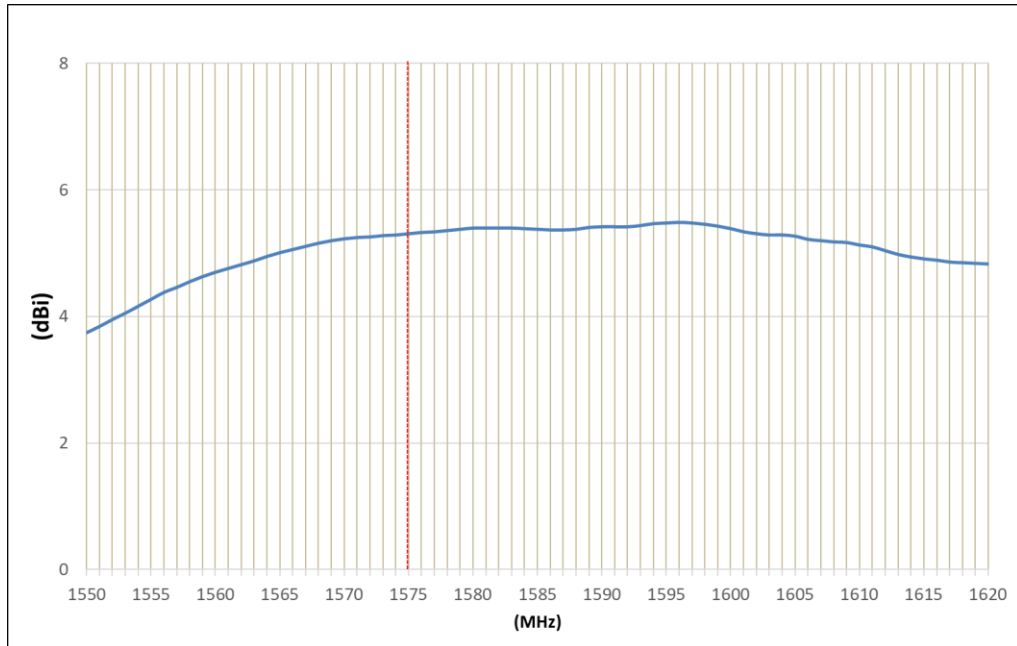


II. GNSS L5 Band

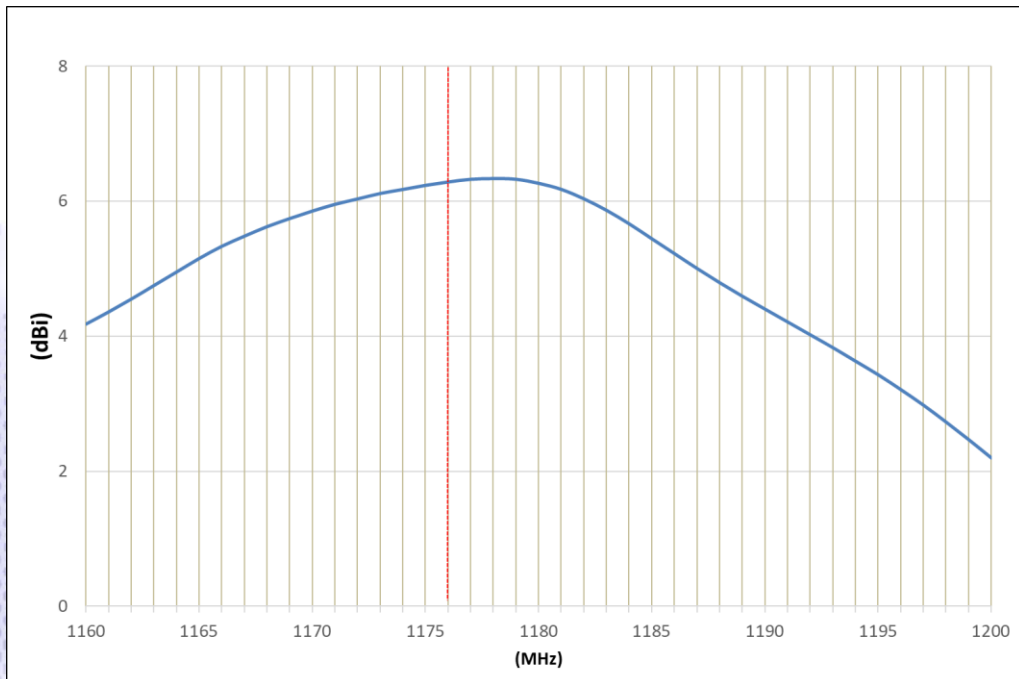


© Unictron Technologies Corp.
All specifications subject to change without notice.

c) Axial vs. Frequency (with coupler)

I. GNSS L1 Band

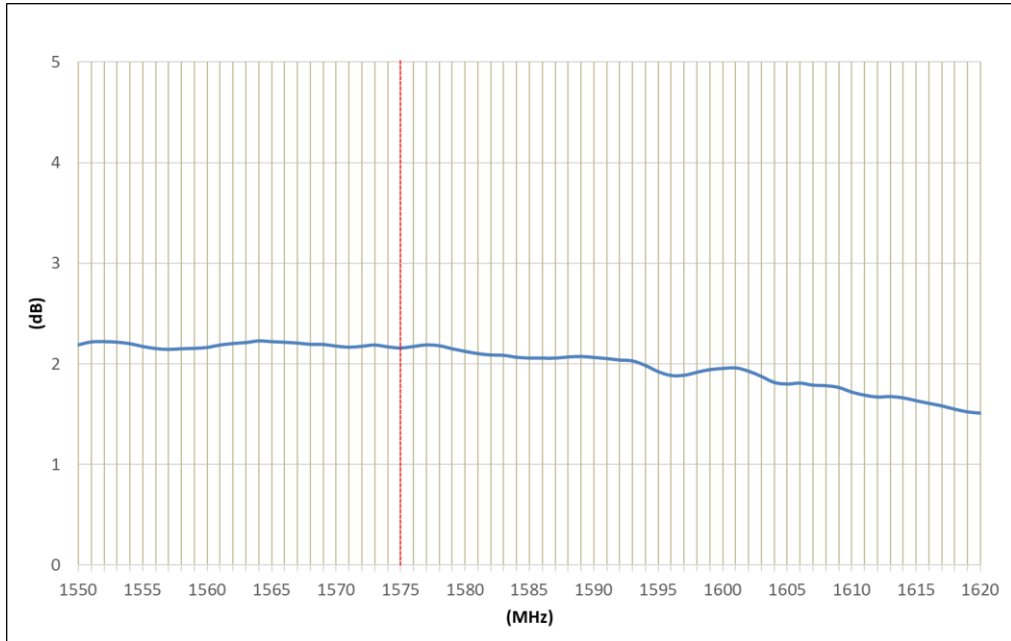

II. GNSS L5 Band

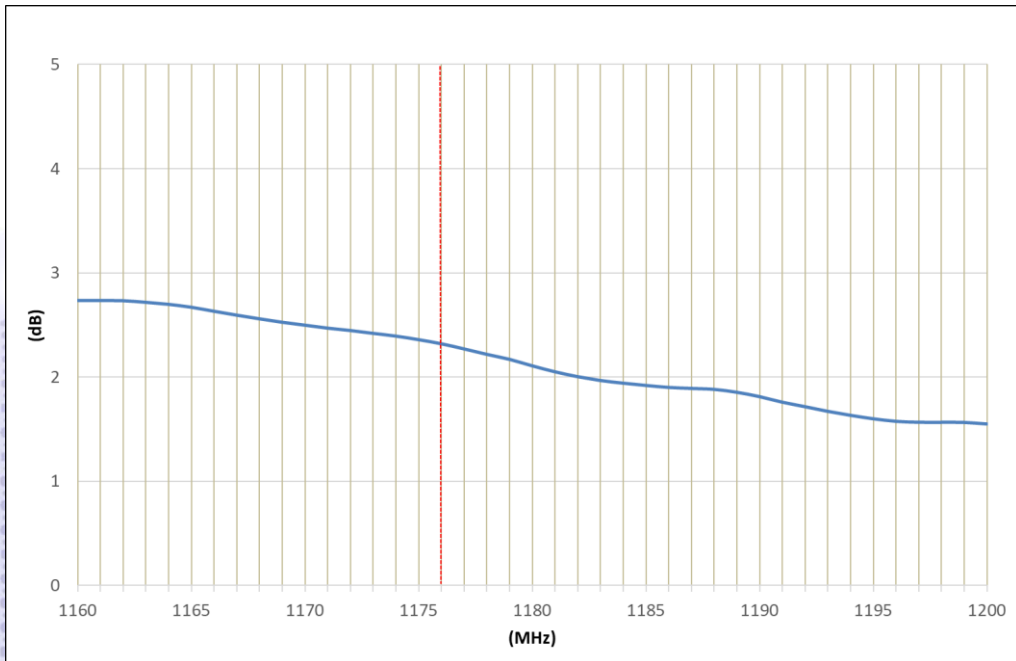


© Unictron Technologies Corp.
All specifications subject to change without notice.

d) Average Gain(dB) (with coupler)

I. GNSS L1 Band




II. GNSS L5 Band

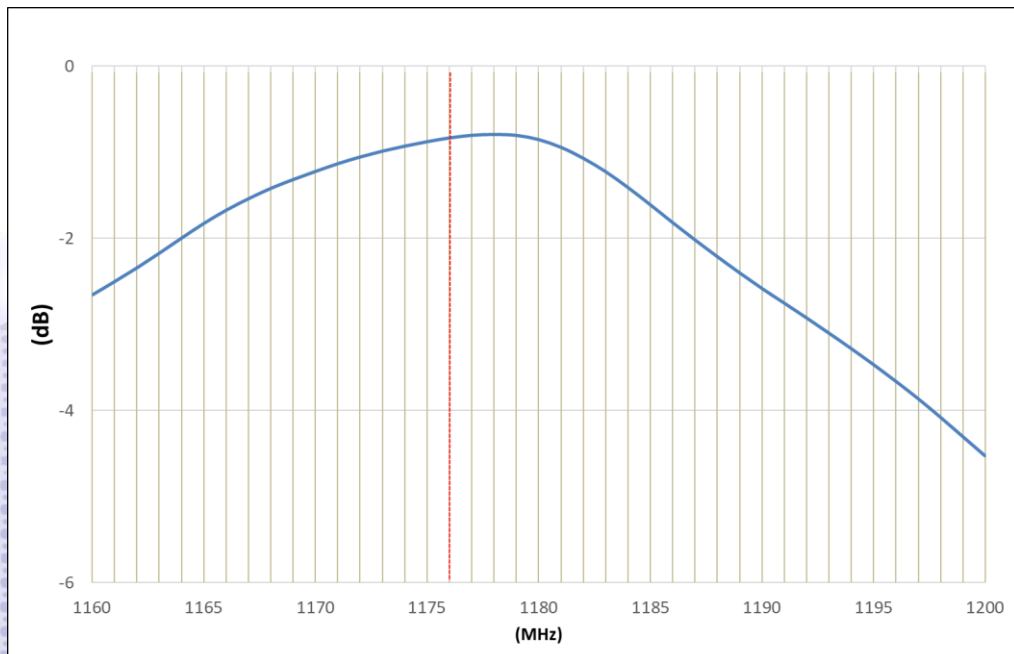


© Unictron Technologies Corp.
All specifications subject to change without notice.

e) Efficiency (%) (with coupler)

I. GNSS L1 Band

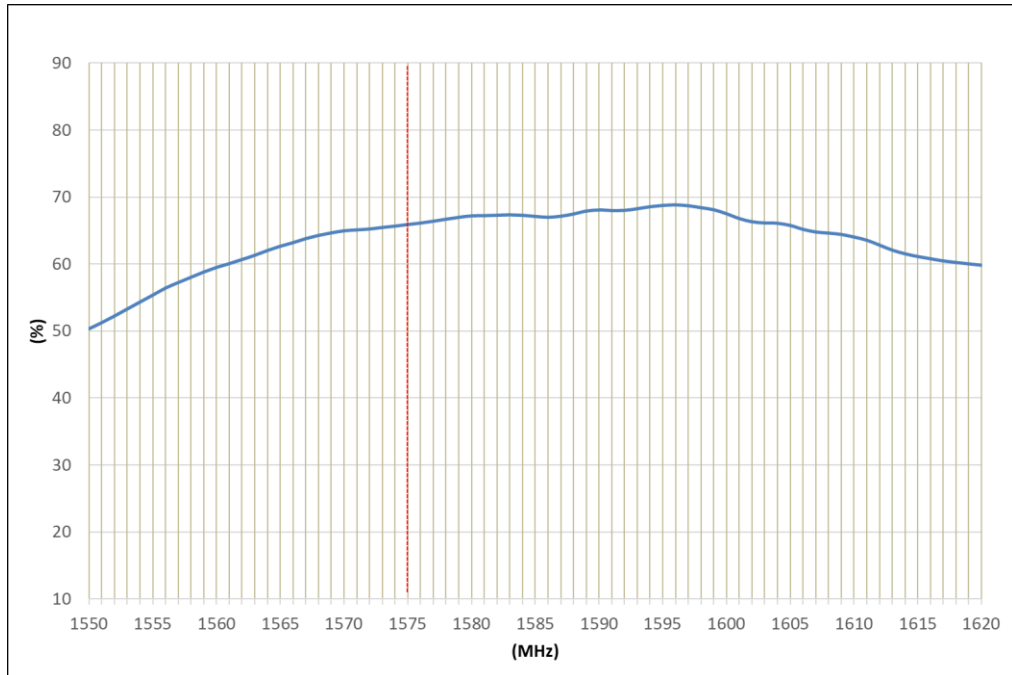

II. GNSS L5 Band

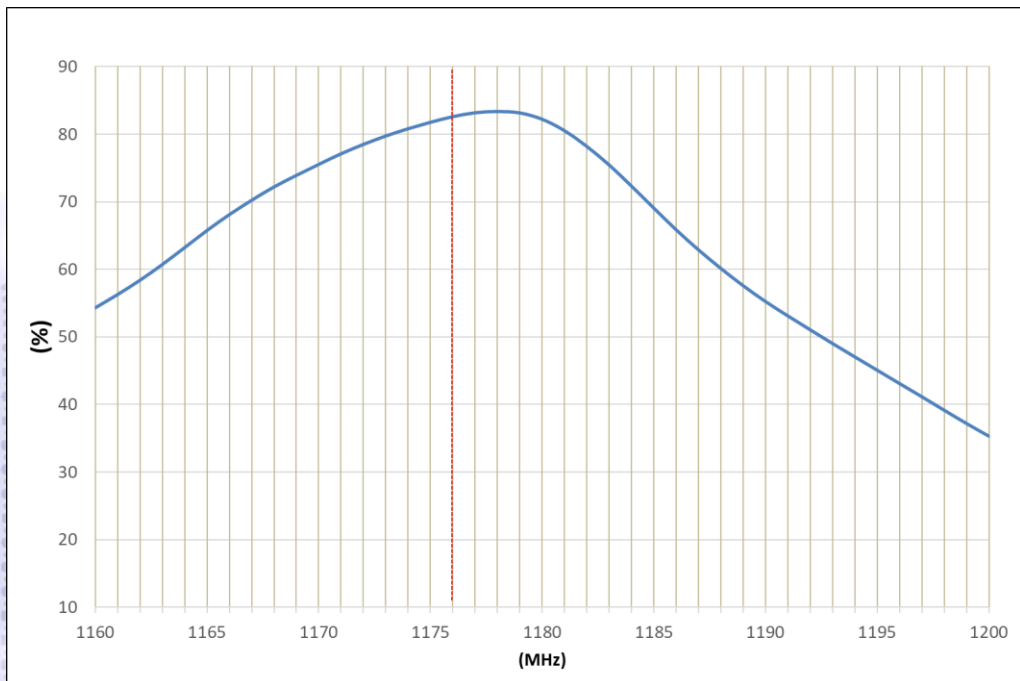

© Unictron Technologies Corp.
All specifications subject to change without notice.


V. Antenna Radiation Pattern Measurement:

The antenna radiation patterns are measured in Unictron's 3D Anechoic Chamber. The measurement setup is as show below.




© Unictron Technologies Corp.
All specifications subject to change without notice.


2D Radiation Gain Pattern

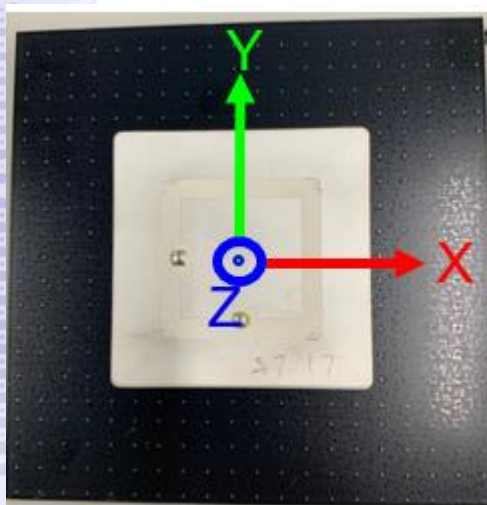

a) GNSS L1 Band @1575.42MHz (unit: dBi)

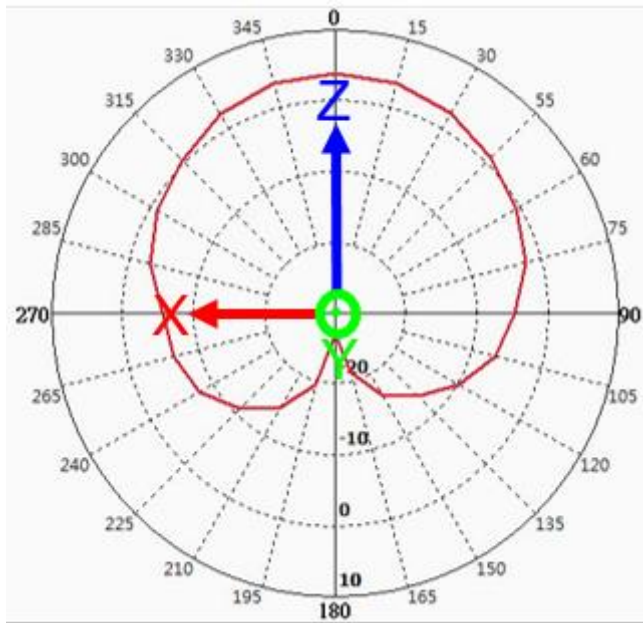



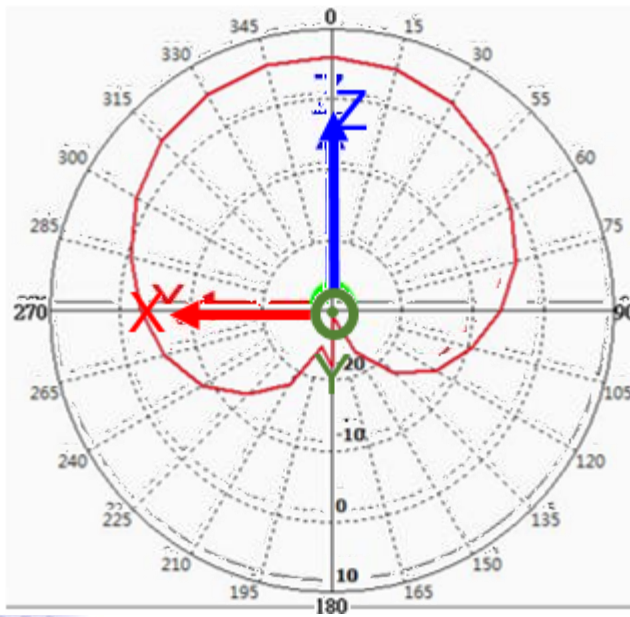


b) GNSS L5 Band @1176.45MHz (unit: dBi)



VI. Packing

- a) Weight:
Unit Weight: 68 ± 5 (g)
- b) Quantity:
Each Pag : 1 pcs
Each outer carton : 50 pcs

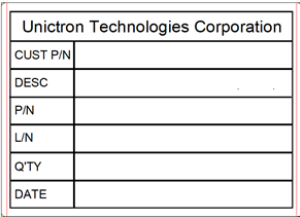Step	Pictures	Descriptions
1		Place product into a double-layered antistatic bubble bag.
2		Place packaged product into a 1.3 cubic-foot carton.
3		Place 25 antistatic double layered bubble bag in an interlace pattern in each layer, with two layers per carton, total 50pcs per carton.
4	 	Seal the carton with packaging tape. Attach label to the top left corner on the side of the carton to complete packaging.

© Unictron Technologies Corp.
All specifications subject to change without notice.