
**Technical Data Sheet** 



RIGHT ANGLE PLUG CRIMP TYPE CABLE 5/50 D



This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

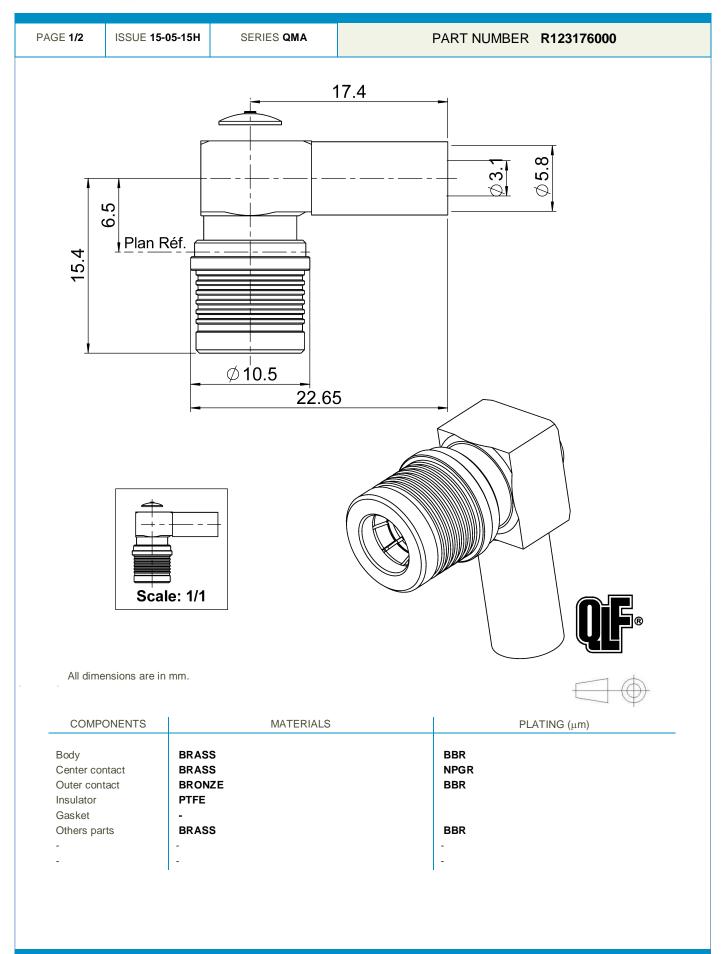

RIGHT ANGLE PLUG CRIMP TYPE CABLE 5/50 D

| PAGE <b>2/2</b>  | ISSUE 15-05-15H | SERIES  | QMA  | F   | PART NUM                     | IBER <b>R</b> 1       | 123176    | 000                  |                 |
|--|-----------------|---|--|---|------------------------------|-----------------------|-----------|----------------------|-----------------|
|  |                 |   | PAC  | CKAGING   |                              |                       |           |                      |                 |
|  | Standard        |   | Unit   | (   | Other                        |                       |           |                      |                 |
|  | 1(              | 0   | Со   | ntact us  | Со                           | ntact us              |           |                      |                 |
| Impedance<br>Frequency<br>VSWR<br>Insertion loss<br>RF leakage<br>Voltage rating<br>Dielectric withstar<br>Insulation resistar |                 | 50 Ω<br>0-6 GHz<br>0.0200 x F(0<br>.05 √F(0<br>*** 80 - F(0 | GHz) Maxi<br>GHz) dB Maxi<br>GHz)) dB Maxi<br>Maxi<br>mini | Operating ter<br>Hermetic sea<br>Panel leakagi<br>i | nperature<br>I<br>e          | NVIRONME<br>SPECIFICA |           | -40/+105<br>NA<br>NA | °C<br>Atm.cm3/s |
| MECHANICAL CHARACTERISTICS   |                 |   |  | CABLE ASSEMBLY                                      |                              |                       |           |                      |                 |
| Center contact ref<br>Axial force – M<br>Axial force – O<br>Torque   | ating End       | 18<br>27<br>NA  | N mini<br>N mini<br>N.cm mini                              |   | a b<br>2 7<br>truction: Crim | с<br>13<br>пр 05      | d<br>0    | е<br>11              | f<br>0          |
| Recommended to<br>Mating<br>Panel nut<br>Clamp nut<br>A/F clamp nut  | rque            | NA<br>NA<br>NA<br>0.0000                                    | N.cm<br>N.cm<br>N.cm<br>mm                                 | Recommende<br>RG 142<br>RG 142 FTX<br>KX 23         | ed cable(s)                  |                       |           |                      |                 |
| Mating life<br>Weight  | 1<br>8.63       | 00 Cycles mi<br>00 g  | ini  | RG 400<br>RG 223                                    |                              |                       |           |                      |                 |
|  |                 |   |  | Characteristics in<br>performance cabl<br>assembly  |                              |                       |           |                      | -               |
|  |                 |   |  | Cable retention                                     | on                           |                       |           |                      |                 |
|  |                 |   |  | - pull off<br>- torque                              |                              |                       | 200<br>NA | N mini<br>N.cm       |                 |

Radiall 狐

## TOOLING

| Part Number | Description               | Hexagon |  |  |
|-------------|---------------------------|---------|--|--|
| R282223000  | CRIMPING TOOL             | 5.41    |  |  |
| R282235011  | CRIMPING DIES M22520/5-11 | 5.41    |  |  |
| R282293000  | CRIMPING TOOL M22520/5-01 |         |  |  |

## **OTHER CHARACTERISTICS**

\*\*Intermod. : <-120dBc at 1.8GHz (2x20W) \*\*\*RF leakage(interface) 3<F<6GHz: >70dB