
Technical Data Sheet

Radiall 狐

300W 0.5-1GHZ 20DB DIRECTIONAL COUPLER

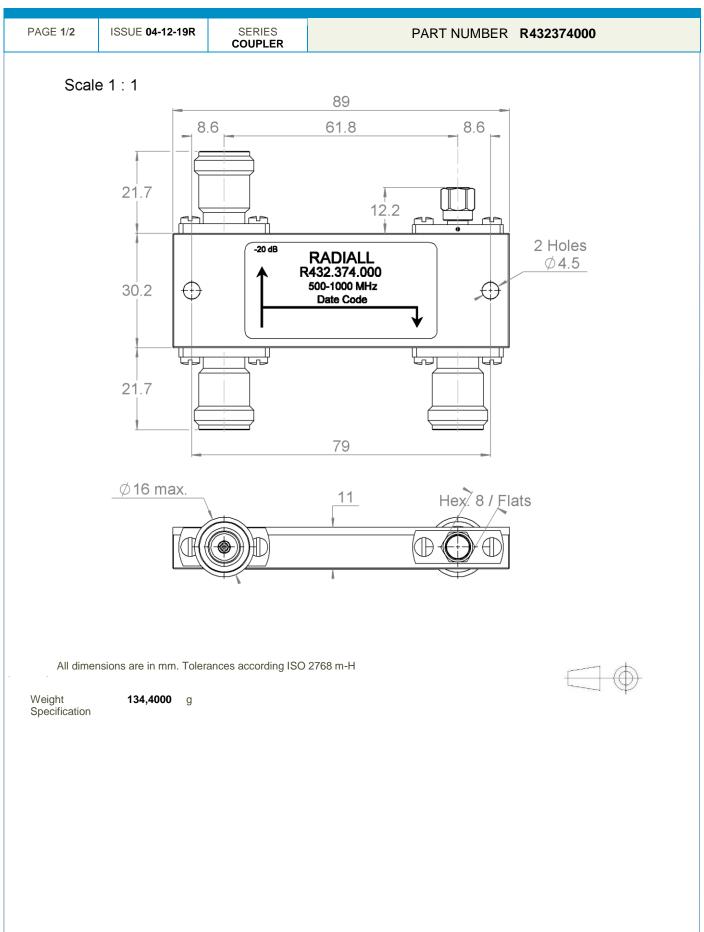

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

Technical Data Sheet



300W 0.5-1GHZ 20DB DIRECTIONAL COUPLER

PAGE 2/2

ISSUE 04-12-19R

SERIES COUPLER

PART NUMBER R432374000

ELECTRICAL CHARACTERISTICS

E i	
Frequency operating range :	0.5 – 1 GHz
Impedance :	50 Ω
VSWR : - Main Line	1.15 max.
- Coupled Line	1.15 max.
Nominal Coupling :	20 dB
Coupling Precision :	$\pm 0.3 \text{ dB}$
Insertion Loss :	0.4 dB max.
Directivity :	23 dB mini
Frequency Sensitivity :	$\pm 0.8 \text{ dB}$
Average Power at 25°C	300W
Peak Power at 25°C	5000W

MECHANICAL CHARACTERISTICS

Connector type :	N female per MIL-C 39012
Coaxial Termination :	SMA 50 Ω, 1W

ENVIRONMENTAL CHARACTERISTICS

Operating temperature :	-25°C / +70°C
Storage temperature :	-25°C / +70°C

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.