
## **Technical Data Sheet**

30W 12.4-18GHZ 3DB HYBRID COUPLER



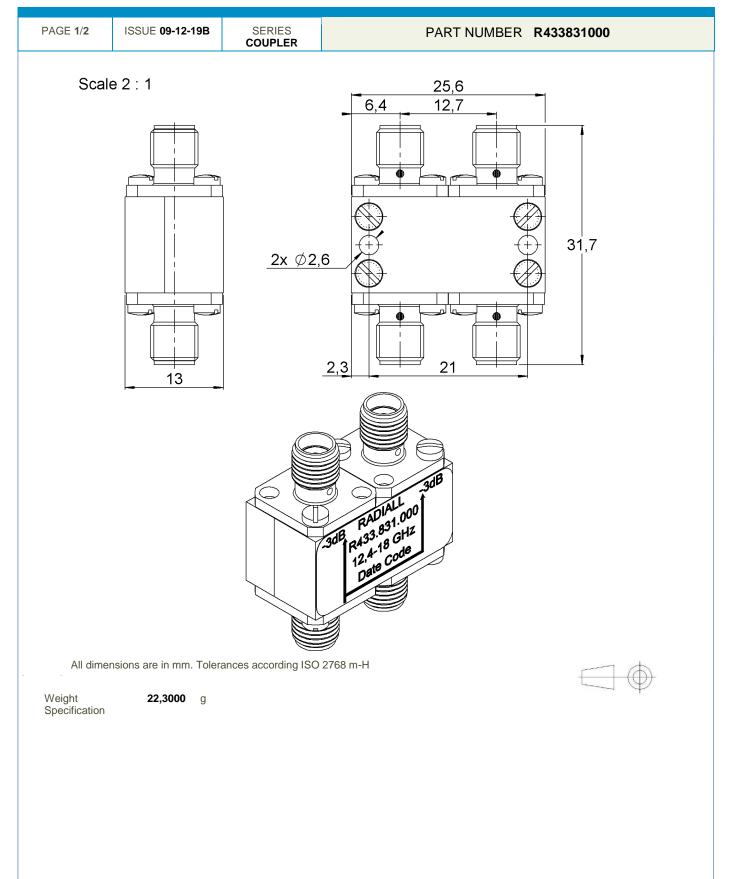

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

**Technical Data Sheet** 

30W 12.4-18GHZ 3DB HYBRID COUPLER



PAGE **2/2** 

ISSUE 09-12-19B

SERIES COUPLER

PART NUMBER R433831000

## **ELECTRICAL CHARACTERISTICS**

Frequency operating range :	12.4 – 18 GHz
Impedance :	50 Ω
VSWR :	1.40 max.
Nominal Coupling :	3 dB
Insertion Loss :	0.6 dB max.
Isolation :	16 dB mini
Amplitude Balance :	$\pm 0.7 \text{ dB}$
Phase Balance :	90° ±6°
Average Power at 25°C	30W
Peak Power at 25°C	3000W

## **MECHANICAL CHARACTERISTICS**

Connector type : SMA female per MIL-C 39012

## **ENVIRONMENTAL CHARACTERISTICS**

Operating temperature :	-40°C/+100°C
Storage temperature :	-40°C / +100°C

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.