

## Features

- 3-State output
- 3V and 5V input compatible
- Clocking speeds up to 10 MHz
- 20 ns Switching/delay time
- 2A Peak drive
- Low, matched output impedance—5 $\Omega$
- Low quiescent current—2.5 mA
- Wide operating voltage—4.5V–16V

## Applications

- Parallel bus line drivers
- EPROM and PROM programming
- Motor controls
- Charge pumps
- Sampling circuits
- Pin drivers
- Bridge circuits

## Ordering Information

Part No.	Temp. Range	Pkg.	Outline #
EL7232CN	-40°C to +85°C	8-Pin P-DIP	MDP0031
EL7232CS	-40°C to +85°C	8-Pin SO	MDP0027


## Truth Table

3-State	Input	Output
1	0	1
1	1	0
0	0	Open
0	1	Open

## General Description

The EL7232C 3-state drivers are particularly well suited for ATE and microprocessor based applications. The low quiescent power dissipation makes this part attractive in battery applications. The 2A peak drive capability, makes the EL7232C an excellent choice when driving high speed capacitive lines, as well. The input circuitry provides level shifting from TTL levels to the supply rails. The EL7232C is available in 8-pin P-DIP and 8-lead SO packages.

## Connection Diagram

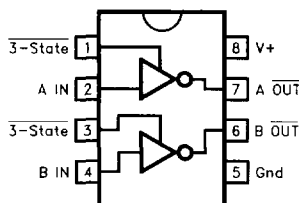

7232-1

## Dual Channel, High Speed, High Current Line Driver w/3-State

### Absolute Maximum Ratings

Supply (V+ to Gnd)	16.5V	Operating Junction Temperature	125°C
Input Pins	-0.3V to +0.3V above V+	Power Dissipation	
Combined Peak Output Current	4A	SOIC	570 mW
Storage Temperature Range	-65°C to +150°C	PDIP	1050 mW
Ambient Operating Temperature	-40°C to +85°C		

#### Important Note:

All parameters having Min/Max specifications are guaranteed. The Test Level column indicates the specific device testing actually performed during production and Quality inspection. Elantec performs most electrical tests using modern high-speed automatic test equipment, specifically the LTX77 Series system. Unless otherwise noted, all tests are pulsed tests, therefore  $T_J = T_C = T_A$ .

Test Level	Test Procedure
I	100% production tested and QA sample tested per QA test plan QCX0002.
II	100% production tested at $T_A = 25^\circ\text{C}$ and QA sample tested at $T_A = 25^\circ\text{C}$ , $T_{MAX}$ and $T_{MIN}$ per QA test plan QCX0002.
III	QA sample tested per QA test plan QCX0002.
IV	Parameter is guaranteed (but not tested) by Design and Characterization Data.
V	Parameter is typical value at $T_A = 25^\circ\text{C}$ for information purposes only.

### DC Electrical Characteristics $T_A = 25^\circ\text{C}$ , $V = 15\text{V}$ unless otherwise specified

Parameter	Description	Test Conditions	Min	Typ	Max	Test Level	Units
<b>Input</b>							
$V_{IH}$	Logic "1" Input Voltage		2.4			I	V
$I_{IH}$	Logic "1" Input Current	@V+		0.1	10	I	$\mu\text{A}$
$V_{IL}$	Logic "0" Input Voltage				0.8	I	V
$I_{IL}$	Logic "0" Input Current	@0V		0.1	10	I	$\mu\text{A}$
$V_{HVS}$	Input Hysteresis			0.3		V	V
<b>Output</b>							
$R_{OH}$	Pull-Up Resistance	$I_{OUT} = -100\text{ mA}$		3	6	I	$\Omega$
$R_{OL}$	Pull-Down Resistance	$I_{OUT} = +100\text{ mA}$		4	6	I	$\Omega$
$I_{OFF}$	3-State Output Leakage	$V_{OUT} = V^+$ $V_{OUT} = 0\text{V}$	0.2		10	I	$\mu\text{A}$
$I_{PK}$	Peak Output Current	Source Sink		2.0 2.0		IV	A
$I_{DC}$	Continuous Output Current	Source/Sink	100			I	mA
<b>Power Supply</b>							
$I_S$	Power Supply Current	Inputs High		1	2.5	I	mA
$V_S$	Operating Voltage		4.5		16	I	V


# EL7232C

## Dual Channel, High Speed, High Current Line Driver w/3-State

### AC Electrical Characteristics $T_A = 25^\circ\text{C}$ , $V = 15\text{V}$ unless otherwise specified


Parameter	Description	Test Conditions	Min	Typ	Max	Test Level	Units
<b>Switching Characteristics</b>							
$t_R$	Rise Time	$C_L = 500\text{ pF}$ $C_L = 1000\text{ pF}$		7.5 10		IV	ns
$t_F$	Fall Time	$C_L = 500\text{ pF}$ $C_L = 1000\text{ pF}$		10 13	20	IV	ns
$t_{D-ON}$	Turn-On Delay Time			18	25	IV	ns
$t_{D-OFF}$	Turn-Off Delay Time			20	25	IV	ns

Timing Table

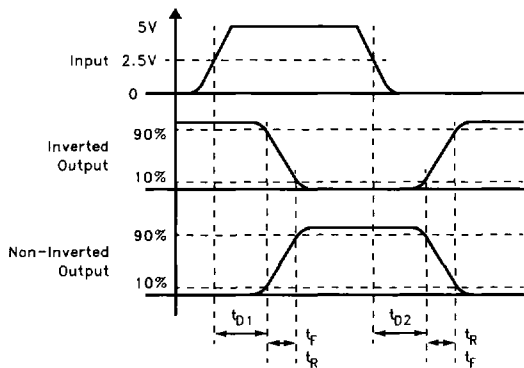


7232-2

Standard Test Configuration

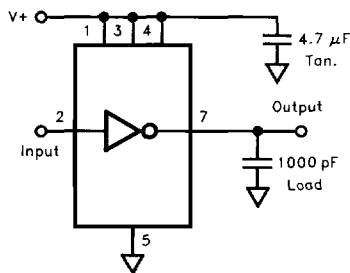

7232-3


Simplified Schematic

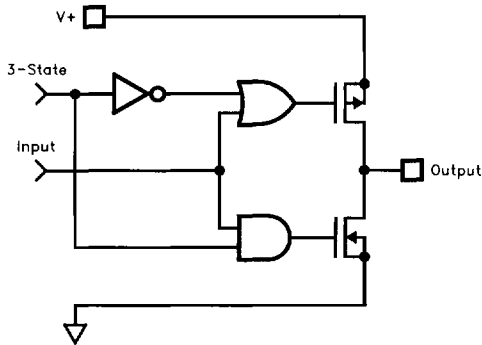

7232-4


### Typical Performance Curve

Max Power/Derating Curves

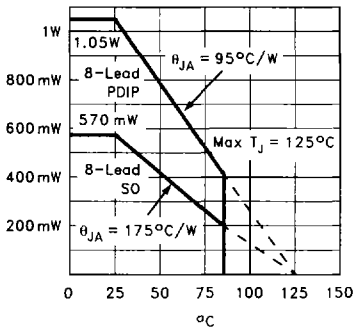


7232-6

Switch Threshold vs Supply Voltage

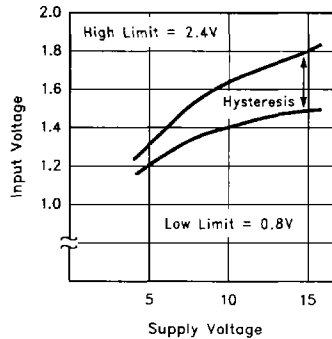


7232-7

Input Current vs Voltage

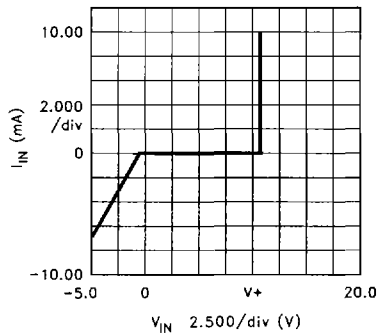


7232-8

Peak Drive vs Supply Voltage

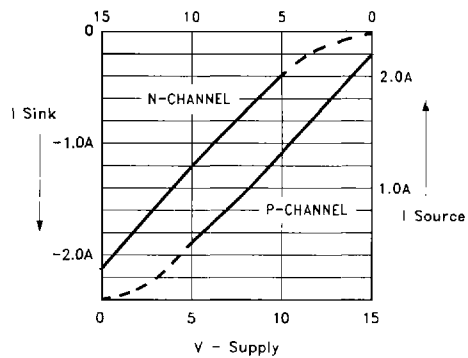

7232-9

Quiescent Supply Current

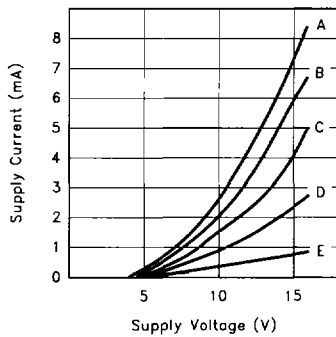


CASE:

- |   |                |
|---|----------------|
| A | ALL INPUTS GND |
| B | 3 INPUTS GND   |
| C | 2 INPUTS GND   |
| D | 1 INPUTS GND   |
| E | ALL INPUTS V+  |

7232-10

"ON" Resistance vs Supply Voltage

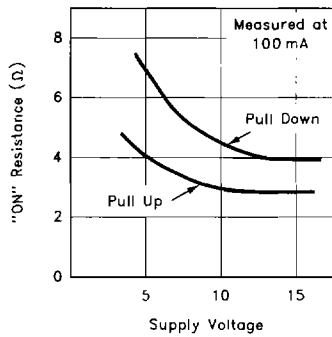


7232-17


# EL7232C

## Dual Channel, High Speed, High Current Line Driver w/3-State


### Typical Performance Curve — Contd.

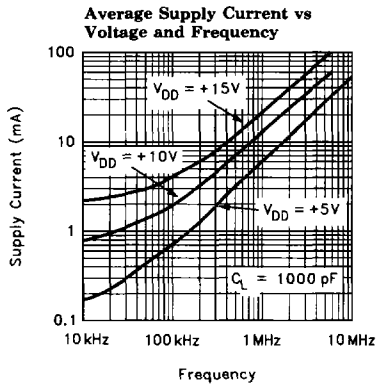


7232-11

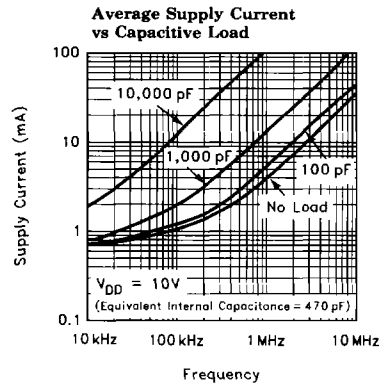

7232-12

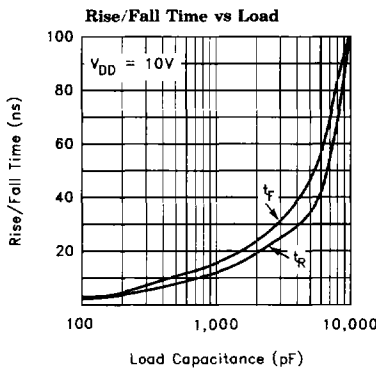


7232-5

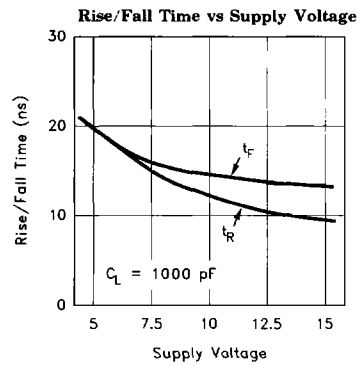


7232-13

## Dual Channel, High Speed, High Current Line Driver w/3-State


### Typical Performance Curve — Contd.

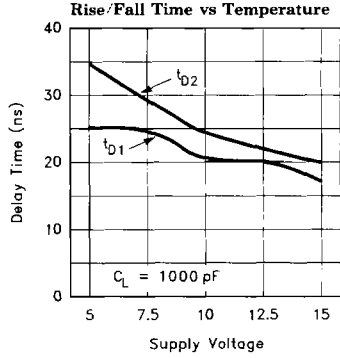

7232-14

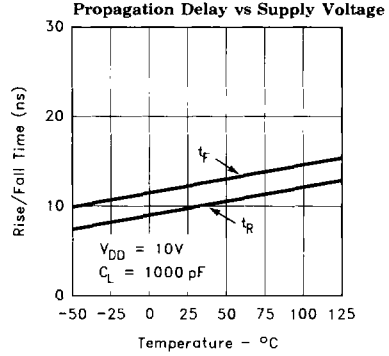

7232-15

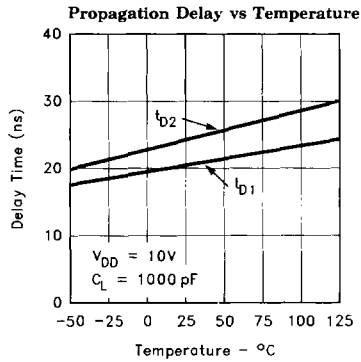

7232-16