General Purpose Transistors

PNP Silicon

Features

- S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector – Emitter Voltage	V_{CEO}	-60	Vdc
Collector - Base Voltage	V _{CBO}	-60	Vdc
Emitter-Base Voltage	V _{EBO}	-5.0	Vdc
Collector Current – Continuous	Ic	-600	mAdc
Collector Current – Peak (Note 3)	I _{CM}	-1200	mAdc

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation – FR–5 Board (Note 1) @T _A = 25°C Derate above 25°C	P _D	225 1.8	mW mW/°C
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	556	°C/W
Total Device Dissipation – Alumina Substrate, (Note 2) @T _A = 25°C Derate above 25°C	P _D	300 2.4	mW mW/°C
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	417	°C/W
Total Device Dissipation – Heat Spreader or equivalent, (Note 4) @T _A = 25°C	P _D	350	mW
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	357	°C/W
Junction and Storage Temperature	T _J , T _{stg}	-55 to +150	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. $FR-5 = 1.0 \times 0.75 \times 0.062$ in.
- 2. Alumina = 0.4 \times 0.3 \times 0.024 in. 99.5% alumina.
- 3. Reference SOA curve.
- 4. Heat Spreader or equivalent = 450 mm², 2 oz.



ON Semiconductor®

www.onsemi.com





SOT-23 (TO-236AB) CASE 318 STYLE 6

MARKING DIAGRAM



2F = Device Code M = Date Code* • = Pb-Free Package

(Note: Microdot may be in either location)
*Date Code orientation and/or overbar may vary depending upon manufacturing location.

ORDERING INFORMATION


Device	Package	Shipping [†]
MMBT2907ALT1G	SOT-23	3000 / Tape &
SMMBT2907ALT1G	(Pb-Free)	Reel
MMBT2907ALT3G	SOT-23	10,000 / Tape &
SMMBT2907ALT3G	(Pb-Free)	Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Charac	teristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS		·		-L	1
Collector-Emitter Breakdown Voltage (No $(I_C = -1.0 \text{ mAdc}, I_B = 0)$ $(I_C = -10 \text{ mAdc}, I_B = 0)$	te 5)	V _{(BR)CEO}	-60 -60	- -	Vdc
Collector – Base Breakdown Voltage (I _C :	= -10 μAdc, I _E = 0)	V _{(BR)CBO}	-60	-	Vdc
Emitter – Base Breakdown Voltage (I _E = -	-10 μAdc, I _C = 0)	V _{(BR)EBO}	-5.0	-	Vdc
Collector Cutoff Current (V _{CE} = −30 Vdc,	$V_{EB(off)} = -0.5 \text{ Vdc}$	I _{CEX}	-	-50	nAdc
Collector Cutoff Current $(V_{CB} = -50 \text{ Vdc}, I_E = 0)$ $(V_{CB} = -50 \text{ Vdc}, I_E = 0, T_A = 125^{\circ}\text{C})$		I _{CBO}	- -	-0.010 -10	μAdc
Base Cutoff Current (V _{CE} = -30 Vdc, V _{EI}	$B_{\text{Off}} = -0.5 \text{ Vdc}$	I _{BL}	-	-50	nAdc
ON CHARACTERISTICS					
DC Current Gain $ \begin{aligned} &(I_C = -0.1 \text{ mAdc}, V_{CE} = -10 \text{ Vdc}) \\ &(I_C = -1.0 \text{ mAdc}, V_{CE} = -10 \text{ Vdc}) \\ &(I_C = -10 \text{ mAdc}, V_{CE} = -10 \text{ Vdc}) \\ &(I_C = -150 \text{ mAdc}, V_{CE} = -10 \text{ Vdc}) \\ &(I_C = -500 \text{ mAdc}, V_{CE} = -10 \text{ Vdc}) \end{aligned} $	te 5)	h _{FE}	75 100 100 100 50	- - 300 -	-
Collector – Emitter Saturation Voltage (Not $(I_C = -150 \text{ mAdc}, I_B = -15 \text{ mAdc})$ (Not $(I_C = -500 \text{ mAdc}, I_B = -50 \text{ mAdc})$,	V _{CE(sat)}		-0.4 -1.6	Vdc
Base – Emitter Saturation Voltage (Note $(I_C = -150 \text{ mAdc}, I_B = -15 \text{ mAdc})$ $(I_C = -500 \text{ mAdc}, I_B = -50 \text{ mAdc})$	5)	V _{BE(sat)}	- -	-1.3 -2.6	Vdc
SMALL-SIGNAL CHARACTERISTICS				•	•
Current – Gain – Bandwidth Product (Not (I _C = –50 mAdc, V _{CE} = –20 Vdc, f = 10		f _T	200	_	MHz
Output Capacitance (V _{CB} = -10 Vdc, I _E :	= 0, f = 1.0 MHz)	C _{obo}	-	8.0	pF
Input Capacitance (V _{EB} = -2.0 Vdc, I _C = 0, f = 1.0 MHz)		C _{ibo}	_	30	
SWITCHING CHARACTERISTICS					
Turn-On Time		t _{on}	ı	45	
Delay Time	$(V_{CC} = -30 \text{ Vdc}, I_{C} = -150 \text{ mAdc}, I_{B1} = -15 \text{ mAdc})$	t _d	_	10	
Rise Time	,	t _r	_	40	no
Turn-Off Time		t _{off}	-	100	ns
Storage Time	$(V_{CC} = -6.0 \text{ Vdc}, I_C = -150 \text{ mAdc}, I_{B1} = I_{B2} = -15 \text{ mAdc})$	t _s	_	80	
Fall Time	.61 – .62 – .0 (00)	t _f	-	30	

- 5. Pulse Test: Pulse Width $\leq 300 \,\mu\text{s}$, Duty Cycle $\leq 2.0\%$.
- 6. f_T is defined as the frequency at which $|h_{fe}|$ extrapolates to unity.

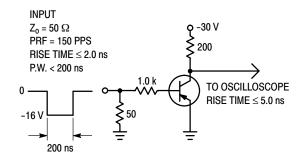



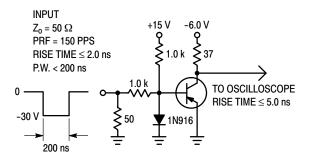


Figure 2. Storage and Fall Time Test Circuit

TYPICAL CHARACTERISTICS

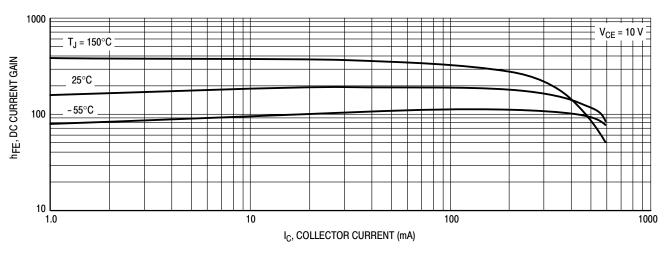


Figure 3. DC Current Gain

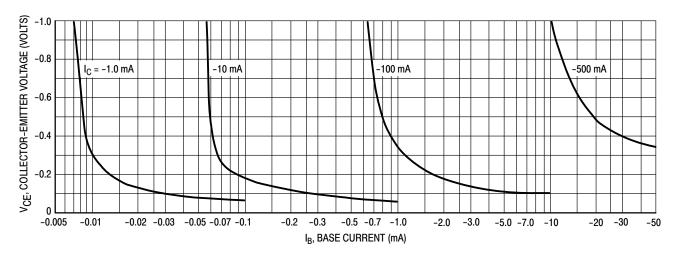


Figure 4. Collector Saturation Region

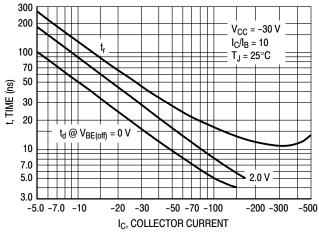


Figure 5. Turn-On Time


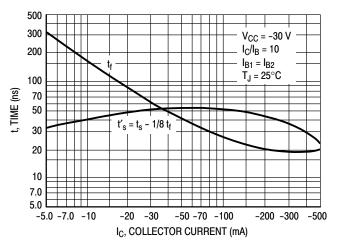


Figure 6. Turn-Off Time

TYPICAL SMALL-SIGNAL Characteristics NOISE FIGURE


 $V_{CE} = 10 \text{ Vdc}, T_A = 25^{\circ}\text{C}$

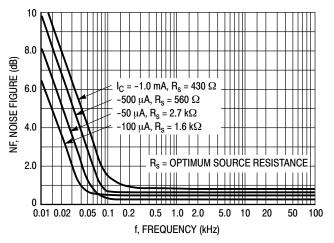

8.0 NF, NOISE FIGURE (dB) 6.0 $I_C = -50 \mu A$ -100 μA -500 μA 4.0 1.0 mA 2.0 100 200 2.0 k 50 k **5**0 1.0 k 5.0 k 10 k 20 k R_s, SOURCE RESISTANCE (OHMS)

Figure 7. Frequency Effects

Figure 8. Source Resistance Effects

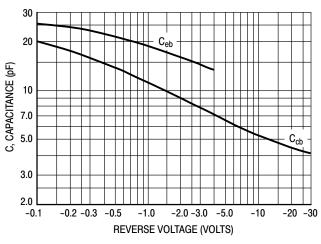

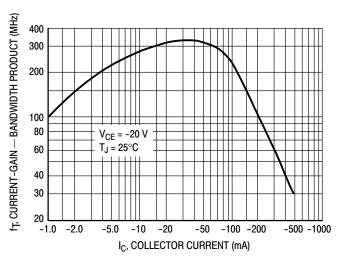
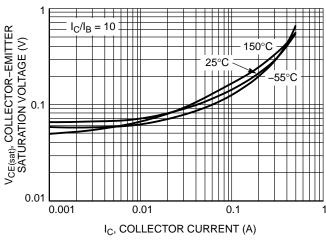


Figure 9. Capacitances

Figure 10. Current-Gain - Bandwidth Product




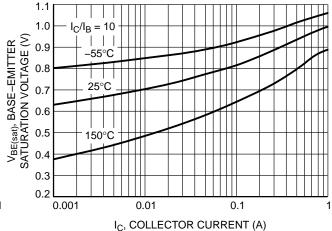


Figure 11. Collector Emitter Saturation Voltage vs. Collector Current

Figure 12. Base Emitter Saturation Voltage vs.
Collector Current

TYPICAL SMALL-SIGNAL Characteristics NOISE FIGURE

 V_{CE} = 10 Vdc, T_A = 25°C

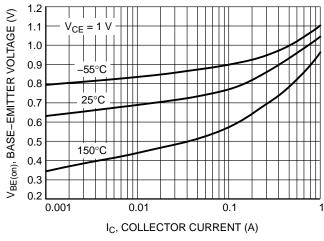

+0.5

0

R₀VC for V_{CE(sat)}

-1.5

-2.0

R₀VB for V_{BE}

-2.5

-0.1 -0.2 -0.5 -1.0 -2.0 -5.0 -10 -20 -500

I_C, COLLECTOR CURRENT (mA)

Figure 13. Base Emitter Voltage vs. Collector Current

Figure 14. Temperature Coefficients

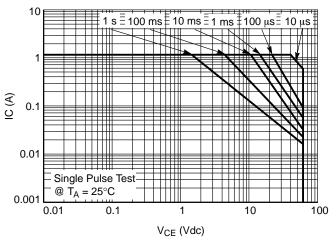


Figure 15. Safe Operating Area

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales