General Purpose Transistor

PNP Silicon

Features

- S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS

| Rating | Symbol | Value | Unit |
|-----------------------------------|------------------|-------|------|
| Collector - Emitter Voltage | V _{CEO} | -40 | Vdc |
| Collector - Base Voltage | V _{CBO} | -40 | Vdc |
| Emitter-Base Voltage | V _{EBO} | -5.0 | Vdc |
| Collector Current – Continuous | Ic | -200 | mAdc |
| Collector Current – Peak (Note 3) | I _{CM} | -800 | mAdc |

THERMAL CHARACTERISTICS

| Characteristic | Symbol | Max | Unit |
|--|-----------------------------------|-------------|-------------|
| Total Device Dissipation FR-5 Board (Note 1) @ T _A = 25°C Derate above 25°C | P _D | 225 1.8 | mW mW/°C |
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ | 556 | °C/W |
| Total Device Dissipation Alumina Substrate, (Note 2) @ T _A = 25°C Derate above 25°C | P _D | 300 2.4 | mW mW/°C |
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ | 417 | °C/W |
| Junction and Storage Temperature | T _J , T _{stg} | -65 to +150 | °C |


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. FR-5 = $1.0 \times 0.75 \times 0.062$ in.
- 2. Alumina = $0.4 \times 0.3 \times 0.024$ in. 99.5% alumina.
- 3. Reference SOA curve.



ON Semiconductor®

www.onsemi.com





SOT-23 (TO-236) CASE 318 STYLE 6

MARKING DIAGRAM



2A = Specific Device Code

M = Date Code*

= Pb–Free Package

(Note: Microdot may be in either location)

*Date Code orientation and/or overbar may vary depending upon manufacturing location.

ORDERING INFORMATION


| Device | Package | Shipping [†] |
|---------------|---------------------|-------------------------|
| MMBT3906LT1G | SOT-23 (Pb-Free) | 3,000 / Tape & Reel |
| MMBT3906LT3G | SOT-23 (Pb-Free) | 10,000 / Tape & Reel |
| SMMBT3906LT1G | SOT-23 (Pb-Free) | 3,000 / Tape & Reel |
| SMMBT3906LT3G | SOT-23 (Pb-Free) | 10,000 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

| Charac | teristic | Symbol | Min | Max | Unit |
|--|---|----------------------|-----------------------------|--------------------|--------------------|
| OFF CHARACTERISTICS | | | 1 | 1 | I. |
| Collector – Emitter Breakdown Voltage $(I_C = -1.0 \text{ mAdc}, I_B = 0)$ | | V _{(BR)CEO} | -40 | _ | Vdc |
| Collector – Base Breakdown Voltage $(I_C = -10 \mu Adc, I_E = 0)$ | | V _{(BR)CBO} | -40 | - | Vdc |
| Emitter – Base Breakdown Voltage $(I_E = -10 \mu Adc, I_C = 0)$ | | V _{(BR)EBO} | -5.0 | - | Vdc |
| Base Cutoff Current ($V_{CE} = -30 \text{ Vdc}$, $V_{EB} = -3.0 \text{ Vdc}$) | | I _{BL} | - | -50 | nAdc |
| Collector Cutoff Current (V _{CE} = -30 Vdc, V _{EB} = -3.0 Vdc) | | I _{CEX} | - | -50 | nAdc |
| ON CHARACTERISTICS (Note 4) | | 1 | • | • | • |
| DC Current Gain | | H _{FE} | 60 80 100 60 30 | - 300 - - | - |
| Collector – Emitter Saturation Voltage ($I_C = -10 \text{ mAdc}$, $I_B = -1.0 \text{ mAdc}$) ($I_C = -50 \text{ mAdc}$, $I_B = -5.0 \text{ mAdc}$) | | V _{CE(sat)} | _ _ | -0.25 -0.4 | Vdc |
| Base-Emitter Saturation Voltage ($I_C = -10$ mAdc, $I_B = -1.0$ mAdc) ($I_C = -50$ mAdc, $I_B = -5.0$ mAdc) | | V _{BE(sat)} | -0.65 - | -0.85 -0.95 | Vdc |
| SMALL-SIGNAL CHARACTERISTICS | | | | | |
| Current-Gain - Bandwidth Product (I _C = -10 mAdc, V _{CE} = -20 Vdc, f | = 100 MHz) | f _T | 250 | - | MHz |
| Output Capacitance $(V_{CB} = -5.0 \text{ Vdc}, I_E = 0, f = 1.0 \text{ M})$ | Hz) | C _{obo} | - | 4.5 | pF |
| Input Capacitance ($V_{EB} = -0.5 \text{ Vdc}$, $I_C = 0$, $f = 1.0 \text{ M}$ | Hz) | C _{ibo} | - | 10 | pF |
| Input Impedance ($I_C = -1.0 \text{ mAdc}$, $V_{CE} = -10 \text{ Vdc}$, $f = 1.0 \text{ kHz}$) | | h _{ie} | 2.0 | 12 | kΩ |
| Voltage Feedback Ratio ($I_C = -1.0 \text{ mAdc}, V_{CE} = -10 \text{ Vdc}, f = 1.0 \text{ kHz}$) | | h _{re} | 0.1 | 10 | X 10 ⁻⁴ |
| Small – Signal Current Gain $(I_C = -1.0 \text{ mAdc}, V_{CE} = -10 \text{ Vdc}, f = 1.0 \text{ kHz})$ | | h _{fe} | 100 | 400 | - |
| Output Admittance ($I_C = -1.0 \text{ mAdc}$, $V_{CE} = -10 \text{ Vdc}$, $f = 1.0 \text{ kHz}$) | | h _{oe} | 3.0 | 60 | μmhos |
| Noise Figure (I _C = $-100 \mu\text{Adc}$, V _{CE} = -5.0Vdc , R _S = $1.0 \text{k}\Omega$, f = 1.0kHz) | | NF | - | 4.0 | dB |
| SWITCHING CHARACTERISTICS | | • | • | • | • |
| Delay Time | $(V_{CC} = -3.0 \text{ Vdc}, V_{BE} = 0.5 \text{ Vdc}, I_{C} = -10 \text{ mAdc}, I_{B1} = -1.0 \text{ mAdc})$ | t _d | _ | 35 | no |
| Rise Time | | t _r | - | 35 | ns |
| Storage Time | $(V_{CC} = -3.0 \text{ Vdc}, I_{C} = -10 \text{ mAdc},$ | t _s | _ | 225 | ns |
| Fall Time | $I_{B1} = I_{B2} = -1.0 \text{ mAdc}$ | t _f | _ | 75 | 1.5 |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 4. Pulse Test: Pulse Width $\leq 300~\mu s$, Duty Cycle $\leq 2.0\%$.

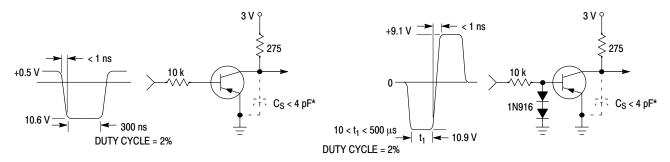

* Total shunt capacitance of test jig and connectors

Figure 1. Delay and Rise Time Equivalent Test Circuit

Figure 2. Storage and Fall Time Equivalent Test Circuit

TYPICAL TRANSIENT CHARACTERISTICS

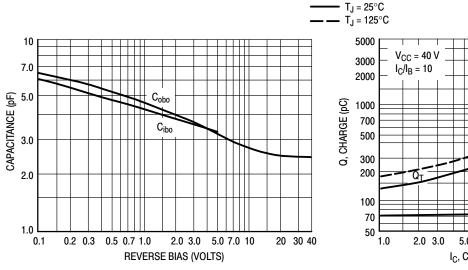


Figure 3. Capacitance

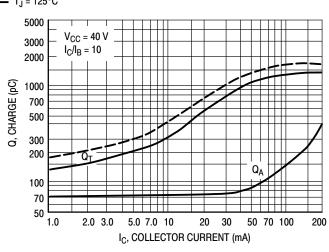


Figure 4. Charge Data

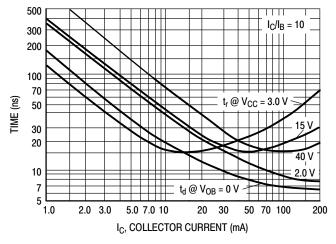


Figure 5. Turn-On Time

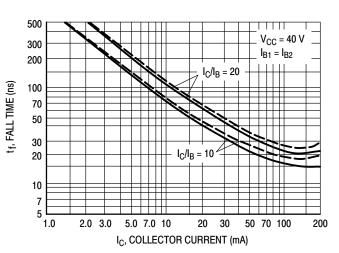
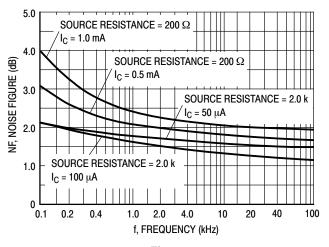


Figure 6. Fall Time

TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS NOISE FIGURE VARIATIONS

 $(V_{CE} = -5.0 \text{ Vdc}, T_A = 25^{\circ}\text{C}, Bandwidth = 1.0 \text{ Hz})$



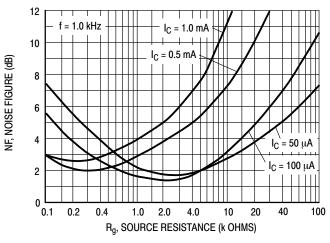
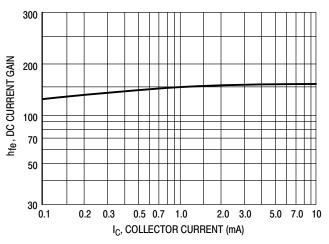


Figure 7.

Figure 8.

h PARAMETERS

 $(V_{CE} = -10 \text{ Vdc}, f = 1.0 \text{ kHz}, T_A = 25^{\circ}\text{C})$



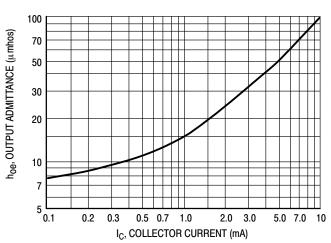
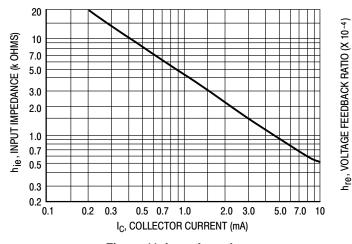


Figure 9. Current Gain

Figure 10. Output Admittance



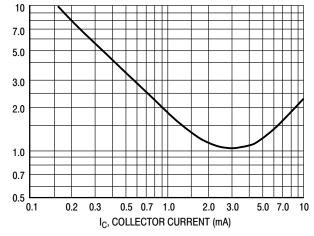


Figure 11. Input Impedance

Figure 12. Voltage Feedback Ratio

TYPICAL STATIC CHARACTERISTICS

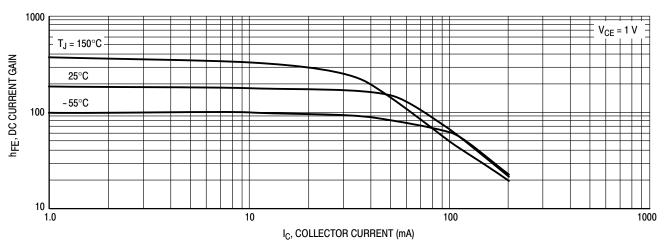


Figure 13. DC Current Gain

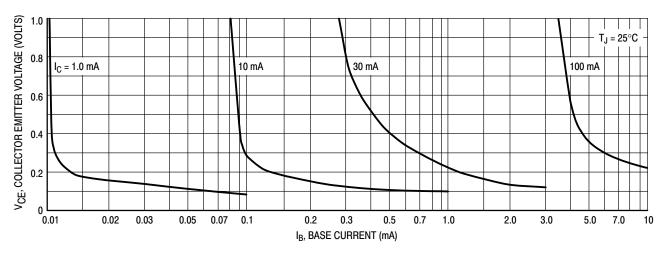


Figure 14. Collector Saturation Region

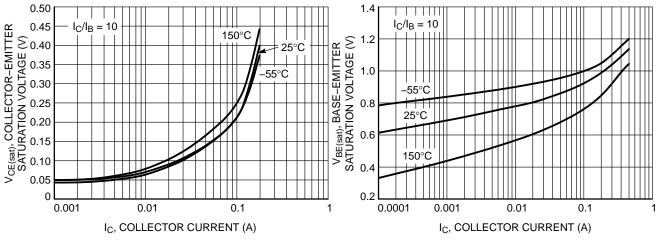


Figure 15. Collector Emitter Saturation Voltage vs. Collector Current

Figure 16. Base Emitter Saturation Voltage vs. **Collector Current**

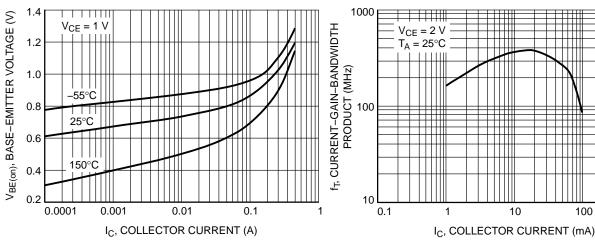


Figure 17. Base Emitter Voltage vs. Collector Current

Figure 18. Current Gain Bandwidth vs. **Collector Current**

100

1000

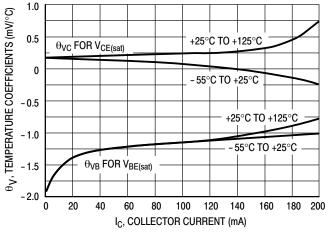


Figure 19. Temperature Coefficients

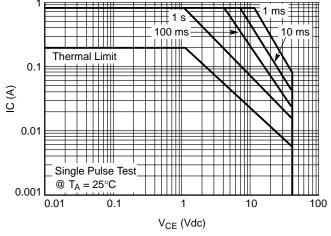


Figure 20. Safe Operating Area

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales