

October 2018

## Multilayer Directional Coupler

For 824-925MHz

# HHM2915A2

- 1.0x0.5mm [EIA 0402]\*
- \* Dimensions Code JIS[EIA]

## Caution

# The products in this catalog will be or have been stopped production

Discontinue Issue Date	Jun. 3, 2022		
Last Purchase Order Date	Mar. 31, 2023		
Last Shipment Date	Mar. 31, 2024		

Please refer to our Web site about replacement information.




# **Multilayer Directional Coupler**


For 824-925MHz


## HHM2915A2


## Conformity to RoHS Directive

#### SHAPES AND DIMENSIONS









## ■ RECOMMENDED LAND PATTERN



Dimensions in mm

RoHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/

<sup>•</sup> All specifications are subject to change without notice.

<sup>•</sup> Before using these products, be sure to request the delivery specifications.



## HHM2915A2

### **ELECTRICAL CHARACTERISTICS**

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Coupling Factor (dB)	824 to 925	22.0	23.0	24.4
Insertion Loss (dB)	824 to 925	_	0.13	0.15
	824 to 925	_	<del>-</del>	0.19 (-40 to +85°C)
Return Loss (dB)	824 to 925	15.56	21.6	_
Isolation (dB)	824 to 925	35	47.3	_
Characteristic Impedance (Ω)			50 (Nominal)	<del>-</del>

<sup>•</sup> Ta: +25°C

### **■TEMPERATURE RANGE**

Operating temperature	Storage temperature	
(°C)	(°C)	
-40 to +85	-40 to +85	7




All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.




## HHM2915A2

### **■ FREQUENCY CHARACTERISTICS**


## □INSERTION LOSS 0.0 0.1 Insertion Loss(dB) 0.4 750 800 900 950 1000 850 Frequency(MHz)

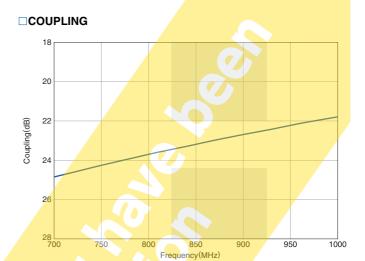


#### **RETURN LOSS**

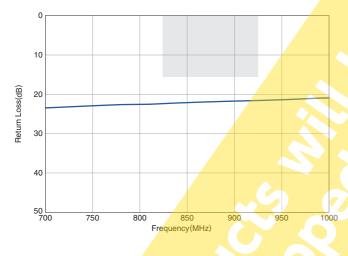



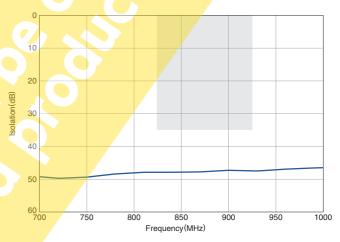

#### DIRECTIVITY

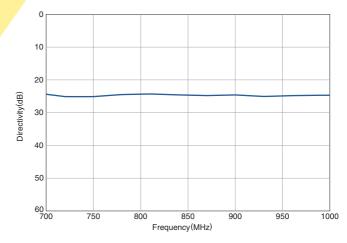


All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.



## HHM2915A2

### ■ RECOMMENDED REFLOW PROFILE

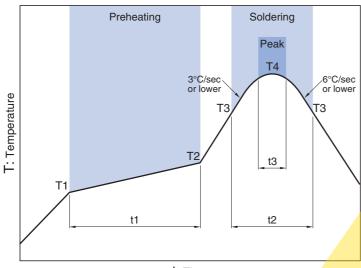

1.	-			
Τ.	- 1	п	m	P

Preheating		Soldering				
		Critical zone (T3 to T4)		Peak		
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3*
150°C	200°€	60 to 120sec	217°€	60 to 12	Osec 240 to 260°	C 30sec may

\*t3: Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

- All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.



## REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

## SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

## **⚠** REMINDERS

The products listed on this catalog are intended for use in general electronic equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.