



**2N5088**  
**2N5089**

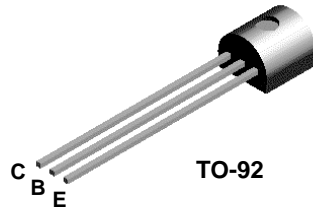

**MMBT5088**  
**MMBT5089**

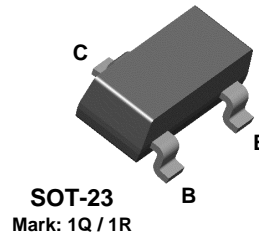

## NPN General Purpose Amplifier

This device is designed for low noise, high gain, general purpose amplifier applications at collector currents from 1 $\mu$ A to 50 mA.

### Absolute Maximum Ratings\*

TA = 25°C unless otherwise noted

| Symbol                            | Parameter  | Value         | Units |
|-----------------------------------|--|---------------|-------|
| V <sub>CEO</sub>                  | Collector-Emitter Voltage                        | <b>2N5088</b> | 30    |
|                                   |  | <b>2N5089</b> | 25    |
| V <sub>CBO</sub>                  | Collector-Base Voltage                           | <b>2N5088</b> | 35    |
|                                   |  | <b>2N5089</b> | 30    |
| V <sub>EBO</sub>                  | Emitter-Base Voltage                             | 4.5           | V     |
| I <sub>C</sub>                    | Collector Current - Continuous                   | 100           | mA    |
| T <sub>J</sub> , T <sub>stg</sub> | Operating and Storage Junction Temperature Range | -55 to +150   | °C    |

\*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

#### NOTES:

- 1) These ratings are based on a maximum junction temperature of 150 degrees C.
- 2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

### Thermal Characteristics

TA = 25°C unless otherwise noted

| Symbol           | Characteristic                                | Max                            |  | Units |
|------------------|---|--------------------------------|--|-------|
|                  |   | <b>2N5088</b><br><b>2N5089</b> | * <b>MMBT5088</b><br>* <b>MMBT5089</b> |       |
| P <sub>D</sub>   | Total Device Dissipation<br>Derate above 25°C | 625                            | 350                                    | mW    |
|                  |   | 5.0                            | 2.8                                    | mW/°C |
| R <sub>θJC</sub> | Thermal Resistance, Junction to Case          | 83.3                           |  | °C/W  |
| R <sub>θJA</sub> | Thermal Resistance, Junction to Ambient       | 200                            | 357                                    | °C/W  |

\*Device mounted on FR-4 PCB 1.6" X 1.6" X 0.06."

## NPN General Purpose Amplifier (continued)

### Electrical Characteristics

TA = 25°C unless otherwise noted

| Symbol                     | Parameter                            | Test Conditions                   | Min         | Max | Units |
|----------------------------|--------------------------------------|-----------------------------------|-------------|-----|-------|
| <b>OFF CHARACTERISTICS</b> |                                      |                                   |             |     |       |
| $V_{(BR)CEO}$              | Collector-Emitter Breakdown Voltage* | $I_C = 1.0 \text{ mA}, I_B = 0$   | <b>5088</b> | 30  | V     |
|                            |                                      |                                   | <b>5089</b> | 25  | V     |
| $V_{(BR)CBO}$              | Collector-Base Breakdown Voltage     | $I_C = 100 \mu\text{A}, I_E = 0$  | <b>5088</b> | 35  | V     |
|                            |                                      |                                   | <b>5089</b> | 30  | V     |
| $I_{CBO}$                  | Collector Cutoff Current             | $V_{CB} = 20 \text{ V}, I_E = 0$  | <b>5088</b> | 50  | nA    |
|                            |                                      | $V_{CB} = 15 \text{ V}, I_E = 0$  | <b>5089</b> | 50  | nA    |
| $I_{EBO}$                  | Emitter Cutoff Current               | $V_{EB} = 3.0 \text{ V}, I_C = 0$ |             | 50  | nA    |
|                            |                                      | $V_{EB} = 4.5 \text{ V}, I_C = 0$ |             | 100 | nA    |

### ON CHARACTERISTICS

|   |                                      |   |             |     |      |  |
|---|--------------------------------------|---|-------------|-----|------|--|
| $h_{FE}$  | DC Current Gain                      | $I_C = 100 \mu\text{A}, V_{CE} = 5.0 \text{ V}$ | <b>5088</b> | 300 | 900  |  |
|   |                                      |   | <b>5089</b> | 400 | 1200 |  |
|   |                                      | $I_C = 1.0 \text{ mA}, V_{CE} = 5.0 \text{ V}$  | <b>5088</b> | 350 |      |  |
|   |                                      |   | <b>5089</b> | 450 |      |  |
| $I_C = 10 \text{ mA}, V_{CE} = 5.0 \text{ V}^*$ |                                      | <b>5088</b>                                     | 300         |     |      |  |
|   |                                      | <b>5089</b>                                     | 400         |     |      |  |
| $V_{CE(sat)}$                                   | Collector-Emitter Saturation Voltage | $I_C = 10 \text{ mA}, I_B = 1.0 \text{ mA}$     |             | 0.5 | V    |  |
| $V_{BE(on)}$                                    | Base-Emitter On Voltage              | $I_C = 10 \text{ mA}, V_{CE} = 5.0 \text{ V}$   |             | 0.8 | V    |  |

### SMALL SIGNAL CHARACTERISTICS

|          |                                  |   |             |     |      |     |
|----------|----------------------------------|---|-------------|-----|------|-----|
| $f_T$    | Current Gain - Bandwidth Product | $I_C = 500 \mu\text{A}, V_{CE} = 5.0 \text{ mA},$<br>$f = 20 \text{ MHz}$ |             | 50  |      | MHz |
| $C_{cb}$ | Collector-Base Capacitance       | $V_{CB} = 5.0 \text{ V}, I_E = 0, f = 100 \text{ kHz}$                    |             |     | 4.0  | pF  |
| $C_{eb}$ | Emitter-Base Capacitance         | $V_{BE} = 0.5 \text{ V}, I_C = 0, f = 100 \text{ kHz}$                    |             |     | 10   | pF  |
| $h_{fe}$ | Small-Signal Current Gain        | $I_C = 1.0 \text{ mA}, V_{CE} = 5.0 \text{ V},$                           | <b>5088</b> | 350 | 1400 |     |
|          |                                  | $f = 1.0 \text{ kHz}$   | <b>5089</b> | 450 | 1800 |     |
| NF       | Noise Figure                     | $I_C = 100 \mu\text{A}, V_{CE} = 5.0 \text{ V},$                          | <b>5088</b> |     | 3.0  | dB  |
|          |                                  | $R_S = 10 \text{ k}\Omega,$<br>$f = 10 \text{ Hz to } 15.7 \text{ kHz}$   | <b>5089</b> |     | 2.0  | dB  |

\*Pulse Test: Pulse Width  $\leq 300 \mu\text{s}$ , Duty Cycle  $\leq 2.0\%$


### Spice Model

NPN (Is=5.911f Xti=3 Eg=1.11 Vaf=62.37 Bf=1.122K Ne=1.394 Ise=5.911f Ikf=14.92m Xtb=1.5 Br=1.271 Nc=2 Isc=0 Ikr=0 Rc=1.61 Cjc=4.017p Mjc=.3174 Vjc=.75 Fc=.5 Cje=4.973p Mje=.4146 Vje=.75 Tr=4.673n Tf=821.7p Itf=.35 Vtf=4 Xtf=7 Rb=10)


2N5088 / MMBT5088 / 2N5089 / MMBT5089

Typical Characteristics


Typical Pulsed Current Gain vs Collector Current

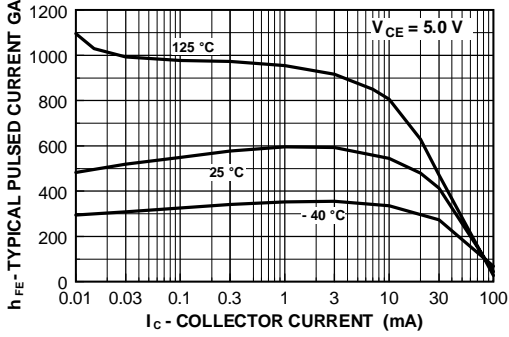


Collector-Emitter Saturation Voltage vs Collector Current

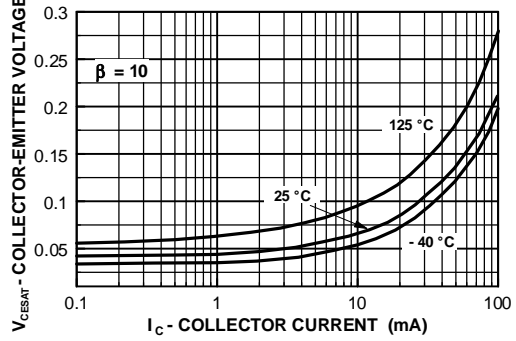


Base-Emitter Saturation Voltage vs Collector Current

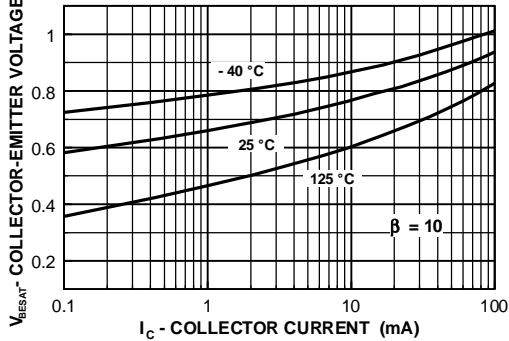

Base-Emitter ON Voltage vs Collector Current

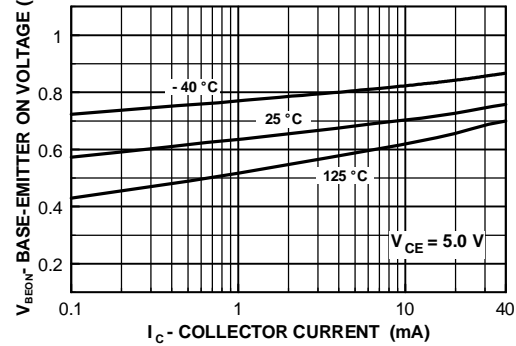

Collector-Cutoff Current vs Ambient Temperature

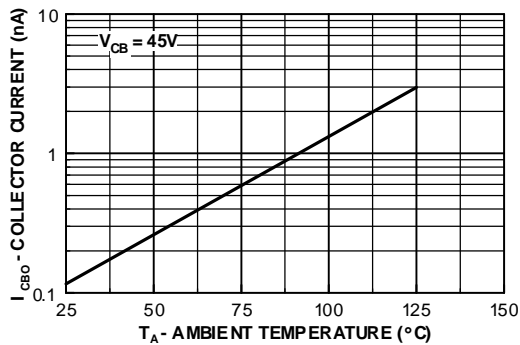


# NPN General Purpose Amplifier

(continued)


2N5088 / MMBT5088 / 2N5089 / MMBT5089

## Typical Characteristics (continued)


### Input and Output Capacitance vs Reverse Bias Voltage

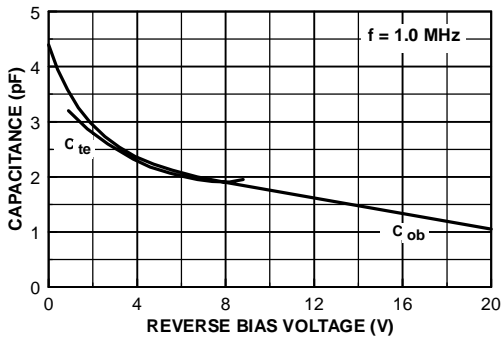


### Contours of Constant Gain Bandwidth Product ( $f_T$ )

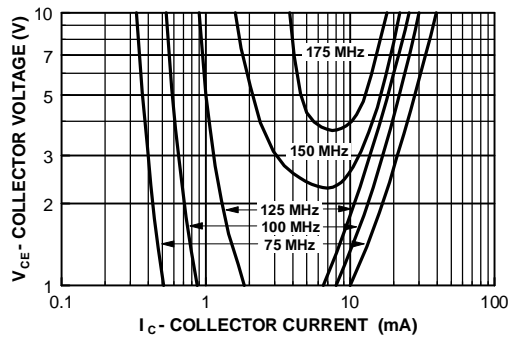


### Normalized Collector-Cutoff Current vs Ambient Temperature

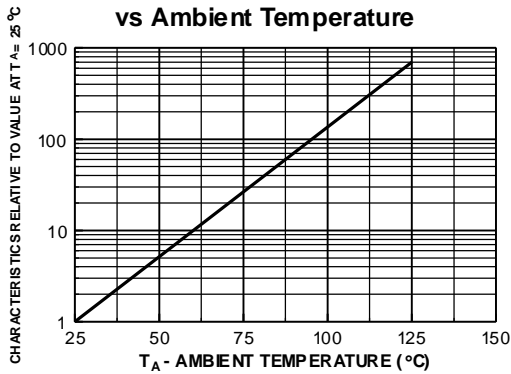


### Wideband Noise Frequency vs Source Resistance

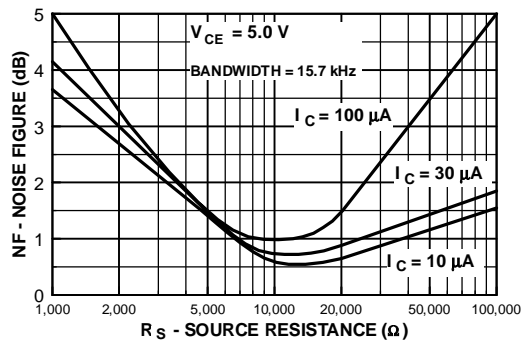

### Noise Figure vs Frequency

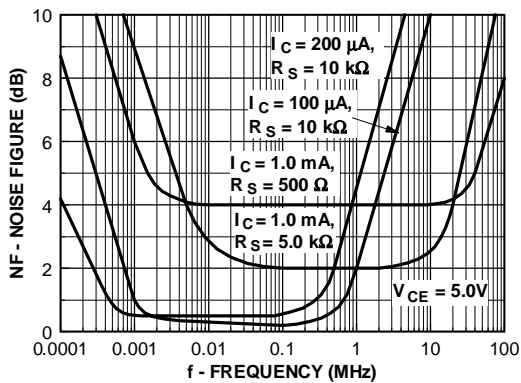


### Power Dissipation vs Ambient Temperature

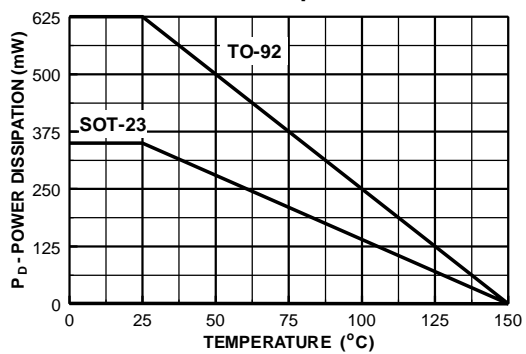


Typical Characteristics (continued)


Contours of Constant  
Narrow Band Noise Figure

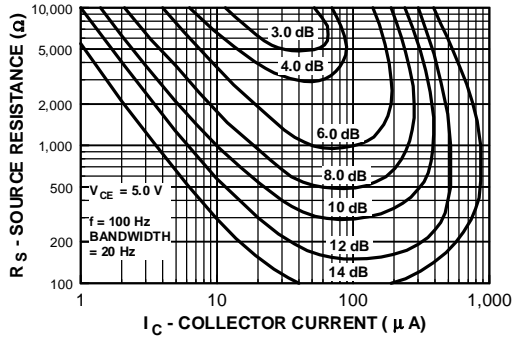


Contours of Constant  
Narrow Band Noise Figure

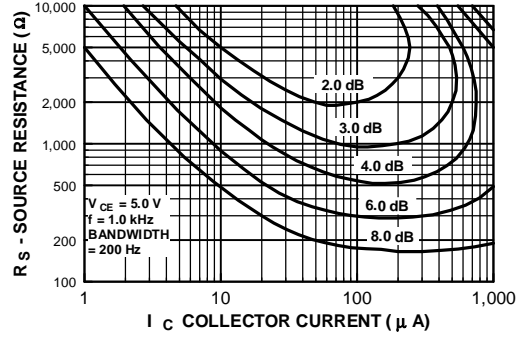




Contours of Constant  
Narrow Band Noise Figure

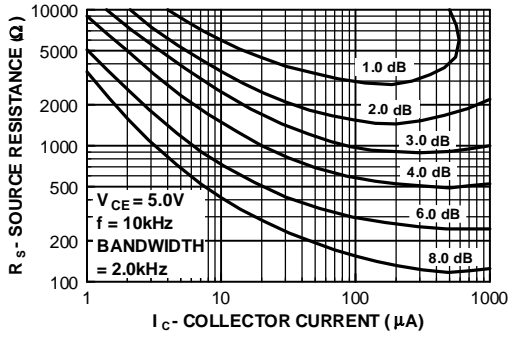

Contours of Constant  
Narrow Band Noise Figure

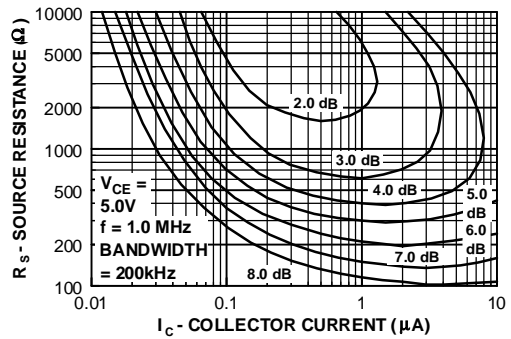

Typical Common Emitter Characteristics (f = 1.0 kHz)

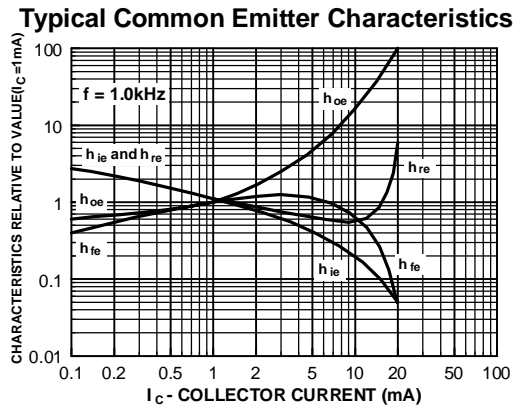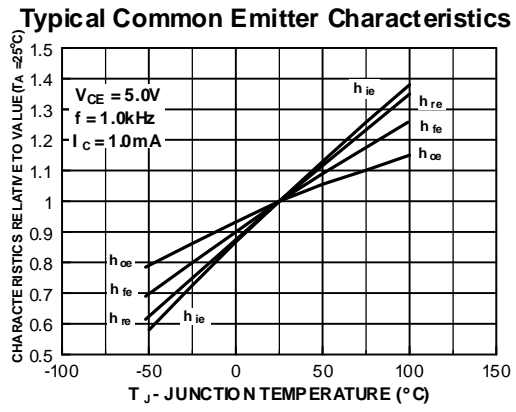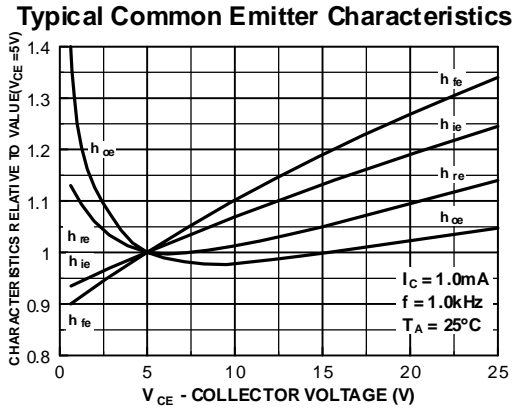

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|                      |                     |                     |            |
|----------------------|---------------------|---------------------|------------|
| ACEx™                | FASTr™              | PowerTrench®        | SyncFET™   |
| Bottomless™          | GlobalOptoisolator™ | QFET™               | TinyLogic™ |
| CoolFET™             | GTO™                | QS™                 | UHC™       |
| CROSSVOLT™           | HiSeC™              | QT Optoelectronics™ | VCX™       |
| DOME™                | ISOPPLANAR™         | Quiet Series™       |            |
| E <sup>2</sup> CMOS™ | MICROWIRE™          | SILENT SWITCHER®    |            |
| EnSigna™             | OPTOLOGIC™          | SMART START™        |            |
| FACT™                | OPTOPLANAR™         | SuperSOT™-3         |            |
| FACT Quiet Series™   | PACMAN™             | SuperSOT™-6         |            |
| FAST®                | POP™                | SuperSOT™-8         |            |

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition  |
|--------------------------|------------------------|---|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.  |
| Preliminary              | First Production       | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.   |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.   |

Home >> Find products >>

## 2N5088

NPN General Purpose Amplifier

### Contents

- [General description](#)
- [Product status/pricing/packageing](#)
- [Order Samples](#)
- [Models](#)
- [Qualification Support](#)




### General description

This device is designed for low noise, high gain, general purpose amplifier applications at collector currents from 1µA to 50 mA.

[back to top](#)

### Product status/pricing/packageing

**BUY**

| Product     | Product status  | Pb-free Status  | Pricing* | Package type          | Leads | Packing method | Package Marking Convention**        |
|-------------|-----------------|---|----------|-----------------------|-------|----------------|-------------------------------------|
| 2N5088BU    | Full Production |  Full Production  | \$0.025  | <a href="#">TO-92</a> | 3     | BULK           | Line 1: 2N Line 2: 5088 Line 3: -&3 |
| 2N5088TA    | Full Production |  Full Production | \$0.025  | <a href="#">TO-92</a> | 3     | AMMO           | Line 1: 2N Line 2: 5088 Line 3: -&3 |
| 2N5088TAR   | Full Production |  Full Production | \$0.025  | <a href="#">TO-92</a> | 3     | AMMO           | Line 1: 2N Line 2: 5088 Line 3: -&3 |
| 2N5088TA_NL | Full Production |   | N/A      | <a href="#">TO-92</a> | 3     | AMMO           | Line 1: 2N Line 2: 5088 Line 3: -&3 |

**BUY**

### Datasheet

[Download this datasheet](#)



[e-mail this datasheet](#)



### This page

[Print version](#)

### Related Links

[Request samples](#)

[How to order products](#)

[Product Change Notices \(PCNs\)](#)






[Support](#)

[Sales support](#)

[Quality and reliability](#)

[Design center](#)



|             |                 |  |         |                       |   |           |   |
|-------------|-----------------|--|---------|-----------------------|---|-----------|---|
|             |                 | <br>Full Production |         |                       |   |           |   |
| 2N5088TF    | Full Production | <br>Full Production | \$0.025 | <a href="#">TO-92</a> | 3 | TAPE REEL | Line 1: 2N Line 2: 5088 Line 3: -&3   |
| 2N5088TFR   | Full Production | <br>Full Production | \$0.025 | <a href="#">TO-92</a> | 3 | TAPE REEL | Line 1: 2N Line 2: 5088 Line 3: -&3   |
| 2N5088_D81Z | Full Production | <br>Full Production | N/A     | <a href="#">TO-92</a> | 3 | TAPE REEL | Line 1: \$Y (Fairchild logo)<br>&Z (Asm. Plant Code)<br>&3 (3-Digit Date Code)<br>Line 2: 2N Line 3: 5088 |
| 2N5088_J61Z | Full Production | <br>Full Production | N/A     | <a href="#">TO-92</a> | 3 | BULK      | Line 1: \$Y (Fairchild logo)<br>&Z (Asm. Plant Code)<br>&3 (3-Digit Date Code)<br>Line 2: 2N Line 3: 5088 |

\* Fairchild 1,000 piece Budgetary Pricing

\*\* A sample button will appear if the part is available through Fairchild's on-line samples program. If there is no sample button, please contact a [Fairchild distributor](#) to obtain samples



Indicates product with Pb-free second-level interconnect. For more information [click here](#).

Package marking information for product 2N5088 is available. [Click here for more information](#).

[back to top](#)


### Models

| Package & leads | Condition                          | Temperature range | Vcc range | Software version | Revision date |
|-----------------|------------------------------------|-------------------|-----------|------------------|---------------|
| PSPICE          |                                    |                   |           |                  |               |
| TO-92-3         | <a href="#">Electrical/Thermal</a> | -55°C to 150°C    | 0V to 35V | 9.2              | Jan 26, 2003  |

[back to top](#)

### Qualification Support

Click on a product for detailed qualification data



| <b>Product</b>              |
|-----------------------------|
| <a href="#">2N5088BU</a>    |
| <a href="#">2N5088TA</a>    |
| <a href="#">2N5088TAR</a>   |
| <a href="#">2N5088TA_NL</a> |
| <a href="#">2N5088TF</a>    |
| <a href="#">2N5088TFR</a>   |
| <a href="#">2N5088_D81Z</a> |
| <a href="#">2N5088_J61Z</a> |

[back to top](#)

© 2007 Fairchild Semiconductor



[Products](#) | [Design Center](#) | [Support](#) | [Company News](#) | [Investors](#) | [My Fairchild](#) | [Contact Us](#) | [Site Index](#) | [Privacy Policy](#) | [Site Terms & Conditions](#) | [Standard Terms & Conditions](#) | [Legal](#)