FAIRCHILD

SEMICONDUCTOR®

KSA709

High Voltage Amplifier

- Collector-Base Voltage : V_{CBO}= -160V
- Collector Power Dissipation : P_C=800mW
- Complement to KSC1009
- Suffix "-C" means Center Collector (1. Emitter 2. Collector 3. Base)



PNP Epitaxial Silicon Transistor

Absolute Maximum Ratings Ta=25°C unless otherwise noted

Symbol	Parameter	Ratings	Units	
V _{CBO}	Collector-Base Voltage	-160	V	
V _{CEO}	Collector-Emitter Voltage	-150	V	
V _{EBO}	Emitter-Base Voltage	-8	V	
I _C	Collector Current	-700	mA	
P _C	Collector Power Dissipation	800	mW	
Junction Temperature		150	°C	
T _{STG}	Storage Temperature	-55 ~ 150	°C	


Electrical Characteristics T_a=25°C unless otherwise noted

Symbol	Parameter	Test Condition	Тур.	Max.	Units	
BV _{CBO}	Collector-Base Breakdown Voltage	I _C = -100μA, I _E =0	-160			V
BV _{CEO}	Collector-Emitter Breakdown Voltage	I _C = -10mA, I _B =0	-150			V
BV _{EBO}	Emitter-Base Breakdown Voltage	I _E = -100μA, I _C =0	-8			V
I _{CBO}	Collector Cut-off Current	V _{CB} = -100V, I _E =0			-0.1	μΑ
I _{EBO}	Emitter Cut-off Current	V _{EB} = -5V, I _C =0			-0.1	μΑ
h _{FE}	* DC Current Gain	V _{CE} = -2V, I _C = -50mA	70		400	
V _{CE} (sat)	* Collector-Emitter Saturation Voltage	I _C = -200mA, I _B = -20mA		-0.3	-0.4	V
V _{BE} (sat)	* Base-Emitter Saturation Voltage	I _C = -200mA, I _B = -20mA		-0.9	-1.0	V
f _T	Current Gain Bandwidth Product	V _{CE} = -10V, I _C = -50mA		50		MHz
C _{ob}	Output Capacitance	V _{CB} = -10V, I _E =0, f=1MHz			10	pF

* Pulse Test: PW≤350µs, Duty cycle≤2%


h_{FE} Classification

Classification	0	Y	G	
h _{FE}	70 ~ 140	120 ~ 240	200 ~ 400	

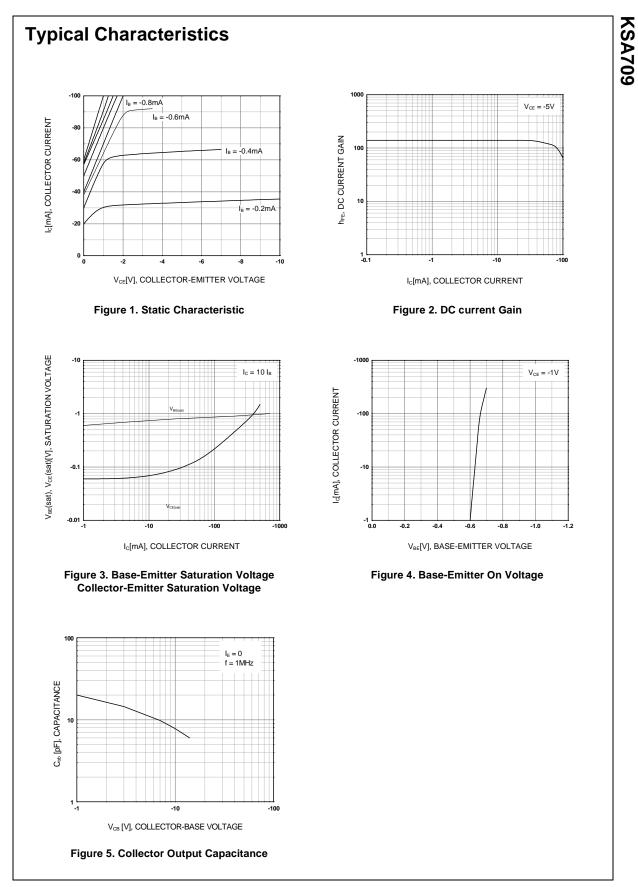

©2004 Fairchild Semiconductor Corporation

Rev. B1, April 2004

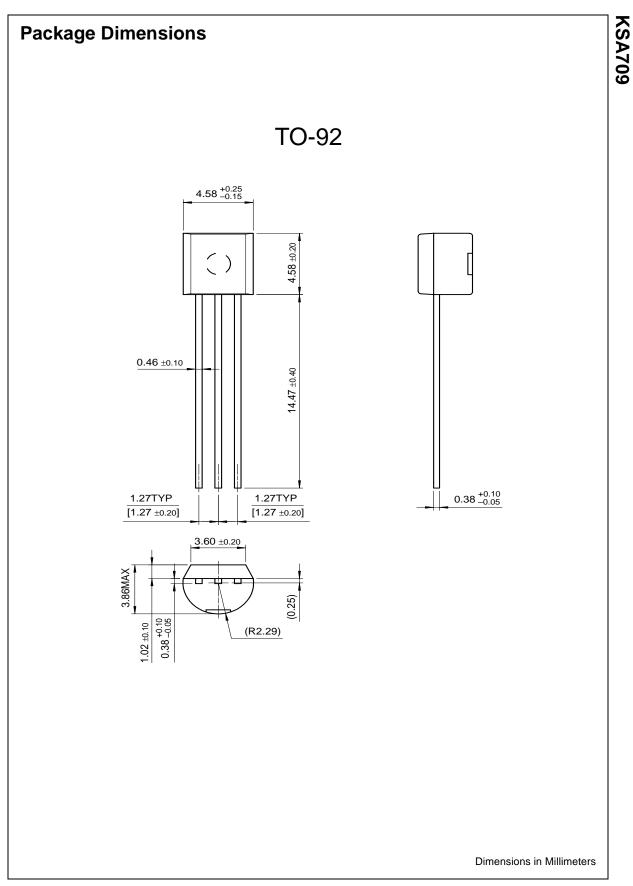

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FACT Quiet Series™	ImpliedDisconnect™	PACMAN™	SPM™
ActiveArray™	FAST [®]	ISOPLANAR™	POP™	Stealth™
Bottomless™	FASTr™	LittleFET™	Power247™	SuperFET™
CoolFET™	FPS™	MICROCOUPLER™	PowerSaver™	SuperSOT™-3
CROSSVOLT™	FRFET™	MicroFET™	PowerTrench [®]	SuperSOT™-6
DOME™	GlobalOptoisolator™	MicroPak™	QFET [®]	SuperSOT™-8
EcoSPARK™	GTO™	MICROWIRE™	QS™	SyncFET™
E ² CMOS™	HiSeC™	MSX™	QT Optoelectronics [™]	TinyLogic [®]
EnSigna™	I ² C [™]	MSXPro™	Quiet Series™	TINYOPTO™
FACT™	<i>i-Lo</i> ™	OCX™	RapidConfigure™	TruTranslation™
Across the board	. Around the world.™	OCXPro™	RapidConnect™	UHC™
The Power Franchise [®]		OPTOLOGIC [®]	SILENT SWITCHER [®]	UltraFET [®]
Programmable A	ctive Droop™	OPTOPLANAR™	SMART START™	VCX™

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:


1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Design p		This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.



Home >> Find products >>

KSA709		Related Links
PNP Epitaxial Silicon Transistor		Request samples
Contents	BUY	How to order products
• <u>Features</u> • <u>Product status/pricing/packaging</u> • <u>Order Samples</u>	Datasheet Download this	Product Change Notices (PCNs)
•Qualification Support	datasheet	<u>Support</u>
Features		Sales support
High Voltage Amplifier		Quality and reliability
 Collector-Base Voltage : V_{CBO} = -160V Collector Dissipation : P_C = 800mW 	e-mail this datasheet	Design center
 Complement to KSC1009 Suffix "-C" means Center Collector (1. Emitter 2. Collector 3. Base) 	This page Print version	

back to top

Product status/pricing/packaging

BUY

KSA709CGBU Full Production Image: Sector of the secto	Product	Product status	Pb-free Status	Pricing*	Package type	Leads	Packing method	Package Marking Convention**
Full Production	KSA709CGBU	Full Production		\$0.033	<u>TO-92</u>	3	BULK	<u>Line 1:</u> A709 <u>Line 3:</u> GC&3
	KSA709CGTA	Full Production	Full Production	\$0.033	<u>TO-92</u>	3	AMMO	Line 1: A709 Line 3: GC&3
KSA709COBU Full Production \$0.033 TO-92 3 BULK Line 1: A709 Line 3: OC&3	KSA709COBU	Full Production		\$0.033	<u>TO-92</u>	3	BULK	<u>Line 1:</u> A709 <u>Line 3:</u> OC&3

KSA709COTA	Full Production	Full Production	\$0.033	<u>TO-92</u>	3	АММО	<u>Line 1:</u> A709 <u>Line 3:</u> OC&3
KSA709CYBU	Full Production	Full Production	\$0.033	<u>TO-92</u>	3	BULK	<u>Line 1:</u> A709 <u>Line 3:</u> YC&3
KSA709CYTA	Full Production	Full Production	\$0.033	<u>TO-92</u>	3	АММО	<u>Line 1:</u> A709 <u>Line 3:</u> YC&3
KSA709GBU	Full Production	Full Production	\$0.033	<u>TO-92</u>	3	BULK	<u>Line 1:</u> A709 <u>Line 3:</u> G-&3
KSA709GTA	Full Production	Full Production	\$0.033	<u>TO-92</u>	3	АММО	<u>Line 1:</u> A709 <u>Line 3:</u> G-&3
KSA709OBU	Full Production	Full Production	\$0.033	<u>TO-92</u>	3	BULK	<u>Line 1:</u> A709 <u>Line 3:</u> O-&3
KSA709OTA	Full Production	Full Production	\$0.033	<u>TO-92</u>	3	АММО	<u>Line 1:</u> A709 <u>Line 3:</u> O-&3
KSA709YBU	Full Production	Full Production	\$0.033	<u>TO-92</u>	3	BULK	<u>Line 1:</u> A709 <u>Line 3:</u> Y-&3
KSA709YTA	Full Production	Full Production	\$0.033	<u>TO-92</u>	3	АММО	<u>Line 1:</u> A709 <u>Line 3:</u> Y-&3

* Fairchild 1,000 piece Budgetary Pricing
 ** A sample button will appear if the part is available through Fairchild's on-line samples program. If there is no sample button, please contact a <u>Fairchild distributor</u> to obtain samples

Ø Indicates product with Pb-free second-level interconnect. For more information click here.

Package marking information for product KSA709 is available. Click here for more information .

back to top

Qualification Support

Click on a product for detailed qualification data

Product
KSA709CGBU
KSA709CGTA
KSA709COBU
KSA709COTA
KSA709CYBU
KSA709CYTA
KSA709GBU
KSA709GTA
KSA709OBU
KSA709OTA
KSA709YBU
KSA709YTA

back to top

© 2007 Fairchild Semiconductor

