

#### ■ Features

• Silicon Planar Power Zener Diodes for use in stabilizing and clipping circuits with high power rating. Standard Zener voltage tolerance is 10%. Add suffix A for 5% tolerance. Other tolerances available upon request.



## Absolute Maximum Ratings (T<sub>a</sub>=25°C)

	Symbols	Values	Units
Zener current see Table "Characteristics"			
Power dissipation at T <sub>amb</sub> =25°C	P <sub>tot</sub>	1 ¹)	W
Junction temperature	T <sub>j</sub>	200	°C
Storage temperature range	T <sub>s</sub>	-65 to +200	$^{\circ}$

#### Note:

# Characteristics at Tamb=25℃

	Symbols	Min.	Тур.	Max.	Units
Thermal resistance junction to ambient Air	$R_{\text{thA}}$	-	-	170 ¹)	K/W
Forward voltage at I <sub>F</sub> =200mA	$V_{_{\rm F}}$	-	-	1.2	V

#### Note:

<sup>(1)</sup> Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature.

<sup>(1)</sup> Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature.



Device	V <sub>Z</sub> (V) @ I <sub>Z</sub> (Note 1)			Toot Current	Max. Zener Impedance			Leakage Current	
	Min.	Тур.	Max.	I <sub>Z</sub> (mA)	Z <sub>Z</sub> @I <sub>Z</sub> (Ω)	Z <sub>ZK</sub> @ I <sub>ZK</sub> (Ω)	I <sub>ZK</sub> (mA)	I <sub>R</sub> (μA)	V <sub>R</sub> (V)
1N4728A	3.315	3.3	3.465	76	10	400	1	100	1
1N4729A	3.42	3.6	3.78	69	10	400	1	100	1
1N4730A	3.705	3.9	4.095	64	9	400	1	50	1
1N4731A	4.085	4.3	4.515	58	9	400	1	10	1
1N4732A	4.465	4.7	4.935	53	8	500	1	10	1
1N4733A	4.845	5.1	5.355	49	7	550	1	10	1
1N4734A	5.32	5.6	5.88	45	5	600	1	10	2
1N4735A	5.89	6.2	6.51	41	2	700	1	10	3
1N4736A	6.46	6.8	7.14	37	3.5	700	1	10	4
1N4737A	7.125	7.5	7.875	34	4	700	0.5	10	5
1N4738A	7.79	8.2	8.61	31	4.5	700	0.5	10	6
1N4739A	8.645	9.1	9.555	28	5	700	0.5	10	7
1N4740A	9.5	10	10.5	25	7	700	0.25	10	7.6
1N4741A	10.45	11	11.55	23	8	700	0.25	5	8.4
1N4742A	11.4	12	12.6	21	9	700	0.25	5	9.1
1N4743A	12.35	13	13.65	19	10	700	0.25	5	9.9
1N4744A	14.25	15	15.75	17	14	700	0.25	5	11.4
1N4745A	15.2	16	16.8	15.5	16	700	0.25	5	12.2
1N4746A	17.1	18	18.9	14	20	750	0.25	5	13.7
1N4747A	19	20	21	12.5	22	750	0.25	5	15.2

Device	V <sub>Z</sub> (V) @ I <sub>Z</sub> (Note 1)			Tost Current	Max. Zener Impedance			Leakage Current	
	Min.	Тур.	Max.	Test Current I <sub>Z</sub> (mA)	Z <sub>Z</sub> @ I <sub>Z</sub> (Ω)	Z <sub>ZK</sub> @ I <sub>ZK</sub> (Ω)	I <sub>ZK</sub> (mA)	I <sub>R</sub> (μΑ)	V <sub>R</sub> (V)
1N4748A 1N4749A 1N4750A 1N4751A 1N4752A	20.9 22.8 25.65 28.5 31.35	22 24 27 30 33	23.1 25.2 28.35 31.5 34.65	11.5 10.5 9.5 8.5 7.5	23 25 35 40 45	750 750 750 1000 1000	0.25 0.25 0.25 0.25 0.25 0.25	5 5 5 5	16.7 18.2 20.6 22.8 25.1
1N4753A 1N4754A 1N4755A 1N4756A 1N4757A	34.2 37.05 40.85 44.65 48.45	36 39 43 47 51	37.8 40.95 45.15 49.35 53.55	7 6.5 6 5.5 5	50 60 70 80 95	1000 1000 1500 1500 1500	0.25 0.25 0.25 0.25 0.25 0.25	5 5 5 5	27.4 29.7 32.7 35.8 38.8
1N4758A 1N4759A 1N4760A 1N4761A 1N4762A	53.2 58.9 64.6 71.25 77.9	56 62 68 75 82	58.8 65.1 71.4 78.75 86.1	4.5 4 3.7 3.3 3	110 125 150 175 200	2000 2000 2000 2000 2000 3000	0.25 0.25 0.25 0.25 0.25 0.25	5 5 5 5	42.6 47.1 51.7 56 62.2
1N4763A 1N4764A	86.45 95	91 100	95.55 105	2.8 2.5	250 350	3000 3000	0.25 0.25	5 5	69.2 76

#### Notes:

<sup>(1)</sup> The Zener Impedance is derived from the 60 Hz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener current ( $I_{ZT}$  or  $I_{ZK}$ ) is superimposed on  $I_{ZT}$  or  $I_{ZK}$ . Zener Impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.

<sup>(2)</sup> Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature.

<sup>(3)</sup> Measured under thermal equilibrium and DC test conditions.

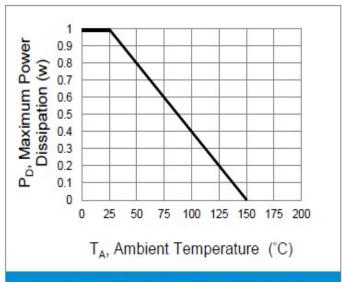


Fig.1 Steady-State Power Derating Curve

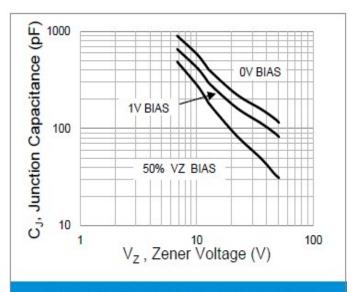


Fig.2 Typical Junction Capacitance

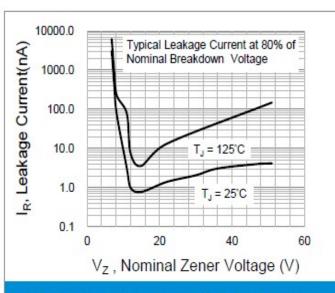


Fig.3 Typical Leakage Characteristics

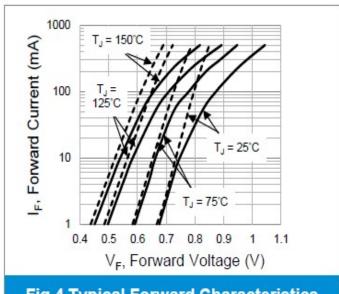


Fig.4 Typical Forward Characteristics

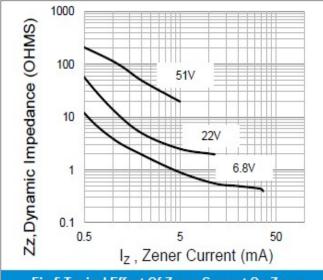


Fig.5 Typical Effect Of Zener Current On Zener Impedance



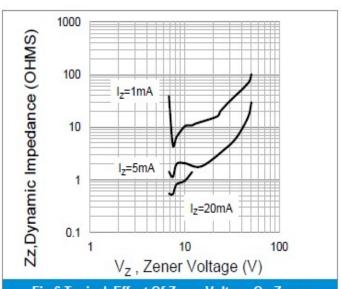


Fig.6 Typical Effect Of Zener Voltage On Zener Impedance



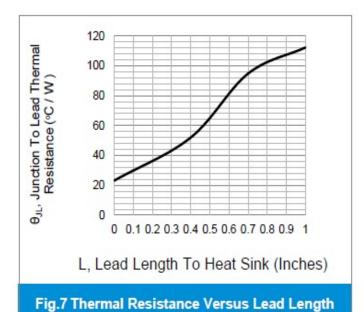


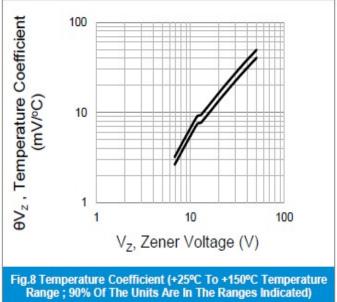

## ■ Ordering Information (Example)

PREFERED	PACKAGE CODE	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
1N4728A THRU 1N4764A	DO-41	5000	5000	50000	Ammo box

### **■** Outline Dimensions

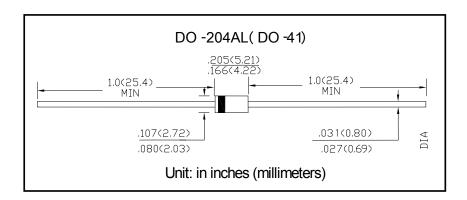

## IMPORTANT NOTICE AND DISCLAIMER

AM RESERVES THE RIGHT TO MAKE CHANGES TO ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE. CUSTOMERS SHOULD OBTAIN AND CONFIRM THE LATEST PRODUCT INFORMATION AND SPECIFICATIONS BEFORE FINAL DESIGN PURCHASE OR USE.

AM disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

All information are provided as-is, even it has qualified by the AEC-Q101 which satisfy industrial application requirement, except as expressly stated in this data sheet is applied for automotive grade, AM make no warranties, representation or guarantee, whether express, implied or statutory, including, without limitation, regarding any merchantability, satisfactory quality, or fitness for a particular purpose with respect to AM.

AM does not assume any liability or compensation for any application assistance or customer product design, and make no warranty or accept any liability with products, which are purchased or used for any unintended or unauthorized application.

Except as expressly indicated in writing, AM products are not designed for use in medical, life-saving, or lifesustaining applications or for any other application in which the failure of the AM product could result in personal injury or death. Customers using or selling AM products not expressly indicated for use in such applications do so at their own risk. Please contact authorized AM personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of AM. Product names and markings noted herein may be trademarks of their respective owners.