High Current Molded Power Inductor - PA5400 & PM5400 Series















Meight: 1.2mm Max

Footprint: 3.7mm x 3.4mm Max

© Current Rating: up to 10A

Inductance Range: 0.15 to 10uH

Migh current, low DCR, and high efficiency

Shielded Construction and compact design

Minimized acoustic noise and minimized leakage flux noise

200 Vdc Isolation Between Terminal and Core

Available in Commercial (PA) and Automotive (PM) grades

		Electrical Specifications @ 25°C - Operating Temperature -55°C to +125°C								
	Automotive <sup>6,7</sup>	Inductance <sup>5</sup>	Rated³ Current	DC Resistance		Saturation <sup>2</sup> Current				
Commercial <sup>6,7</sup>		(100KHz, 1.0V)	TYP.	TYP.	MAX.	TYP.				
		uH±20%	A	$\mathbf{m}\Omega$	mΩ	A				
PA5400.151NLT	PM5400.151NLT	0.15*	10	9.6	11	14				
PA5400.221NLT	PM5400.221NLT	0.22	6.5	14	17	10				
PA5400.331NLT	PM5400.331NLT	0.33	6.2	16	20	9.2				
PA5400.361NLT	PM5400.361NLT	0.36	6	18.5	23	8.5				
PA5400.471NLT	PM5400.471NLT	0.47	5	25	30	7.2				
PA5400.561NLT	PM5400.561NLT	0.56	4.5	31	36	6.6				
PA5400.681NLT	PM5400.681NLT	0.68	4	34	40	6.1				
PA5400.821NLT	PM5400.821NLT	0.82	3.5	41	48	5.8				
PA5400.102NLT	PM5400.102NLT	1.0	3.3	50	60	5.5				
PA5400.152NLT	PM5400.152NLT	1.5	3	71	85	4				
PA5400.222NLT	PM5400.222NLT	2.2	2.7	98	115	3.4				
PA5400.332NLT	PM5400.332NLT	3.3	2	191	210	3.1				
PA5400.472NLT	PM5400.472NLT	4.7	1.6	266	293	2.8				
PA5400.562NLT	PM5400.562NLT	5.6	1.5	310	360	2.2				
PA5400.682NLT	PM5400.682NLT	6.8	1.4	360	400	2				
PA5400.822NLT	PM5400.822NLT	8.2	1.2	420	463	1.7				
PA5400.103NLT	PM5400.103NLT	10	1	498	550	1.4				

Power.PulseElectronics.com P874. C (05/22)

High Current Molded Power Inductor - PA5400 & PM5400 Series




#### Notes:


- 1. Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- 2. The saturation current is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- 3. The rated current is the DC current required to raise the component temperature by approximately 40°C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- 4. The part temperature (ambient+temp rise) should not exceed 125°C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

- 5. Please note that the inductance tolerance of all parts are ±20%, except those indicated by an \* which are +/- 30%.
- Parts shown in bold are standard catalog parts and are available through sample stock and distribution. Parts in lighter font are available but are not necessarily held in sample stock or distribution and lead times may be longer. Please contact Pulse for availablity.
- The PM prefix parts are AEC-Q200 qualified and has full automotive IATF16949
  certification. The mechanical dimensions are 100% tested in production but do not
  necessarily meet a product capability index (Cpk) 1.33 and therefore may not strictly
  conform to PPAP.
- 8. Special characteristics

### **Mechanical**

#### PA5400/PM5400

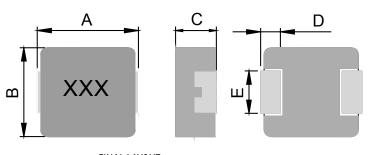



	FINAL	LAY0U

2

Series	A	В	С	D	E	l	G	Н
PA5400/PM5400	3.5+/-0.2	3.2+/-0.2	1+/-0.2	0.7+/-0.2	1.2+/-0.2	4.1	1.9	1.45


All Dimensions in mm.


Power.PulseElectronics.com P874. C (05/22)


High Current Molded Power Inductor - PA5400 & PM5400 Series
















Direction of tape


SURFACE MOUNTING TYPE, REEL/TAPE LIST								
	REEL SIZ	Æ (mm)	TA	QTY				
	A	G	<b>P</b> ,	W	K <sub>o</sub>	PCS/REEL		
PA5400/PM5400	Ø330	12.4	8	12	1.5	4000		


### **Typical Performance Curves**


### PA5400/PM5400


















Power.PulseElectronics.com


Shielded Drum Core - PA4331.XXXNLT Series




















#### For More Information:

Americas - prodinfo\_power\_americas@yageo.com | Europe - prodinfo\_power\_emea@yageo.com | Asia - prodinfo\_power\_asia@yageo.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2022. Pulse Electronics, Inc. All rights reserved.

