Technical Data Sheet



SP4T Terminated Ramses SMA 18GHz Normaly open Indicators 28Vdc

Positive common D-sub connector

PAGE 1/2 ISSUE 30.01.15 SERIE : SPnT PART NUMBER : R574413415

RF CHARACTERISTICS

Number of ways : 4

Frequency range : 0 - 18 GHz Impedance : 50 Ohms

Frequency (GHz)	DC - 3	3 - 8	8 - 12.4	12.4 - 18
VSWR max	1.20	1.30	1.40	1.50
Insertion loss max	0.20 dB	0.30 dB	0.40 dB	0.50 dB
Isolation min	80 dB	70 dB	60 dB	60 dB
Average power (*)	240 W	150 W	120 W	100 W

TERMINATION IMPEDANCE : 50 Ohms

TERM. AVG. POWER AT 25° C : 1 W per termination / 3 W total power

ELECTRICAL CHARACTERISTICS

Actuator : NORMALLY OPEN

Nominal current ** : 102 mA

Actuator voltage (Vcc) : 28V (24 to 30V) / POSITIVE COMMON
Terminals : 25 pins D-SUB male connector

Indicator rating : 1 W / 30 V / 100 mA

MECHANICAL CHARACTERISTICS

Connectors : SMA female per MIL-C 39012 Life : 2.000.000 cycles per position

Switching Time*** : <15 ms

Construction : Splashproof

Weight : < 250 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

(** At 25° C ±10%)

(*** Nominal voltage; 25° C)









SP4T Terminated Ramses SMA 18GHz Normaly open Indicators 28Vdc Positive common D-sub connector


PAGE **2/2** ISSUE 30.01.15 SERIE: SPnT PART NUMBER: **R574413415**

DRAWING



Voltage	RF Continuity	Ind.
+C -1	$IN \leftrightarrow 1$	D.E
+C -2	$IN \leftrightarrow 2$	D.F
+C -3	$IN \leftrightarrow 3$	D.G
+C -4	$IN \leftrightarrow 4$	D.H






RADIALL® R574413415 0 - 18 GHz Un: 28V

Lot:____

General tolerances: ±0.5 mm

SCHEMATIC DIAGRAM

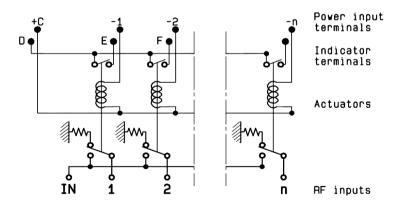

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.