Technical Data Sheet



SP12T Terminated Ramses SMA 12.4GHz Latching Self-cut-off Auto-reset Indicators 12Vdc TTL Drive Diodes D-sub connector

PAGE 1/2 ISSUE 30.01.15 SERIE : SPnT PART NUMBER : R574492225

RF CHARACTERISTICS

Number of ways : 12

Frequency range : 0 - 12.4 GHz Impedance : 50 Ohms

Frequency (GHz)	DC - 3	3 - 8	8 - 12.4
VSWR max	1.20	1.40	1.60
Insertion loss max	0.20 dB	0.40 dB	0.60 dB
Isolation min	80 dB	70 dB	60 dB
Average power (*)	240 W	150 W	120 W

TERMINATION IMPEDANCE : 50 Ohms

TERM. AVG. POWER AT 25° C : 1 W per termination / 3 W total power

ELECTRICAL CHARACTERISTICS

Actuator : LATCHING
Nominal current ** : 1280 mA

Actuator voltage (Vcc) : 12V (10.2 to 13V)

Terminals : 44 pins D-SUB male connector

 $\begin{array}{ll} \mbox{Indicator rating} & : \mbox{1 W / 30 V / 100 mA} \\ \mbox{Self cut-off time} & : \mbox{40 ms} < \mbox{CT} < \mbox{120 ms} \\ \end{array}$

TTL inputs (E) - High level : 2.2 to 5.5 V / 800μA at 5.5 V - Low level : 0 to 0.8 V / 20μA at 0.8 V

MECHANICAL CHARACTERISTICS

Connectors : SMA female per MIL-C 39012 Life : 2.000.000 cycles per position

Switching Time*** : < 50 msConstruction : Splashproof
Weight : < 400 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C
Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

(** At 25° C ±10%)

(*** Nominal voltage; 25° C)










SP12T Terminated Ramses SMA 12.4GHz Latching Self-cut-off Auto-reset Indicators 12Vdc TTL Drive Diodes D-sub connector



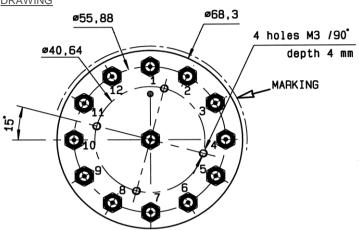

TTL input	RF Continuity	Ind.
E1 = 1	$IN \leftrightarrow 1$	D.E
E2 = 1	$IN \leftrightarrow 2$	D.F
E3 = 1	$IN \leftrightarrow 3$	D.G
E4 = 1	IN ↔ 4	D.H
E5 = 1	IN ↔ 5	D.I
E6 = 1	IN ↔ 6	D.J
E7 = 1	$IN \leftrightarrow 7$	D.K
E8 = 1	IN ↔ 8	D.L
E9 = 1	IN ↔ 9	D.M
E10 = 1	IN ↔ 10	D.N
E11 = 1	IN ↔ 11	D.O
E12 = 1	IN ↔ 12	D.P

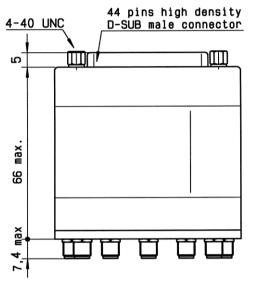


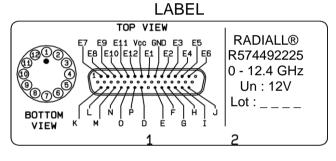



General tolerances: ±0.5 mm

SCHEMATIC DIAGRAM

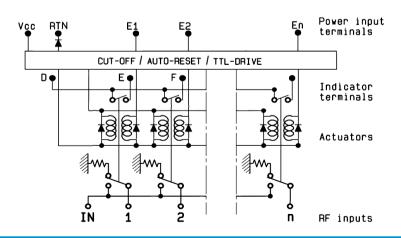

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.