Technical Data Sheet



SP3T Ramses SMA 18GHz Normally open Indicators 12Vdc TTL Diodes

D-sub connector

PAGE 1/2 ISSUE 22-03-22 SERIE : SPnT PART NUMBER : R573412325

RF CHARACTERISTICS

Number of ways : 3

Frequency range : 0 - 18 GHz Impedance : 50 Ohms

Frequency (GHz)	DC - 3	3 - 8	8 - 12.4	12.4 - 18
VSWR max	1.20	1.30	1.40	1.50
Insertion loss max	0.20 dB	0.30 dB	0.40 dB	0.50 dB
Isolation min	80 dB	70 dB	60 dB	60 dB
Average power (*)	240 W	150 W	120 W	100 W

ELECTRICAL CHARACTERISTICS

Actuator : NORMALLY OPEN

Nominal current ** : 250 mA

Actuator voltage (Vcc) : 12V (10.2 to 13V)

Terminals : 25 pins D-SUB male connector

Indicator rating : 1 W / 30 V / 100 mA

TTL inputs (E) - High level : 2.2 to 5.5 V / 800 μ A at 5.5 V

- Low level : 0 to 0.8 V / 20µA at 0.8 V

MECHANICAL CHARACTERISTICS

Connectors : SMA female per MIL-C 39012 Life : 5 million cycles per position

Switching Time*** : < 15 msConstruction : Splashproof
Weight : < 220 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

(** At 25° C ±10%)

(*** Nominal voltage; 25° C)








SP3T Ramses SMA 18GHz Normally open Indicators 12Vdc TTL Diodes


D-sub connector

PAGE 2/2 ISSUE 22-03-22 SERIE : SPnT PART NUMBER : R573412325


DRAWING



TTL input	RF Continuity	Ind.
E1 = 1	$IN \leftrightarrow 1$	D.E
E2 = 1	$IN \leftrightarrow 2$	D.F
E3 = 1	$IN \leftrightarrow 3$	D.G




LABEL





General tolerances : ±0,5 mm [0,02 in]

SCHEMATIC DIAGRAM

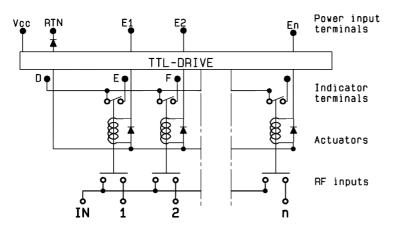

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.