

Description: 2012 2.4-2.5GHz Balun
PART NUMBER: BLN2012LL00R2400A
Features:

- Compact size : 2.00x1.25x0.50mm
- RoHS compliant

Applications:

- WLAN, 802.11a/b/g/n
- Bluetooth
- ISM Band

ELECTRICAL SPECIFICATIONS

DESCRIPTION	Value
Pass Band	2400~2500 MHz
Unbalanced Impedance	50Ω
balanced Impedance	50Ω
Insertion Loss	1.3 dB (Max.) at -40 ~ 85°C
V.S.W.R / Return Loss	2.0(Max) / 10 dB (Min.)
Phase Difference	180 ±10 degree
Amplitude Difference	±2 dB (Max)

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
 15255 Innovation Drive #100
 San Diego, CA 92128
 USA
 Tel:1-858-674-8100

Pulse/Larsen Antennas
 18110 SE 34th St Bldg 2 Suite 250
 Vancouver, WA 98683
 USA
 Tel: 1-360-944-7551

Europe Headquarters
 Pulse GmbH & Do, KG
 Zeppelinstrasse 15
 Herrenberg, Germany
 Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
 99 Huo Ju Road(#29 Bldg,4th Phase
 Suzhou New District
 Jiangsu Province, Suzhou 215009 PR China
 Tel: 86 512 6807 9998




Description: 2012 2.4-2.5GHz Balun

PART NUMBER: BLN2012LL00R2400A

MECHANICAL DIMENSION

Outline

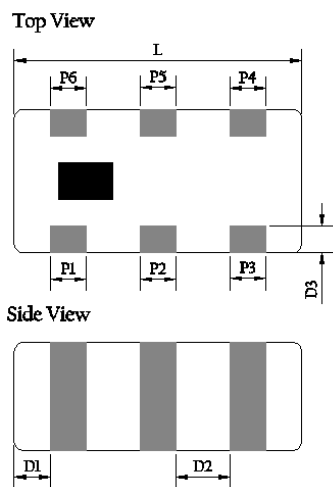

Termination

Terminal name	function
P1	Unbal.
P2	GND
P3	Balanced
P4	Balanced
P5	GND
P6	Not Connect

Mechanical

	Dimension
L (mm)	2.00 ±0.15
W (mm)	1.25 ±0.15
T (mm)	0.50 ±0.15
P1 (mm)	0.40 ±0.15
P2 (mm)	0.40 ±0.15
P3 (mm)	0.40 ±0.15
P4 (mm)	0.40 ±0.15
P5 (mm)	0.40 ±0.15
P6 (mm)	0.40 ±0.15
D1 (mm)	0.20 ±0.05
D2 (mm)	0.20 ±0.15
D3 (mm)	0.25 ±0.15

Reference design of EVB

Figure	Dimension	Remark
	D1	1.0 ±0.1mm
	D2	0.8 ±0.1mm
	D3	0.35 ±0.1mm
	D4	0.65 ±0.1mm
	D5	0.25 ±0.1mm
	D6	0.25 ±0.1mm
		Land Through hole

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.


In the effort to improve our products, we reserve the right to make changes judged to be necessary.
CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 2012 2.4-2.5GHz Balun

PART NUMBER: BLN2012LL00R2400A

ELECTRICAL PERFORMANCES

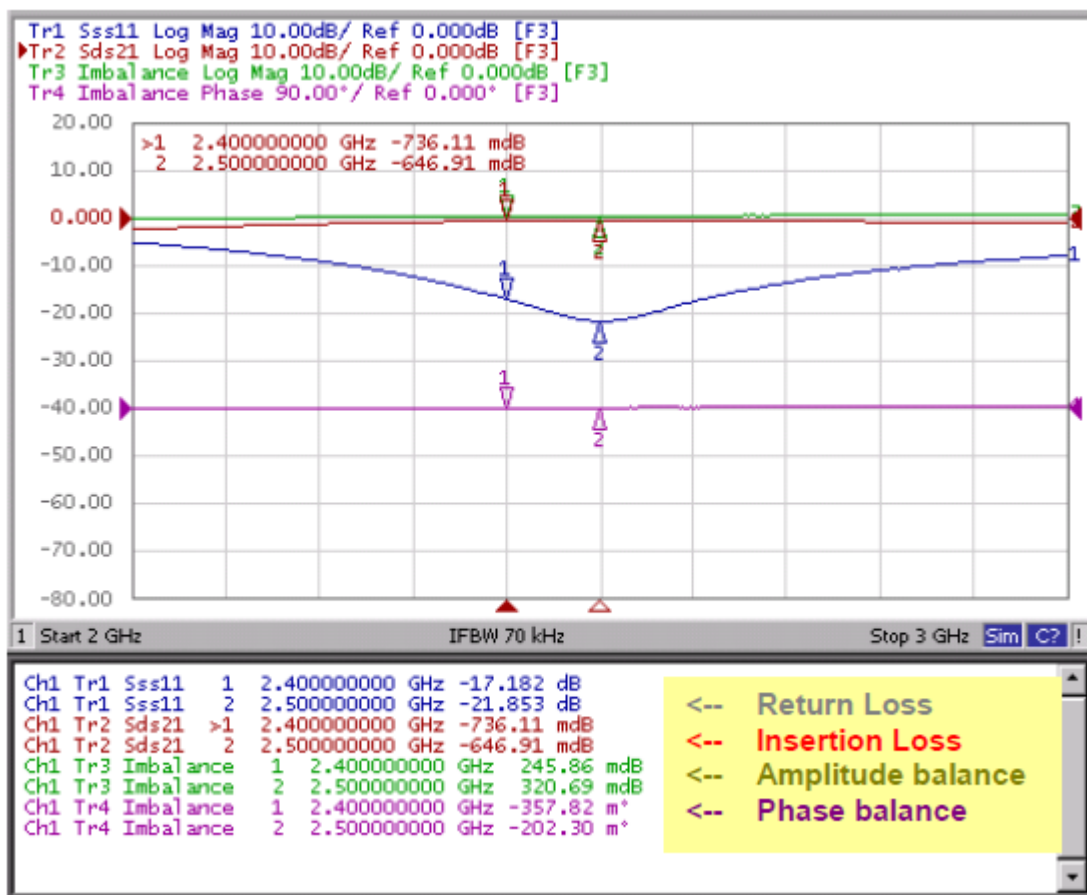

- Measured on Agilent E5071C Network Analyzer
- Unbalanced port return loss (S11)
- Insertion loss (S21, differential port to single-ended port) and
- Imbalance (S21/S31 amplitude and phase difference)

Frequency Characteristics

Description: 2012 2.4-2.5GHz Balun

PART NUMBER: BLN2012LL00R2400A

REVISION HISTORY

Revision	Date	Description
Version 1	Oct. 06, 2020	- New issue