


Snap-in plug; 4-pole; Cod. B; 4,00 mm<sup>2</sup>; light green

www.wago.com/770-774



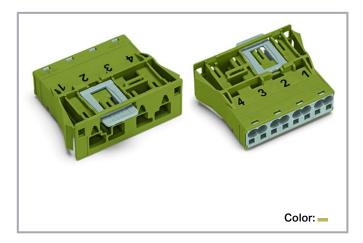

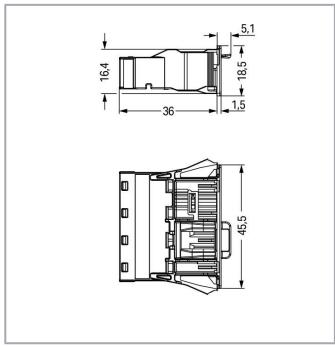

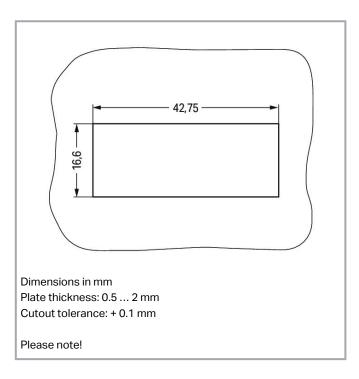

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-774



#### Item description

#### Male connector/plug WINSTA® MIDI with protection against mismating

The WINSTA® MIDI male connector/plug B coding allows assembly of fine-stranded and solid conductors. Whether on PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to many different requirements in seconds. For greater protection in electrical installations, the pluggable installation connector is provided with mechanical protection against mismating. The pluggable installation connector is protected against ingress by solid objects in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). Solutions like the WINSTA® MIDI pluggable installation connectors with B coding are suitable for process control, such as for lighting or within data networks. The rated current and voltage are important criteria for selecting a pluggable installation connector: They tell us about the product's domains of use. This product has a current rating of 25 A – so it is also suitable for robust loads. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in can be found in a variety of projects you can use for quick, easy and maximally flexible installation.

## Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It ensures fast, secure and, above all, error-free installation of components and cables. Choose quality and durability – with locking lever from WAGO makes the installation of electrical components significantly easier.

- effective protection against mismating
- simple circuits
- with B coding for use in automation of processes, such as lighting technology, for example
- exact dimensions
- rapid, structured electrical installation

#### Data Notes

Note

The snap-in connectors must be relieved of tensile and transverse forces.

A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts.

The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-774



Variants: Other pole markings

Other versions (or variants) can be requested from WAGO Sales or

configured at https://configurator.wago.com/.

#### Electrical data

#### Ratings per IEC/EN

| Ratings per                   | IEC/EN 60664-1  |
|-------------------------------|---|
| Nominal voltage (III/3)       | 400 V   |
| Rated impulse voltage (III/3) | 6 kV  |
| Rated current                 | 25 A  |
| Legend (ratings)              | (III / 3) ≙ Overvoltage category III / Pollution degree 3 |

#### Ratings per IEC/EN - Notes

| Note (rated current) | 25 A for 3-pole load |
|----------------------|----------------------|
|                      | 20 A for 4-pole load |

#### Ratings per UL 1977

| Note for the US market  | Some versions may also be used for current interruption in     |
|-------------------------|--|
|                         | accordance with the UL certificate in select applications with |
|                         | currents below 16 A and voltages up to 600 V. For further      |
|                         | information, please contact your local sales office.           |
| Rated voltage (UL 1977) | 600 V  |
| Rated current UL 1977   | 23 A   |

#### **General information**

| Note on contact resistance | approx. 1 $m\Omega$ of contact resistance              |
|----------------------------|--|
|                            | approx. 0.25 m $\Omega$ contact transition plug/socket |

#### Connection data

| Connection points          | 8 |
|----------------------------|---|
| Total number of potentials | 4 |

#### Connection 1

| Connection technology | Push-in CAGE CLAMP <sup>®</sup> |
|-----------------------|---------------------------------|
| Actuation type        | Operating tool Push-in          |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Do you have any questions about our products? Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-774



| 4 mm <sup>2</sup> / 12 AWG |
|----------------------------|
| 0.5 4 mm² / 20 12 AWG      |
| 1.5 4 mm² / 16 12 AWG      |
| 0.5 2.5 mm² / 20 14 AWG    |
| 0.5 4 mm² / 20 12 AWG      |
| 0.25 1.5 mm² / 20 16 AWG   |
| 0.25 2.5 mm² / 20 14 AWG   |
| 1.5 mm² / 16 AWG           |
| 9 mm / 0.35 inches         |
| 4                          |
| 0°                         |
|                            |

#### Physical data

| Pin spacing | 10 mm / 0.394 inches   |
|-------------|------------------------|
| Width       | 45.5 mm / 1.791 inches |
| Height      | 18.5 mm / 0.728 inches |
| Depth       | 41.1 mm / 1.618 inches |

#### **Mechanical Data**

| Application                             | Control technology  |
|---|---|
| Coding                                  | В   |
| Variable coding                         | Yes   |
| Marking                                 | 4321  |
| Potential marking                       | 4321  |
| Mating force of a plug-in connection    | approx. 20 70 N (depending on pole number)  |
| Retention force of a plug-in connection | Locked: > 80 N  |
| Unmating force of a plug-in connection  | Unlocked: approx. 20 70 N (depending on pole number)  |
| Number of mating cycles                 | 200, without resistive load   |
| Housing sheet thickness                 | 0.5 2 mm / 0.02 0.079 inches  |
| Mounting type                           | Snap-in flange  |
| Protection type                         | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

#### Plug-in connection

| Contact type (pluggable connector) | Male connector/plug |
|------------------------------------|---------------------|
| Connector (connection type)        | for conductor       |
| Mismating protection               | Yes                 |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-774



| Note on mismating protection  | All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole  |
|-------------------------------|--|
| Locking lever                 | yes  |
| Locking of plug-in connection | locking lever  |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |

#### Material data

Note (material data)

Information on material specifications can be found here

| Color                       | light green                             |
|-----------------------------|---|
| Insulation material         | Polyamide (PA66)                        |
| Flammability class per UL94 | V0                                      |
| Clamping spring material    | Chrome-nickel spring steel (CrNi)       |
| Contact material            | Copper or copper alloy; surface-treated |
| Contact plating             | Tin                                     |
| Fire load                   | 0.316 MJ                                |
| Weight                      | 15.9 g                                  |
|                             |   |

#### **Environmental requirements**

| Processing temperature                   | -5 +40 °C                                  |
|--|--|
| Continuous operating temperature         | -35 +85 ℃                                  |
| Note on continuous operating temperature | Insulating parts for temperatures ≤ 105 °C |

#### Commercial data

| Product Group | 20 (Winsta) |
|---------------|-------------|
| eCl@ss 10.0   | 27-44-06-02 |
| eCl@ss 9.0    | 27-44-06-02 |
| ETIM 8.0      | EC002566    |
| ETIM 7.0      | EC002566    |
| ECCN          | NO DATA     |

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-774



| PU (SPU)              | 100 pcs       |  |
|-----------------------|---------------|--|
| Packaging type        | box           |  |
| Country of origin     | DE            |  |
| GTIN                  | 4050821458197 |  |
| Customs tariff number | 85366990990   |  |

RoHS Compliance Status Compliant, No Exemption

#### Approvals / Certificates

#### General approvals

| Logo           | Approval                                    | Additional Approval Text | Certificate<br>name |
|----------------|---|--------------------------|---------------------|
|                | CCA DEKRA Certification B.V.                | IEC 61984                | NL-32104            |
| KEMA           | CCA DEKRA Certification B.V.                | EN 61984                 | 2173495.01          |
| c <b>71</b> 2° | <b>cURus</b> Underwriters Laboratories Inc. | UL 1977                  | E45171              |

UL 1059



**cURus** Underwriters Laboratories Inc.

#### Declarations of conformity and manufacturer's declarations

|            |  |                          | Certificate |
|------------|--|--------------------------|-------------|
| Logo       | Approval   | Additional Approval Text | name        |
| $\epsilon$ | EU-Declaration of Conformity<br>WAGO GmbH & Co. KG | -                        | -           |
| UK         | WAGO GmbH & Co. KG                                 | -                        | -           |

#### Approvals for marine applications

Certificate

E 45172

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-774



| Logo               | Approval   | Additional Approval Text | name                     |
|--------------------|--|--------------------------|--------------------------|
| ABS.               | ABS American Bureau of Shipping                      | -                        | 19-<br>HG1868589-<br>PDA |
| ONV.COM/AF         | <b>DNV GL</b> Det Norske Veritas, Germanischer Lloyd | -                        | TAE00001Z6               |
| GO LA THE METANIA. | <b>LR</b><br>Lloyds Register                         | IEC 61984                | LR22429487TA             |

#### Counterpart

| Will state | Item no.770-264<br>Socket; 4-pole; Cod. B; 4,00 mm²; light green   | www.wago.com/770-264              |
|------------|--|-----------------------------------|
|            | Item no.771-9994/005-105  pre-assembled interconnecting cable; Eca; Socket/plug; 4-pole; Cod. B; H05VV-F 4 x 1.0 mm²; 1 m; 1,00 mm²; light green       | www.wago.com/771-9994<br>/005-105 |
|            | Item no.771-9994/105-105 pre-assembled connecting cable; Eca; Socket/open-ended; 4-pole; Cod. B; Control cable 4 x 1.0 mm²; 1 m; 1,00 mm²; light green | www.wago.com/771-9994<br>/105-105 |

| =  | ccessories  |                      |
|--|---|----------------------|
| Cover  |   |                      |
| Cover  |   |                      |
|  | Item no.: 770-694                                 | /770.004             |
|  | Lockout cap; 4-pole; for cutouts; Plastic; white  | www.wago.com/770-694 |
|  | Item no.: 770-644                                 | WWW.Wago.com/770.644 |
|  | Lockout cap; 4-pole; for cutouts; Plastic; black  | www.wago.com/770-644 |
| THE STATE OF THE S | Item no.: 770-360                                 |                      |
| A. T.  | Lockout cap; for plugs; 5-pole; separable; yellow | www.wago.com/770-360 |
| Coding   |   |                      |
| Coding   |   |                      |
|  | Item no.: 770-401                                 |                      |
|  | Coding pin; for plugs; Plastic; gray              | www.wago.com/770-401 |
| ГооІ   |   |                      |
| Operating t  | ool   |                      |

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-774





Item no.: 210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

www.wago.com/210-719

## Downloads Documentation

#### **Bid Text**

| 770-774<br>X81 - Datei | 2019 Feb 19 | xml<br>3.0 kB  | Download |
|------------------------|-------------|----------------|----------|
| 770-774<br>doc - Datei | 2015 Jun 8  | doc<br>24.1 kB | Download |

#### CAD/CAE-Data

#### CAD data

| 2D/3D Models 770-774               | URL | Download |
|------------------------------------|-----|----------|
| CAE data                           |     |          |
| EPLAN Data Portal 770-774          | URL | Download |
| WSCAD Universe 770-774             | URL | Download |
| ZUKEN Portal 770-774               | URL | Download |
| Asset Administration Shell         |     |          |
| Asset Administration Shell 770-774 | URL | Download |

#### **Environmental Product Compliance**

#### **Compliance Search**

| Environmental Product Compliance 770-774            | URL | Download |
|---|-----|----------|
| Snap-in plug; 4-pole; Cod. B; 4,00 mm²; light green |     |          |


 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden


Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

# W/AGO


#### **Installation Notes**

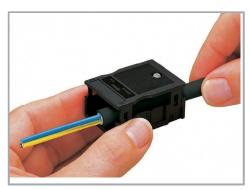


We recommend pulling the pre-latched strain relief housing over the cable prior to termination. However, the strain relief can be mounted at a later time as well.



- 1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)
- 2. Strip length = 9 mm
- 3. Extended ground conductor = 8 mm



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.




Insert the stripped solid conductor until it hits the backstop.


 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

www.wago.com/770-774





To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.



To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.

#### **Product family**

WINSTA® MIDI
Show all products from the family

 $\label{lem:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$