

Socket; 5-pole; Cod. A; 4,00 mm<sup>2</sup>; white

www.wago.com/770-225



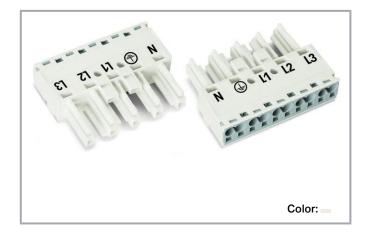

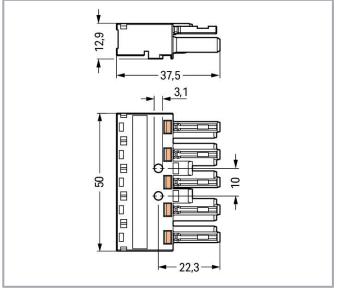

## Item description

#### Female connector/socket WINSTA® MIDI rated current 25 A

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MIDI female connector/socket A coding. WAGO pluggable installation connectors are used when criteria repeat or are planned on a specific pattern, for example for installing grid lighting or flush-mount lighting. For greater protection in electrical installations, the pluggable installation connector is provided with mechanical protection against mismating. The pluggable installation connector is protected against ingress by solid objects in accordance with protection type IP20 (When mated and secured with a strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). Thanks to the color coding and mechanical A coding of WINSTA® MIDI pluggable installation connectors, you can clearly distinguish different circuits. This pluggable installation connector can be used for a voltage load of up to 25 A. Therefore, it can also be used for high power loads. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in a broad range of individual products you can use for quick, easy and maximally flexible electrical installation.

## WINSTA® MIDI solutions for your electrical installation - protected against mismating and maintenance-free

The WINSTA® Pluggable Connection System is perfectly tailored to the strict requirements of building installation. It makes electrical installation pluggable, and therefore more efficient, more reliable, and error-free. Use of this pre-assembled system reduces time spent on assembly and errors

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-225



during installation at the construction site. Now you can also reduce installation expenses without compromising safety and quality: with protection against mismating eliminates the need for servicing and prevents unnecessary downtime.

- protection against mismating eliminates errors
- simple circuits
- with A coding for use in a large number of general mains applications
- flexible installation to save space
- rapid, structured electrical installation

## Data

#### Electrical data

#### Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	400 V
Rated impulse voltage (III/3)	6 kV
Rated current	25 A
Legend (ratings)	(III / 3)

## Ratings per UL 1977

Note for the US market	Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.
Rated voltage (UL 1977)	600 V
Rated current UL 1977	23 A

# General information

Note on contact resistance	approx. 1 m $\Omega$ of contact resistance
	approx. 0.25 m $\Omega$ contact transition plug/socket

## Connection data

Connection points	10
Total number of potentials	5

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-225



## Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
	Push-in
Nominal cross-section	4 mm² / 12 AWG
Solid conductor	0.5 4 mm <sup>2</sup> / 20 12 AWG
Solid conductor; push-in termination	1.5 4 mm² / 16 12 AWG
Stranded conductor	0.5 2.5 mm² / 20 14 AWG
Fine-stranded conductor	0.5 4 mm² / 20 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 1.5 mm² / 20 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.25 2.5 mm² / 20 14 AWG
Fine-stranded conductor; with ferrule; push-in termination	1.5 mm² / 16 AWG
Strip length	9 mm / 0.35 inches
Pole number	5
Conductor entry direction to mating direction	0°

# Physical data

Pin spacing	10 mm / 0.394 inches
Width	50 mm / 1.969 inches
Height	12.9 mm / 0.508 inches
Depth	37.5 mm / 1.476 inches

## **Mechanical Data**

Application	General mains applications
Coding	A
Variable coding	Yes
Marking	N
Potential marking	N
Mating force of a plug-in connection	approx. 20 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Protection type	IP20; When mated and secured with a strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-225



# Plug-in connection

Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

## Material data

Note (material data)

Information or	material	specifications	can be	found	here
ii ii Oi i ii atioi i oi	material	apecinications.	Carrioe	Touriu	HEIE

Color	white
Cover color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	VO
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.3 MJ
Weight	15.7 g

# **Environmental requirements**

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?



## Commercial data

20 (Winsta)
27-44-06-05
27-44-06-05
EC002560
EC002560
NO DATA
50 pcs
Box
DE
4044918252409
85366990990

# **Environmental Product Compliance**

RoHS Compliance Status Compliant, No Exemption

# Approvals / Certificates

## General approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA	IEC 61535	NL -84761
	DEKRA Certification B.V.		
	CCA	EN 61535	71-
KEMA	DEKRA Certification B.V.		123228
	cURus	UL 1977	E45171
c <b>AN</b> us	Underwriters Laboratories Inc.		
c <b>91</b> 0	cURus Underwriters Laboratories Inc.	UL 1059	E 45172
C PAU	VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40002889

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?



## Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
CE	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
Approvals for	r marine applications		Certificate
Logo	Approval	Additional Approval Text	name
ABS.	ABS American Bureau of Shipping	-	19- HG1868589- PDA
DNV DNVCOMAF	<b>DNV GL</b> Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
DO LA PRODUCTION OF THE PRODUC	LR Lloyds Register	IEC 61984	LR22429487TA

# Counterpart

	Item no.770-135 Plug; with strain relief housing; 5-pole; Cod. A; 4,00 mm²; white	www.wago.com/770-135	
10 mg 9	Item no.770-235 Plug; 5-pole; Cod. A; 4,00 mm²; white	www.wago.com/770-235	
	Item no.770-335 Plug; with strain relief housing; 5-pole; Cod. A; 4,00 mm²; white	www.wago.com/770-335	
	Item no.770-435 Plug; 5-pole; Cod. A; 4,00 mm²; white	www.wago.com/770-435	
	Item no.770-6225 Linect® T-connector; 5-pole; Cod. A; 1 input; 2 outputs; white	www.wago.com/770-6225	

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-225





Item no.770-671

T-distribution connector; 5-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; white

www.wago.com/770-671

Christia	100
W. 100 M	8. 688
1	1
24.000	(Max.)

#### Item no.770-672

T-distribution connector; 5-pole; Cod. A; 1 input; 2 outputs; 3 locking levers; for flying leads; white

www.wago.com/770-672



#### Item no.770-690

Three-phase to single-phase distribution connector; with phase selection; 5-pole/3-pole; Cod. A; 1 input; 5 outputs; white

www.wago.com/770-690



# C. S. C.

# Item no.770-735

Snap-in plug; 5-pole; Cod. A; 4,00 mm²; white

www.wago.com/770-735



#### Item no.770-735/007-000

Snap-in plug; with direct ground contact; 5-pole; Cod. A; 4,00 mm<sup>2</sup>; white

www.wago.com/770-735

/007-000



#### Item no.770-835

Plug for PCBs; straight; 5-pole; Cod. A; white

www.wago.com/770-835



#### Item no.770-835/011-000

Plug for PCBs; angled; 5-pole; Cod. A; white

www.wago.com/770-835

/011-000



## Item no.771-9995/006-102

pre-assembled interconnecting cable; Eca; Socket/plug; 5-pole; Cod. A; H05VV-F 5G 1.5 mm²; 1 m; 1,50 mm²; white

www.wago.com/771-9995

/006-102



#### Item no.771-9995/206-102

pre-assembled connecting cable; Eca; Plug/open-ended; 5-pole; Cod. A; H05VV-F 5G 1.5 mm²; 1 m; 1,50 mm²; white

www.wago.com/771-9995

/206-102



## Item no.899-681/100-000

Distribution box; Three-phase to single-phase current (400 V/230 V); 1 input; 7 outputs; Cod. A; MIDI; white

www.wago.com/899-681

/100-000



## Item no.899-681/105-000

Distribution box; Three-phase to single-phase current (400 V/230 V); 1 input; 6 outputs; Cod. A; MIDI; white

www.wago.com/899-681

/105-000



#### Item no.899-681/144-000

Distribution box; Three-phase to single-phase current (400 V/230 V); 2 inputs; 6 outputs; Cod. A; MIDI; white

www.wago.com/899-681

/144-000

### Required accessories

Cover

Cover

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-225





Item no.: 770-201

Lockout cap; 12-pole, separable; for sockets; Plastic; black

www.wago.com/770-201

L. F. B. P. B. L. L. S. L. S.

Item no.: 770-221

Lockout cap; 12-pole, separable; for sockets; Plastic; white

www.wago.com/770-221

Strain relief

Strain relief housing



Item no.: 770-505/021-000

Strain relief housing; 5-pole; for 1 cable; 11.5 ... 16.5 mm; 71 mm; black

www.wago.com/770-505

/021-000

Item no.: 770-505/023-000

Strain relief housing; 5-pole; for 2 cables; 5.0 ... 9.0 mm; 55 mm; black

www.wago.com/770-505

/023-000

Item no.: 770-505

Strain relief housing; 5-pole; for 2 cables; 9.0 ... 13.0 mm; 55 mm; black

www.wago.com/770-505

( ) and

Item no.: 770-515

Strain relief housing; 5-pole; for 2 cables; 9.0 ... 13.0 mm; 55 mm; white

www.wago.com/770-515

Item no.: 770-515/023-000

Strain relief housing; 5-pole; for 2 cables; 5.0 ... 9.0 mm; 55 mm; white

www.wago.com/770-515

/023-000

War or

Item no.: 770-515/021-000

Strain relief housing; 5-pole; for 1 cable; 11.5 ... 16.5 mm; 71 mm; white

www.wago.com/770-515

/021-000

Locking levers

Locking system



Item no.: 770-121

Locking lever; for flying leads; for manual operation; white

www.wago.com/770-121

Item no.: 770-131

Locking lever; for flying leads; for tool operation; white

www.wago.com/770-131

Item no.: 770-101

Locking lever; for flying leads; for manual operation; black

www.wago.com/770-101

Item no.: 770-111

Locking lever; for flying leads; for tool operation; black

www.wago.com/770-111

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com



## Optional accessories

Cover		
Cover		
	Item no.: 897-2005	
	Protective cap; Type4; for sockets and plugs; PVC; red	www.wago.com/897-2005
larking acce	essories	
Marker		
	Item no.: 770-450/000-002	www.wago.com/770-450
in-	Marker card; Plastic; yellow	/000-002
	Item no.: 770-450/000-001	www.wago.com/770-450
Ip	Marker card; Plastic; green	/000-001
	Item no.: 770-450/000-005	www.wago.com/770-450
Mo	Marker card; Plastic; red	/000-005
	Item no.: 770-450	www.wago.com/770-450
i	Marker card; Plastic; white	
	Item no.: 770-450/000-006	www.wago.com/770-450
1	Marker card; Plastic; blue	/000-006
	Item no.: 770-450/000-012	www.wago.com/770-450
h	Marker card; Plastic; orange	/000-012
lounting		
Mounting a	ccessories	
	Item no.: 770-320	www.wago.com/770-320
• •	Snap-in frame; 5-pole; 1.0 3.0 mm; black	
	Item no.: 770-321	<b>/</b>
	Snap-in frame; 5-pole; 0.5 2.0 mm; black	www.wago.com/770-321
	Item no.: 770-340	www.wago.com/770-340
	Snap-in frame; 5-pole; 1.0 3.0 mm; white	
	Item no.: 770-341	www.wago.com/770-341
	Snap-in frame; 5-pole; 0.5 2.0 mm; white	
ool		

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-225



## Wiring aid



Item no.: 770-100

Wiring aid; 2- to 5-pole; Plastic; orange

www.wago.com/770-100

#### Operating tool



Item no.: 210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

www.wago.com/210-719

# Downloads

#### Documentation

#### **Bid Text**

770-225	2019 Feb 19	xml 3.0 kB	Download
X81 - Datei		0.0 KB	
770-225 doc - Datei	2015 Jun 8	doc 23.6 kB	Download

## CAD/CAE-Data

#### CAD data

2D/3D Models 770-225	URL	Download
CAE data		
EPLAN Data Portal 770-225	URL	Download
WSCAD Universe 770-225	URL	Download
ZUKEN Portal 770-225	URL	Download
Asset Administration Shell		
Asset Administration Shell 770-225	URL	Download

## **Environmental Product Compliance**

## **Compliance Search**

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com




Environmental Product Compliance 770-225 Socket; 5-pole; Cod. A; 4,00 mm²; white


## URL Download

## **Installation Notes**


#### Conductor termination




- 1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)
- 2. Strip length = 9 mm
- 3. Extended ground conductor = 8 mm

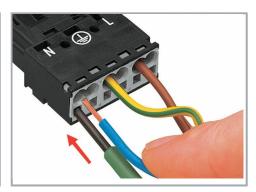

To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.



Insert the stripped solid conductor until it hits the backstop.



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.

#### Conductor removal


 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com


www.wago.com/770-225






To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.


#### Installation



We recommend pulling the pre-latched strain relief housing over the cable prior to termination. However, the strain relief can be mounted at a later time as well.



Latch the strain relief housing onto the plug /socket. Note the "TOP" inscription.

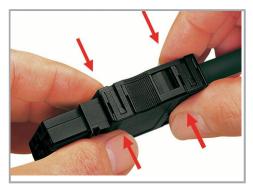

Prepare strain relief housing by snapping together upper and bottom part.



Tighten strain relief screw with screwdriver (2.5 mm blade width).

## **Product family**

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-225



WINSTA® MIDI

Show all products from the family

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com