MSKSEMI 美森科



ESD





TCC



MOV



GDT



PIFF

MMBT3904DFN

Product specification





Features

- Low profile package
- Ideal for automated placement
- Low saturation voltages
- High voltage capability
- High Stability and High Reliability
- RoHS Compliant

Applications

- amplifying signal
- Electronic switch
- Oscillating circuit
- Variable resistance
- Lighting applications

Appearance & Symbol

PACKAGE OUTLINE	Pin Configuration	Marking
1: Base 2: Emitter 3: Collector	Base	6P
DFN1006-3		



Absolute Maximum Ratings (T=25℃ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	Vсво	60	V
Collector-Emitter Voltage	Vceo	40	V
Emitter-Base Voltage	V _{EBO}	6	V
Collector Current Continuous	Ic	0.2	A
Power Dissipation	P _D	0.3	W
Operating Junction temperature	TJ	-55 to +150	℃
Storage Temperature Range	T _{STG}	-55 to +150	℃

Electrical Characteristics (T=25°C unless otherwise noted)


Parameter	Symbol	Test conditions	Min	Тур	Max	Unit
Collector-Base Breakdown Voltage	V _{CBO}	I _C =10μΑ,I _E =0	60			V
Collector-Emitter Breakdown Voltage	V _{CER}	I _C =1mA,I _B =0	40			V
Emitter-Base Breakdown Voltage	V _{EBO}	I _E =10uA,I _C =0	6			V
Collector Cut-Off Current	I _{CBO}	V _{CB} =60V, I _E =0			100	nA
Collector Cut-Off Current	I _{CEX}	V _{CE} =30V,V _{EB(off)} =3V			50	nA
Emitter Cut-Off Current	I _{EBO}	V _{EB} =5V,I _C =0			100	nA
	V _{CE} =1V,I _d V _{CE} =1V,I _d V _{CE} =1V,I _d	V _{CE} =1V,I _C =0.1mA	40			
		V _{CE} =1V,I _C =1mA	70			
DC current gain		V _{CE} =1V,I _C =10mA	100		300	
		V _{CE} =1V,I _C =50mA	60			
		V _{CE} =1V,I _C =100mA	30			
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =50mA, I _B =5mA			0.3	V
Base -emitter saturation voltage	V _{BE(sat)}	I _C =50mA, I _B =5mA			0.95	V
Transition frequency	f⊤	V _{CE} = 20V, I _C =10mA,f=100MHz	300			MHZ
Delay Time	td	V _{CC} =3V, I _C = 10mA,		35		
Rise time	tr	$V_{BE(off)}$ =-0.5V, I_{B1} =1mA		35		ns
Storage time	ts	V _{CC} =3V, I _C =10mA,		200		us
Fall time	tf	$I_{B1} = I_{B2} = 1 \text{mA}$		50		ns

Classification of hee

Range	100-300
-------	---------




Typical Characteristics

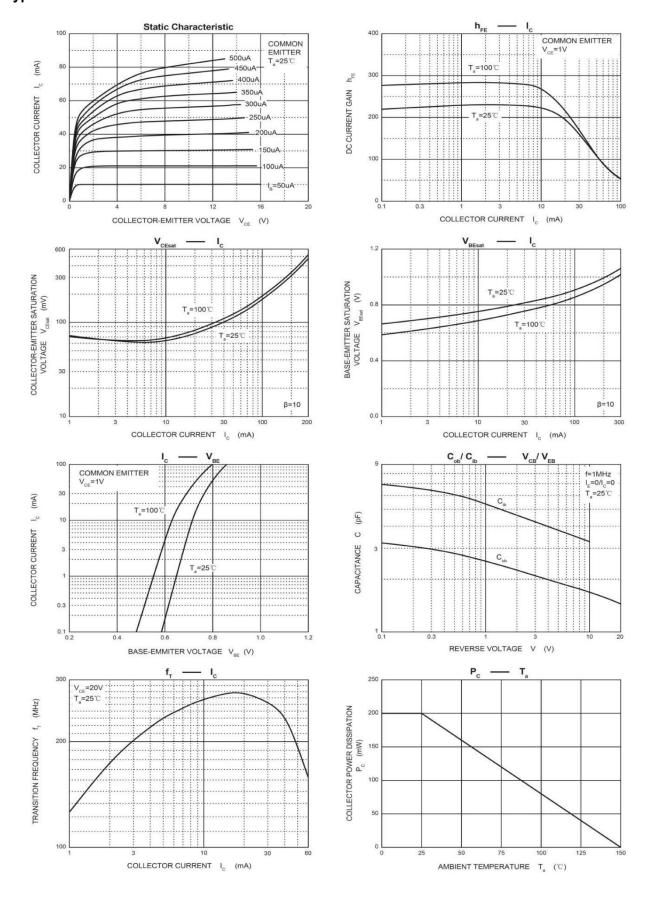




Soldering parameters

Reflow Condition		Pb-Free assembly (see as bellow)
	-Temperature Min (T _{s(min)})	+150℃
Pre Heat	-Temperature Max(T _{s(max)})	+200℃
riorioat	-Time (Min to Max) (ts)	60-180 secs.
Average	ramp up rate (Liquid us Temp (T _L) to peak)	3℃/sec. Max
	T _{s(max)} to T _L - Ramp-up Rate	3°C/sec. Max
	-Temperature(T _∟) (Liquid us)	+217℃
Reflow	-Temperature(t _∟)	60-150 secs.
	Peak Temp (T _p)	+260(+0/-5)°C
Tir	me within 5℃ of actual Peak Temp (tր)	30 secs. Max
Ramp-down Rate		6℃/sec. Max
	Time 25℃ to Peak Temp (T _P)	8 min. Max
Do not exceed		+260℃

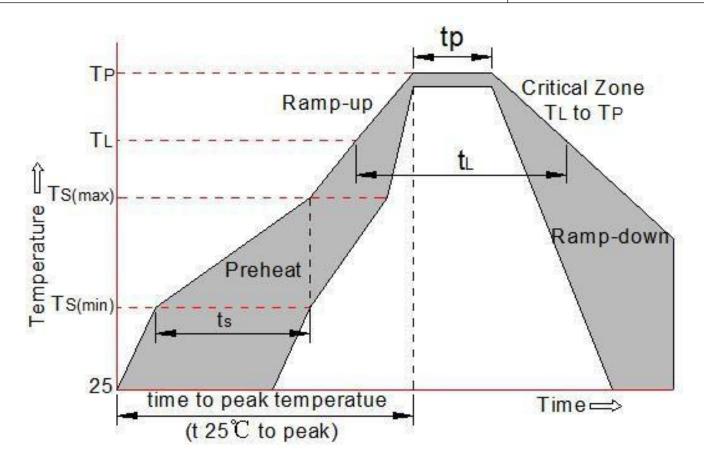




Package mechanical data

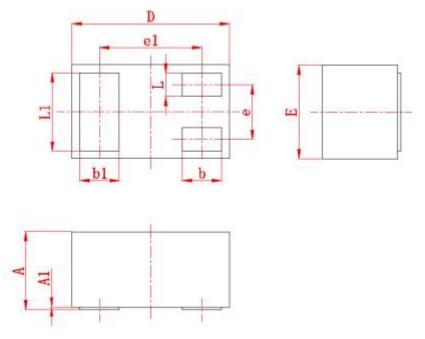

Symbol	Millimeters		
	min	max	
А	0.4	0.5	
A1	0	0.05	
D	0.9	1.1	
Е	0.55	0.65	
е	(0.35)		
e1	(0.65)		
b	0.2	0.3	
b1	0.2	0.3	
L	0.1	0.2	
L1	0.45	0.55	

Suggested Land Pattern



Symbol	Dimension in Millimeters	
	typ	
X1	(0.3)	
X2	(0.35)	
Y1	(0.2)	
Y2	(0.6)	
Z	(0.4)	
Р	(0.7)	

REEL SPECIFICATION

P/N	PKG	QTY
MMBT3904DFN	DFN1006-3	10000



Attention

- Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.
- MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all MSKSEMI Semiconductor products described or contained herein.
- Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer'sproducts or equipment.
- MSKSEMI Semiconductor. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with someprobability. It is possiblethat these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits anderror prevention circuitsfor safedesign, redundant design, and structural design.
- In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from theauthorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. Whendesigning equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor productthat you intend to use.