



TRIPLE BUFFER WITH OPEN-DRAIN OUTPUTS

Description


The 74LVC3G07 is a triple buffer with open-drain outputs. The device is designed for operation with a power supply range of 1.65V to 5.5V. The inputs are tolerant to 5.5V allowing this device to be used in a mixed voltage environment. The device is fully specified for partial power down applications using I_{OFF}. The I_{OFF} circuitry disables the output preventing damaging current backflow when the device is powered down.


Each of the buffers performs the positive Boolean function:

Y = A

A pullup resistor is required for a logical HIGH output.

Pin Assignments





Features

- Wide Supply Voltage Range from 1.65V to 5.5V
- -24mA Output Drive at 3.3V
- CMOS Low-Power Consumption
- I_{OFF} Supports Partial Power Down Mode Operation
- Inputs Accept up to 5.5V
- ESD Protection Tested per JESD 22
 Exceeds 2,000V Human Body Model (A114)
 Exceeds 1,000V Charged Device Model (C101)
- Latch-Up Exceeds 100mA per JESD 78, Class I
- Range of Package Options
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please <u>contact us</u> or your local Diodes representative. https://www.diodes.com/quality/product-definitions/

Applications

- · Voltage-level shifting
- General-purpose logic
- · Power down signal isolation
- Wide array of products such as:
 - · PCs, networking, notebooks, netbooks, PDAs
 - Computer peripherals, hard drives, CD/DVD ROM
 - · TV, DVD, DVR, set top boxes
 - · Cell phones, personal navigation/GPS
 - · MP3 players, cameras, video recorders

Notes:


- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.



Pin Descriptions

Pin Name	Pin NO.	Description		
1A	1	Data Input		
3Y	2	Data Output		
2A	3	Data Input		
GND	4	Ground		
2Y	5	Data Output		
3A	6	Data Input		
1Y	7	Data Output		
Vcc	8	Supply Voltage		

Logic Diagram



Function Table

Inputs	Output
Α	Y
Н	Z
L	L

Absolute Maximum Ratings (Notes 4, 5)

Symbol	Description	Rating	Unit
ESD HBM	Human Body Model ESD Protection	2	kV
ESD CDM	Charged Device Model ESD Protection	1	kV
Vcc	Supply Voltage Range	-0.5 to 6.5	V
Vı	Input Voltage Range	-0.5 to 6.5	V
Vo	Voltage Applied to Output in High Impedance or Ioff State	-0.5 to 6.5	V
Vo	Voltage Applied to Output in High or Low State	-0.5 to 6.5	V
lıĸ	Input Clamp Current V _I < 0	-50	mA
Іок	Output Clamp Current Vo < 0	-50	mA
lo	Continuous Output Current	±50	mA
ICC, IGND	Continuous Current Through Vcc or GND	±100	mA
TJ	Junction Temperature	+150	°C
T _{STG}	Storage Temperature	-65 to +150	°C

Notes:

- 4. Stresses beyond the absolute maximum can result in immediate failure or reduced reliability. These are stress values and device operation should be within recommend values.5. Forcing the maximum allowed voltage could cause a condition exceeding the maximum current or conversely forcing the maximum current could cause a condition exceeding the maximum voltage. The ratings of both current and voltage must be maintained within the controlled range.



Recommended Operating Conditions (Note 6)

Symbol	Parameter	Conditions	Min	Max	Unit	
\ /	Operating Voltage	Operating	1.65	5.5	V	
Vcc	Operating Voltage	Data Retention Only	1.5	_	V	
		Vcc = 1.65V to 1.95V	0.65 X Vcc	_		
	Librat Lavial Individual College	Vcc = 2.3V to 2.7V	1.7	_	V	
ViH	High-Level Input Voltage	Vcc = 3V to 3.6V	2	_	V	
		Vcc = 4.5V to 5.5V	0.7 X Vcc	_		
		V _{CC} = 1.65V to 1.95V	_	0.35 X V _{CC}		
.,		Vcc = 2.3V to 2.7V	_	0.7	V	
VIL	Low-Level Input Voltage	Vcc = 3V to 3.6V	_	0.8	V	
		V _{CC} = 4.5V to 5.5V	_	0.3 X V _{CC}		
VI	Input Voltage	_	0	5.5	V	
Vo	Output Voltage	_	0	Vcc	V	
		Vcc = 1.65V	_	4		
		Vcc = 2.3V	_	8		
loL	Low-Level Output Current		_	16	mA	
		Vcc = 3V	_	24		
		Vcc = 4.5V	_	32		
		Vcc = 1.8V ± 0.15V, 2.5V ± 0.2V	_	20		
Δt/ΔV	Input Transition Rise or Fall Rate	V _{CC} = 1.65V to 2.7V	_	10	ns/V	
		V _{CC} = 2.7V to 5V	_	5		
TA	Operating Free-Air Temperature	_	-40	+125	°C	

Note: 6. Unused inputs should be held at V_{CC} or Ground for device proper operation.



Electrical Characteristics

Symbol	Parameter	Test Conditions	Vcc	-40°C to -	+85ºC	-40°C to +	-125ºC	Unit
Syllibol	Farameter	rest Conditions	VCC	Min	Max	Min	Max	Onit
		I _{OL} = 100μA	1.65V to 5.5V	_	0.1	_	0.1	
		I _{OL} = 4mA	1.65V	_	0.45	_	0.45	
Vai	Low Lovel Output Voltage	IoL = 8mA	2.3V	_	0.3	_	0.3	V
VOL	VoL Low-Level Output Voltage	IoL = 16mA	3V	_	0.4	_	0.4	V
		IoL = 24mA	30	_	0.55	_	0.75	
		I _{OL} = 32mA	4.5V	_	0.55	_	0.75	
lı	Input Current	V _I = 5.5V or GND	0 to 5.5V	_	±5	_	±5	μA
loff	Power Down Leakage Current	V_1 or $V_0 = 5.5V$	0	_	±10	_	±10	μA
Icc	Supply Current	$V_I = 5.5V$ or GND, $I_0 = 0$	1.65V to 5.5V	_	10	_	10	μA
ΔΙσο	Additional Supply Current	Input at Vcc - 0.6V	3V to 5.5V	_	500	_	500	μA
Cı	Input Capacitance	VI = Vcc or GND	3.3V	_	3.5 (Typ)	_	_	pF

Package Characteristics

Symbol	Parameter	Package	Test Conditions	Min	Тур	Max	Unit
0	Thermal Resistance Junction-to-Ambient	SSOP-8	Note 7	_	130	_	°C/W
ӨЈА	Thermal Resistance Junction-to-Ambient	VSSOP-8	Note 7	_	155	_	°C/W
0.5	Thermal Resistance Junction-to-Case	SSOP-8	Note 7	_	36	_	°C/W
Өлс	Thermal Nesistance Junction-to-Case	VSSOP-8	Note 7	_	38	_	°C/W

Note: 7. Test condition: Device mounted on JEDEC 2s2p High-K board, FR-4 substrate PCB, 2oz copper with minimum recommended pad layout.

Operating Characteristics (TA = +25°C, VCC = 3.3V)

Symbol	Parameter	Test Conditions	V _{CC} = 1.8V Typ	V _{CC} = 2.5V Typ	V _{CC} = 3.3V Typ	V _{CC} = 5V Typ	Unit
C _{PD}	Power Dissipation Capacitance	f = 10MHz, 1 Input Switching	3	3	4	5	pF


Switching Characteristics

Figure 1

Parameter	From	То	V	T _A = -40°C	to +85°C	$T_A = -40^{\circ}C$	to +125°C	Unit	
Parameter	Input	Output	V _{CC}	Min	Max	Min	Max	Oilit	
	A Y			1.8V ± 0.15V	1.5	7.8	1.5	8.3	
		Y	2.5V ± 0.2V	1	4.3	1	4.8		
t _{PD}			3.3V ± 0.3V	1	3.7	1	4.2	ns	
		5.0V ± 0.5V	1	2.9	1	3.4			



Parameter Measurement Information (Notes B, C)



TEST	Condition
tpLz (see Notes D and F) tpzL (see Notes D and E)	Vload Vload

Vcc	Inputs		Vm	VLOAD	CL	R∟	V Δ
	Vı	t _r /t _f					
1.8V ± 0.15V	Vcc	≤2ns	Vcc / 2	2 X Vcc	30pF	1kΩ	0.15V
2.5V ± 0.2V	Vcc	≤2ns	Vcc / 2	2 X Vcc	30pF	500Ω	0.15V
3.3V ± 0.3V	3V	≤2.5ns	1.5V	6V	50pF	500Ω	0.3V
$5V \pm 0.5V$	Vcc	≤2.5ns	V _{CC} / 2	2 X V _{CC}	50pF	500Ω	0.3V

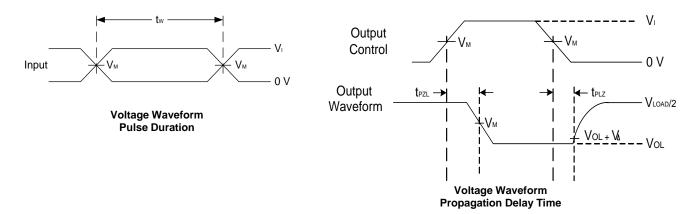



Figure 1. Load Circuit and Voltage Waveforms

Notes: A. Includes test lead and test apparatus capacitance.

- B. All pulses are supplied at pulse repetition rate ≤ 10MHz.
- C. The inputs are measured one at a time with one transition per measurement.
- D. For the open drain device t_{PLZ} and t_{PZL} are the same as t_{PD} .
- E. t_{PZL} is measured at V_{M} .
- F. t_{PLZ} is measured at V_{OL} + V_{Δ} .



Ordering Information

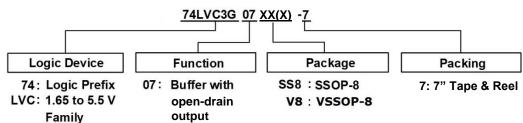

3G: Triple Gate


5 (1)	Basham Oats Basham			king
Part Number	Package Code	Package	Qty.	Carrier
74LVC3G07SS8-7	SS8	SSOP-8	3000	7" Tape and Reel (Note 8)
74LVC3G07V8-7	V8	VSSOP-8	3000	7" Tape and Reel (Note 8)

Note: 8. The taping orientation is located on our website at http://www.diodes.com/package-outlines.html.

Marking Information

SSOP-8

(Top View)



2 3 4

Y: Year: 0 to 9

<u>W</u>: Week: A to Z: 1 to 26 week;

a to z: 27 to 52 week; z represents 52 and 53 week

X: Internal Code

Part Number	Package	Identification Code
74LVC3G07SS8-7	SSOP-8	S3G07

VSSOP-8

(Top View)



 $\underline{\underline{Y}}$: Year : 0 to 9 $\underline{\underline{W}}$: Week : A to Z : 1 to 26 week;

a to z: 27 to 52 week; z represents

52 and 53 week X: Internal Code


Part Number	Package	Identification Code
74LVC3G07V8-7	VSSOP-8	V3G07



Package Outline Dimensions


Please see http://www.diodes.com/package-outlines.html for the latest version.

SSOP-8

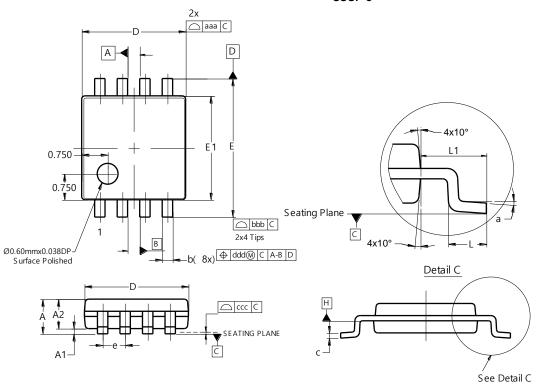

SSOP-8				
Dim	Min	Max	Тур	
Α		1.30		
A1	0.05	0.15		
A2	0.95	1.20	1.05	
Ь	0.15	0.30	0.225	
O	0.08	0.23		
D	2.75	3.15	2.95	
Е	3.75	4.25	4.00	
E1	2.70	2.90	2.80	
е		-	0.65	
ш	0.20	0.60	0.40	
ľ	0.525	0.675	0.60	
а	0°	8°	4°	
aaa	0.20			
bbb	0.25			
CCC	0.10			
ddd	0.13			
All Dimensions in mm				

VSSOP-8

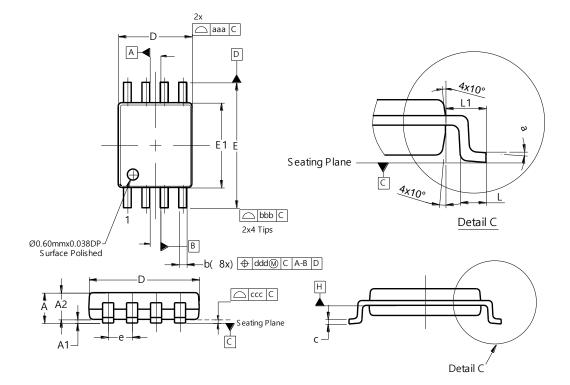


VSSOP-8				
Dim	Min	Max	Тур	
Α	0.60	0.90		
A 1		0.10		
A2	0.60	0.80	-	
b	0.17	0.25	0.21	
С	0.08	0.13	-	
D	1.90	2.10	2.00	
Е	3.20	3.60	3.40	
E1	2.20	2.40	2.30	
е			0.50	
L	0.30	0.40	0.35	
L1	0.50	0.60	0.55	
а	0°	6°	3°	
aaa	0.20			
bbb	0.25			
CCC	0.10			
ddd	0.13			
All Dimensions in mm				



Suggested Pad Layout


Please see http://www.diodes.com/package-outlines.html for the latest version.

SSOP-8



Dimensions	Value (in mm)
C	0.650
X	0.400
X1	2.350
Y	1.100
Y1	4.900

VSSOP-8



Dimensions	Value (in mm)
С	0.500
Х	0.250
X1	1.750
Y	0.750
Y1	4.050

Mechanical Data

SSOP-8

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Mate Tin Plated Leads, Solderable per MIL-STD-202, Method 208 (3)
- Weight: 0.0169 grams (Approximate)

VSSOP-8

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Mate Tin Plated Leads, Solderable per MIL-STD-202, Method 208 (3)
- Weight: 0.011 grams (Approximate)



IMPORTANT NOTICE

- 1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
- 2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
- 3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
- 4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
- 5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- 6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
- 7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
- 8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
- 9. This Notice may be periodically updated with the most recent version available at https://www.diodes.com/about/company/terms-and-conditions/important-notice

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries. All other trademarks are the property of their respective owners.

© 2023 Diodes Incorporated. All Rights Reserved.

www.diodes.com

74LVC3G07 9 of 9
Document number: DS44930 Rev. 3 - 2 www.diodes.com