



20V P-Channel Enhancement Mode MOSFET – ESD Protected

Voltage -20 V Current -1.5A

Features

- RDS(ON), VGS@-4.5V, ID@-1.5A<325m Ω
- R_{DS(ON)} , V_{GS}@-2.5V, I_D@-1.2A<420mΩ
- RDS(ON), VGS@-1.8V, ID@-0.5A<600m Ω
- Advanced Trench Process Technology
- Specially Designed for Switch Load, PWM Application, etc.
- ESD Protected 2KV HBM
- Lead free in comply with EU RoHS 2011/65/EU directives.
- Green molding compound as per IEC61249 Std. (Halogen Free)


Mechanical Data

• Case: SOT-23 Package

Terminals : Solderable per MIL-STD-750, Method 2026

Approx. Weight: 0.0003 ounces, 0.0084 grams

Marking: A31

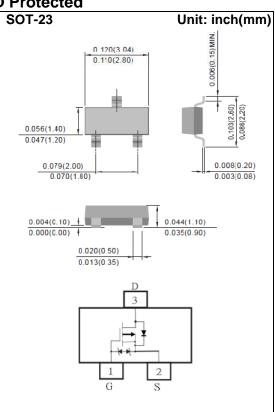

Maximum Ratings and Thermal Characteristics (T_A=25°C unless otherwise noted)

PARAMETER		SYMBOL	LIMIT	UNITS
Drain-Source Voltage		V _{DS}	-20	V
Gate-Source Voltage		V _{GS}	<u>+</u> 8	V
Continuous Drain Current		I _D	-1.5	Α
Pulsed Drain Current (Note 4)		I _{DM}	-4	Α
Power Dissipation	T _a =25°C	P _D	1.25	W
	Derate above 25°C		10	mW/°C
Operating Junction and Storage Temperature Range		TJ,TSTG	-55~150	°C
Typical Thermal resistance - Junction to Ambient (Note 3)		$R_{ heta JA}$	100	°C/W





Electrical Characteristics (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Static			•			
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =-250uA	-20	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	V _{DS} =V _{GS} , I _D =-250uA	-0.5	-0.64	-1.0	V
Drain-Source On-State Resistance	R _{DS(on)}	V _{GS} =-4.5V, I _D =-1.5A	-	240	325	mΩ
		V _{GS} =-2.5V, I _D =-1.2A	-	295	420	
		V _{GS} =-1.8V, I _D =-0.5A	-	405	600	
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-20V, V _{GS} =0V	-	-0.02	-1	uA
Gate-Source Leakage Current	Igss	V _{GS} = <u>+</u> 8V, V _{DS} =0V	-	<u>+</u> 3.5	<u>+</u> 10	uA
Dynamic						
Total Gate Charge	Q_g	V _{DS} =-10V, I _D =-1.5A, V _{GS} =-4.5V (Note 1,2)	-	1.7	-	nC
Gate-Source Charge	Qgs		-	0.35	-	
Gate-Drain Charge	Q_gd		-	0.43	-	
Input Capacitance	Ciss	V _{DS} =-10V, V _{GS} =0V,	-	165	-	pF
Output Capacitance	Coss		-	25	-	
Reverse Transfer Capacitance	Crss	f=1.0MHZ	-	14.7	-	
Switching						
Turn-On Delay Time	td _(on)		-	11	-	ns
Turn-On Rise Time	tr	$V_{DD}\text{=-}10V, \ I_{D}\text{=-}1.5A,$ $V_{GS}\text{=-}4.5V,$ $R_{G}\text{=-}6\Omega \text{ (Note 1,2)}$	-	38	-	
Turn-Off Delay Time	td _(off)		-	130	-	
Turn-Off Fall Time	tf		-	75	-	
Drain-Source Diode						
Maximum Continuous Drain-Source	Is				1.6	А
Diode Forward Current	IS		-	-	-1.6	
Diode Forward Voltage	V _{SD}	I _S =-1.6A, V _{GS} =0V	-	-1.03	-1.2	V

NOTES:

- 1. Pulse width<a>300us, Duty cycle<a>2%
- 2. Essentially independent of operating temperature typical characteristics.
- 3. Rejah is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. Mounted on a 1 inch FR-4 with 2oz.square pad of copper.
- 4. The maximum current rating is package limited.





TYPICAL CHARACTERISTIC CURVES




Fig.1 On-Region Characteristics




Fig.2 Transfer Characteristics




Fig.3 On-Resistance vs. Drain Current




Fig.4 On-Resistance vs. Junction temperature





Fig.5 On-Resistance Variation with V_{GS}







TYPICAL CHARACTERISTIC CURVES




Fig.7 Gate-Charge Characteristics




Fig.8 Threshold Voltage Variation with Temperature




Fig.9 Capacitance vs. Drain-Source Voltage






Part No. Packing Code Version

Part No. Packing Code	Package Type	Packing Type	Marking	Version
PJA3431_R1_00001	SOT-23	3K pcs / 7" reel	A31	Halogen free
PJA3431_R2_00001	SOT-23	12K pcs / 1" reel	A31	Halogen free

Mounting Pad Layout

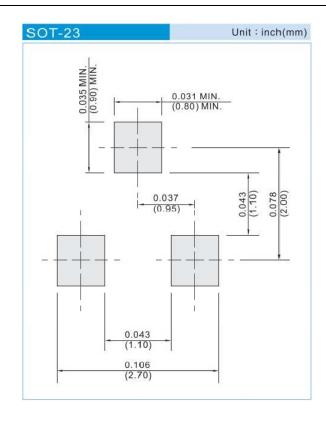





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are
 responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no
 representation or warranty that such applications will be suitable for the specified use without further testing or
 modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.