GOODWORK

80N03NF

N-Ch 30V Fast Switching MOSFETs

Description

The 80N03NF is the high cell density Trench MOSFET, which provide excellent RDSON and gate charge for DC/DC converters application.

The 80N03NF meet the RoHS and Green Product requirement, 100% EAS guaranteed with full function reliability approved.

100% EAS Guaranteed
Green Device Available
Super Low Gate Charge
Low $R_{DS(ON)}$
Advanced high cell density Trench technology





Product Summary

BVDSS	RDSON	ID
30V	4.3mΩ	82A

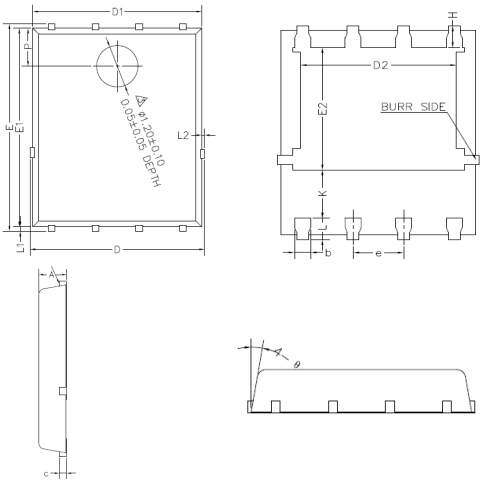

PDFN5X6

Dimensions In Millimeters								
SYMBOL	min	max	SYMBOL	min	max	SYMBOL	min	max
A	0.95	1.20	E	5.9	6.1	L2		0.2
b	0.25	0.40	E1	5.7	5.8	θ		13°
c	0.21	0.34	E2	3.34	3.54	P	1.0	1.2
D		5.1	H	0.51	0.71			
D1	4.8	5.0	K	1.1				
D2	3.91	4.20	L	0.51	0.71			
e	1.17	1.37	L1	0.06	0.2			

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	±20	V
I_D@T_C=25℃	Continuous Drain Current, V_{GS} @ 10V[1]	82	A
I_D@T_C=100℃	Continuous Drain Current, V_{GS} @ 10V[1]	53	A
I_{DM}	Pulsed Drain Current[2]	155	A
EAS	Single Pulse Avalanche Energy[3]	38.8	mJ
I_{AS}	Avalanche Current	34	A
P_D@T_C=25℃	Total Power Dissipation[4]	37	W
T_{STG}	Storage Temperature Range	-55 to 150	℃
T_J	Operating Junction Temperature Range	-55 to 150	℃

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient [1]	---	50	℃/W
$R_{\theta JC}$	Thermal Resistance Junction-Case[1]	---	4.6	℃/W

80N03NF

Electrical Characteristics (T_J=25℃, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V , I_D=250uA	30	---	---	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance[2]	V_{GS}=10V , I_D=20A	---	4.3	6.2	mΩ
		V_{GS}=4.5V , I_D=15A	---	5.7	8	
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS}=V_{DS} , I_D =250uA	1.2	---	2.5	V
I_{DSS}	Drain-Source Leakage Current	V_{DS}=24V , V_{GS}=0V , T_J=25℃	---	---	1	uA
		V_{DS}=24V , V_{GS}=0V , T_J=55℃	---	---	5	
I_{GSS}	Gate-Source Leakage Current	V_{GS}=±20V , V_{DS}=0V	---	---	±100	nA
gfs	Forward Transconductance	V_{DS}=5V , I_D=20A	---	67	---	S
R_g	Gate Resistance	V_{DS}=0V , V_{GS}=0V , f=1MHz	---	1.7	---	Ω
Q_g	Total Gate Charge (4.5V)	V_{DS}=15V , V_{GS}=4.5V , I_D=15A	---	8	---	nC
Q_{gs}	Gate-Source Charge		---	2.4	---	
Q_{gd}	Gate-Drain Charge		---	3.2	---	
$T_{d(on)}$	Turn-On Delay Time	V_{DD}=15V , V_{GS}=10V , R_G=3.3Ω , I_D=15A	---	7.1	---	ns
T_r	Rise Time		---	40	---	
$T_{d(off)}$	Turn-Off Delay Time		---	15	---	
T_f	Fall Time		---	6	---	
C_{iss}	Input Capacitance	V_{DS}=15V , V_{GS}=0V , f=1MHz	---	814	---	pF
C_{oss}	Output Capacitance		---	498	---	
C_{rss}	Reverse Transfer Capacitance		---	41	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current[1,6]	V_G=V_D=0V , Force Current	---	---	82	A
V_{SD}	Diode Forward Voltage[2]	V_{GS}=0V , I_S=1A , T_J=25℃	---	---	1	V
t_{rr}	Reverse Recovery Time	I_F=20A , di/dt=100A/μs , T_J=25℃	---	15	---	nS
Q_{rr}	Reverse Recovery Charge		---	25	---	nC

Note :
1.The data tested by surface mounted on a 1 inch^2 FR-4 board with 2OZ copper.
2.The data tested by pulsed , pulse width ≦ 300us , duty cycle ≦ 2%
3.The EAS data shows Max. rating . The test condition is V_{DD}=25V,V_{GS}=10V,L=0.1mH,I_{AS}=24A
4.The power dissipation is limited by 150℃ junction temperature
5.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

RATING AND CHARACTERISTIC CURVES (80N03NF)

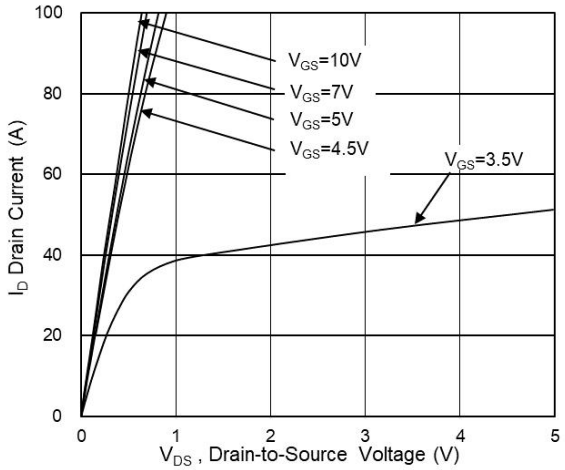

Fig.1 Typical Output Characteristics

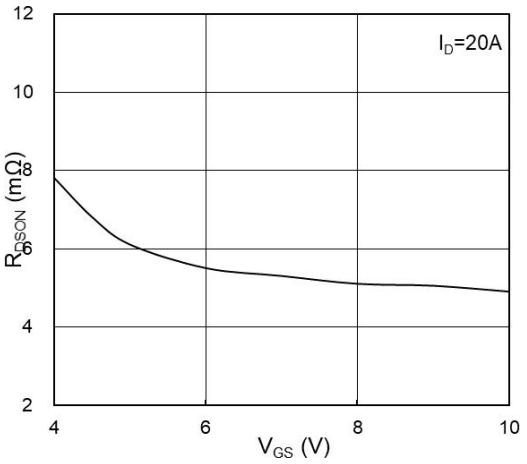

Fig.2 On-Resistance vs G-S Voltage

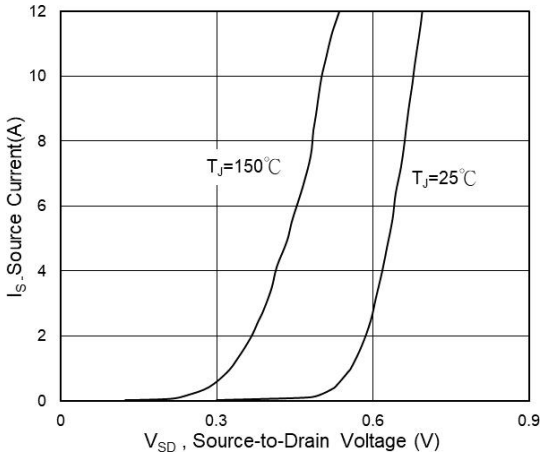

Fig.3 Source Drain Forward Characteristics

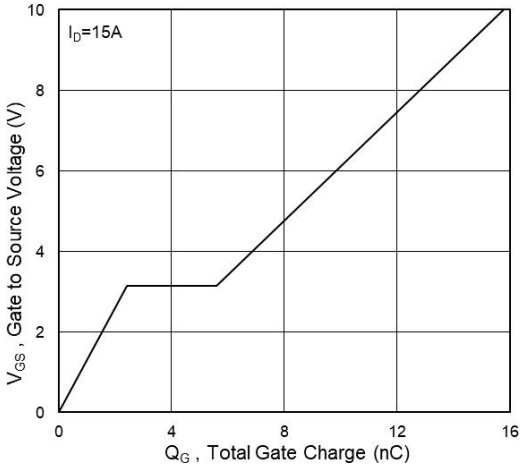

Fig.4 Gate-Charge Characteristics

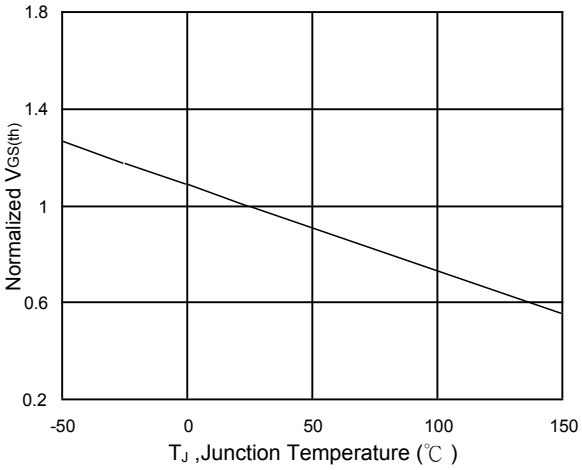

Fig.5 Normalized $V_{GS(th)}$ vs T_J

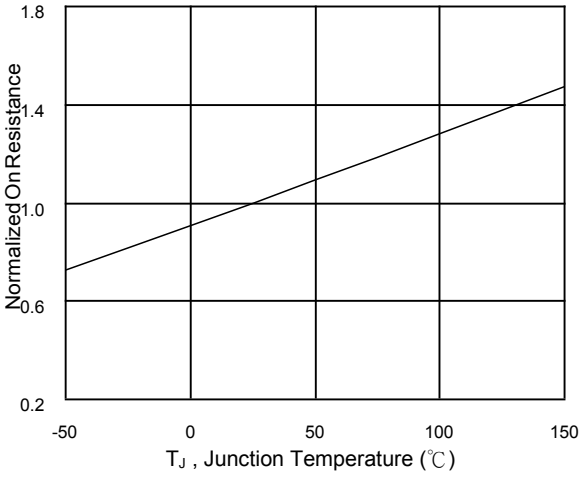

Fig.6 Normalized R_{DSON} vs T_J

RATING AND CHARACTERISTIC CURVES (80N03NF)

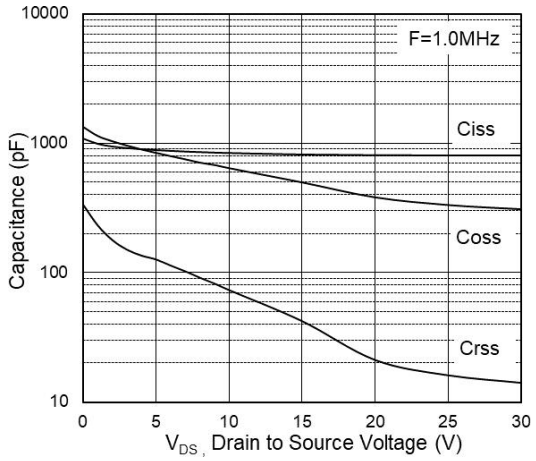

Fig.7 Capacitance

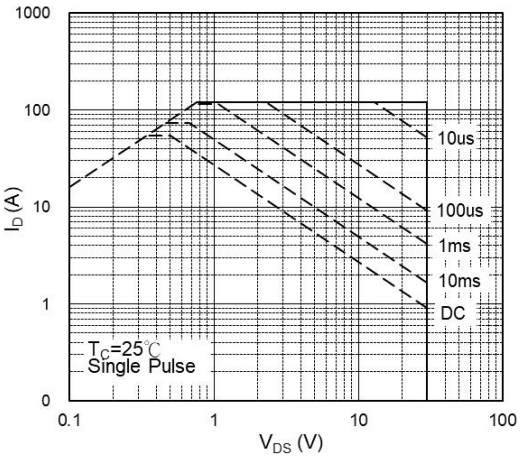

Fig.8 Safe Operating Area

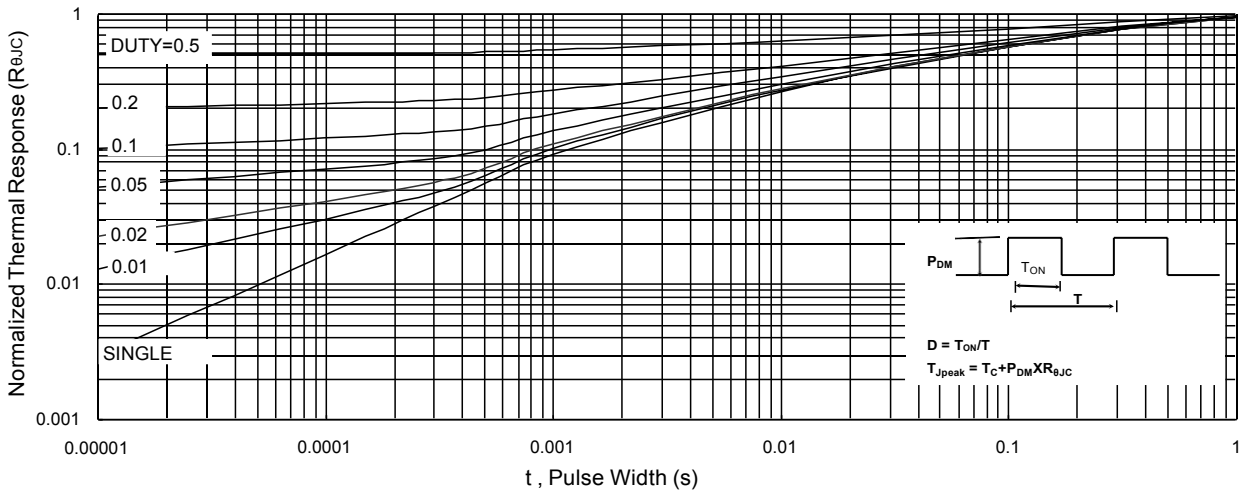

Fig.9 Normalized Maximum Transient Thermal Impedance

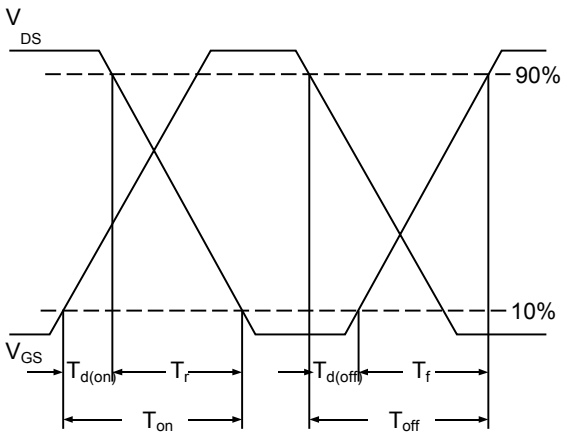

Fig.10 Switching Time Waveform

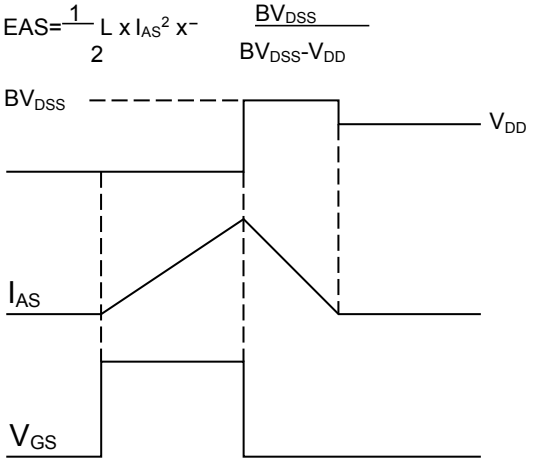

Fig.11 Unclamped Inductive Switching Waveform