SIEMENS

3RW5075-2AB15 **Data sheet**



SIRIUS soft starter 200-600 V 370 A, 110-250 V AC Spring-loaded terminals Analog output

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW50
manufacturer's article number	
 of standard HMI module usable 	3RW5980-0HS01
 of high feature HMI module usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
 of circuit breaker usable at 500 V 	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
 of the gG fuse usable up to 690 V 	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1 334-2; Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NE3 336; Type of coordination 2, Iq = 65 kA
 of line contactor usable up to 480 V 	<u>3RT1075</u>
 of line contactor usable up to 690 V 	<u>3RT1075</u>
General technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 20 s
ramp-down time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
accuracy class according to IEC 61557-12	5 %
certificate of suitability	
CE marking	Yes
 UL approval 	Yes
CSA approval	Yes
product component	
HMI-High Feature	No
 is supported HMI-Standard 	Yes
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	2
trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2

buffering time in the event of power failure	
for main current circuit	100 ms
for control circuit	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
between main and auxiliary circuit	600 V
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
utilization category according to IEC 60947-4-2	AC-53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	09/23/2019
product function	
ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
Soft Torque	Yes
adjustable current limitation	Yes
pump ramp down	Yes
intrinsic device protection	Yes
motor overload protection	Yes; Electronic motor overload protection
evaluation of thermistor motor protection	No
auto-RESET	Yes
manual RESET	Yes
• remote reset	Yes; By turning off the control supply voltage
communication function	Yes
operating measured value display	Yes; Only in conjunction with special accessories
error logbook	Yes; Only in conjunction with special accessories
via software parameterizable	No
via software configurable	Yes
• PROFlenergy	Yes; in connection with the PROFINET Standard communication module
voltage ramp	Yes
• torque control	No
analog output	Yes; 4 20 mA (default) / 0 10 V (parameterizable with High Feature HMI)
Power Electronics	
operational current	
at 40 °C rated value	370 A
• at 50 °C rated value	328 A
at 60 °C rated value	300 A
operating voltage	
rated value	200 600 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
operating power for 3-phase motors	
 at 230 V at 40 °C rated value 	110 kW
 at 400 V at 40 °C rated value 	200 kW
 at 500 V at 40 °C rated value 	250 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
adjustable motor current	
 at rotary coding switch on switch position 1 	160 A
 at rotary coding switch on switch position 2 	174 A
 at rotary coding switch on switch position 3 	188 A
·	

 at rotary coding switch on switch position 4 	202 A
 at rotary coding switch on switch position 5 	216 A
 at rotary coding switch on switch position 6 	230 A
 at rotary coding switch on switch position 7 	244 A
at rotary coding switch on switch position 8	258 A
at rotary coding switch on switch position 9	272 A
,	
at rotary coding switch on switch position 10	286 A
 at rotary coding switch on switch position 11 	300 A
 at rotary coding switch on switch position 12 	314 A
 at rotary coding switch on switch position 13 	328 A
 at rotary coding switch on switch position 14 	342 A
 at rotary coding switch on switch position 15 	356 A
 at rotary coding switch on switch position 16 	370 A
• minimum	160 A
minimum load [%]	15 %; Relative to smallest settable le
power loss [W] for rated value of the current at AC	
• at 40 °C after startup	36 W
at 50 °C after startup	29 W
at 60 °C after startup	24 W
power loss [W] at AC at current limitation 350 %	27 VV
	2.726 W
• at 40 °C during startup	3 726 W
• at 50 °C during startup	3 124 W
at 60 °C during startup	2 748 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
● at 50 Hz	110 250 V
● at 60 Hz	110 250 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply current in standby mode rated value	30 mA
holding current in bypass operation rated value	105 mA
locked-rotor current at close of bypass contact maximum	2.2 A
inrush current peak at application of control supply voltage maximum	12.2 A
duration of inrush current peak at application of control supply voltage	2.2 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature
	circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
number of digital outputs	3
not parameterizable	2
digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
omitoring capacity current of the relay outputs	
at AC-15 at 250 V rated value	3 A

• at DC-13 at 24 V rated value	1 A
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
height	230 mm
width	160 mm
depth	282 mm
required spacing with side-by-side mounting	
forwards	10 mm
backwards	0 mm
• upwards	100 mm
downwards	75 mm
at the side	5 mm
weight without packaging	7.3 kg
Connections/ Terminals	
type of electrical connection	
for main current circuit	busbar connection
for control circuit	spring-loaded terminals
width of connection bar maximum	35 mm; with connection cover 3RT1966-4EA1 maximum length 45 mm
type of connectable conductor cross-sections	
 for main contacts for box terminal using the front clamping point solid 	95 300 mm²
 for main contacts for box terminal using the front clamping point finely stranded with core end processing 	70 240 mm²
 for main contacts for box terminal using the front clamping point finely stranded without core end processing 	70 240 mm²
 for main contacts for box terminal using the front clamping point stranded 	95 300 mm²
 at AWG cables for main contacts for box terminal using the front clamping point 	3/0 600 kcmil
 for main contacts for box terminal using the back clamping point solid 	120 240 mm²
 at AWG cables for main contacts for box terminal using the back clamping point 	250 500 kcmil
for main contacts for box terminal using both clamping points solid	min. 2x 70 mm², max. 2x 240 mm²
 for main contacts for box terminal using both clamping points finely stranded with core end processing 	min. 2x 50 mm², max. 2x 185 mm²
 for main contacts for box terminal using both clamping points finely stranded without core end processing 	min. 2x 50 mm², max. 2x 185 mm²
 for main contacts for box terminal using both clamping points stranded 	min. 2x 70 mm², max. 2x 240 mm²
 for main contacts for box terminal using the back clamping point finely stranded with core end processing 	120 185 mm²
 for main contacts for box terminal using the back clamping point finely stranded without core end processing 	120 185 mm²
for main contacts for box terminal using the back clamping point stranded	120 240 mm²
type of connectable conductor cross-sections	
 at AWG cables for main current circuit solid 	2/0 500 kcmil
 for DIN cable lug for main contacts stranded 	50 240 mm²
for DIN cable lug for main contacts finely stranded	70 240 mm²
type of connectable conductor cross-sections	
 for control circuit solid 	2x (0.25 1.5 mm²)
 for control circuit finely stranded with core end processing 	2x (0.25 1.5 mm²)
 at AWG cables for control circuit solid 	2x (24 16)
 at AWG cables for control circuit finely stranded with 	2x (24 16)

core end processing	
wire length	
between soft starter and motor maximum	800 m
at the digital inputs at AC maximum	1 000 m
tightening torque	
for main contacts with screw-type terminals	14 24 N·m
 for auxiliary and control contacts with screw-type 	0.8 1.2 N·m
terminals	
tightening torque [lbf·in]	404 040 51
for main contacts with screw-type terminals for auxiliary and control contacts with account type	124 210 lbf·in
 for auxiliary and control contacts with screw-type terminals 	7 10.3 lbf·in
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; derating as of 1000 m, see Manual
ambient temperature	·
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or
	above
during storage and transport	-40 +80 °C
environmental category	
 during operation according to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
 during storage according to IEC 60721 	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must
3 3	not get inside the devices), 1M4
during transport according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
 PROFINET standard 	Yes
EtherNet/IP	Yes
Modbus RTU	Yes
Modbus TCP	Yes
PROFIBUS	Yes
UL/CSA ratings	
manufacturer's article number	
• of the fuse	T 01 1 4000 A 1 401 A
 usable for Standard Faults up to 575/600 V according to UL 	Type: Class L, max. 1200 A; Iq = 18 kA
— usable for High Faults up to 575/600 V	Type: Class L, max. 1200 A; Iq = 100 kA
according to UL	71
operating power [hp] for 3-phase motors	
 at 200/208 V at 50 °C rated value 	100 hp
 at 220/230 V at 50 °C rated value 	125 hp
• at 460/480 V at 50 °C rated value	250 hp
at 575/600 V at 50 °C rated value	300 hp
Safety related data	
protection class IP on the front according to IEC 60529	IP00; IP20 with cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover
ATEX	
certificate of suitability	
• ATEX	Yes
• IECEx	Yes
hardware fault tolerance according to IEC 61508 relating to ATEX	0
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.09
PFHD with high demand rate according to EN 62061 relating to ATEX	9E-6 1/h
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 y

Certificates/ approvals

General Product Approval

For use in hazardous locations





Confirmation







For use in hazardous locations Declaration of Conformity

Test Certificates

Marine / Shipping





Type Test Certificates/Test Report







other

Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5075-2AB15

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5075-2AB15

 $Service \& Support \ (Manuals, Certificates, Characteristics, FAQs, ...)$

https://support.industry.siemens.com/cs/ww/en/ps/3RW5075-2AB15

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5075-2AB15&lang=en

Characteristic: Tripping characteristics, I^2t , Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5075-2AB15/char

Characteristic: Installation altitude

 $\underline{\text{http://www.automation.siemens.com/bilddb/index.aspx?view=Search\&mlfb=3RW5075-2AB15\&objecttype=14\&gridview=view1}$

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

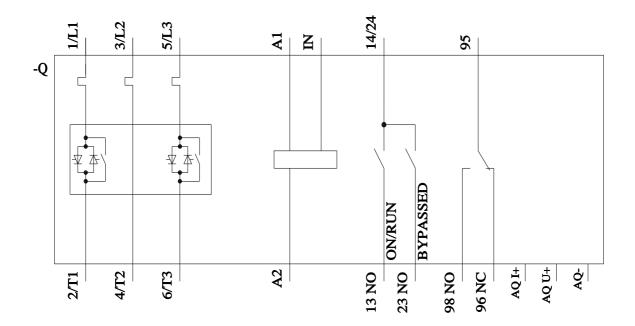

last modified: 4/11/2022 🖸