SIEMENS

Data sheet

US2:17DUB82NS11



Non-reversing motor starter, Size 1, Three phase full voltage, Solid-state overload relay, OLR amp range 0.75-3.4A, 24VDC coil, Combination type, 30A fusible disconnect, 30A/600V fuse clip, Enclosure NEMA type 4/12, Water/dust tight for outdoors, Extra-wide enclosure

| - | - | | | 11 |
|---|----|-----|-----|------|
| | au | res | sim | ilar |
| | - | | | |

| product brand name | Class 17 | |
|--|---|--|
| design of the product | Non-reversing motor starter with fusible disconnect | |
| special product feature | ESP200 overload relay | |
| General technical data | | |
| weight [lb] | 47 lb | |
| Height x Width x Depth [in] | 24 × 20 × 8 in | |
| touch protection against electrical shock | NA for enclosed products | |
| installation altitude [ft] at height above sea level maximum | 6560 ft | |
| ambient temperature [°F] | | |
| during storage | -22 +149 °F | |
| during operation | -4 +104 °F | |
| ambient temperature | | |
| during storage | -30 +65 °C | |
| during operation | -20 +40 °C | |
| country of origin | USA | |
| Horsepower ratings | _ | |
| yielded mechanical performance [hp] for 3-phase AC motor | | |
| at 200/208 V rated value | 0 hp | |
| at 220/230 V rated value | 0 hp | |
| at 460/480 V rated value | 1.5 hp | |
| at 575/600 V rated value | 2 hp | |
| Contactor | | |
| size of contactor | NEMA controller size 1 | |
| number of NO contacts for main contacts | 3 | |
| operating voltage for main current circuit at AC at 60 Hz maximum | 600 V | |
| operational current at AC at 600 V rated value | 27 A | |
| mechanical service life (switching cycles) of the main contacts typical | 1000000 | |
| Auxiliary contact | | |
| number of NC contacts at contactor for auxiliary contacts | 0 | |
| number of NO contacts at contactor for auxiliary contacts | 1 | |
| number of total auxiliary contacts maximum | 8 | |
| contact rating of auxiliary contacts of contactor according to UL | 10A@600VAC (A600), 5A@600VDC (P600) | |
| Coil | | |
| type of voltage of the control supply voltage | DC | |
| control supply voltage | | |

| e at DC rated value | 24 V |
|---|--------------------------------------|
| • at DC rated value holding power at AC minimum | 24 V 0 W |
| | 163 VA |
| apparent pick-up power of magnet coil at AC | 5.5 VA |
| apparent holding power of magnet coil at AC operating range factor control supply voltage rated value | 0.85 1.1 |
| of magnet coil | |
| percental drop-out voltage of magnet coil related to the input voltage | 25 % |
| ON-delay time | 21 21 ms |
| OFF-delay time | 11 11 ms |
| Overload relay | _ |
| product function | |
| overload protection | Yes |
| phase failure detection | Yes |
| asymmetry detection | Yes |
| ground fault detection | Yes |
| test function | Yes |
| external reset | Yes |
| reset function | Manual, automatic and remote |
| trip class | CLASS 5 / 10 / 20 (factory set) / 30 |
| adjustable current response value current of the current- dependent overload release | 0.75 3.4 A |
| tripping time at phase-loss maximum | 3 s |
| relative repeat accuracy | 1 % |
| product feature protective coating on printed-circuit board | Yes |
| number of NC contacts of auxiliary contacts of overload relay | 1 |
| number of NO contacts of auxiliary contacts of overload relay | 1 |
| operational current of auxiliary contacts of overload relay | |
| • at AC at 600 V | 5 A |
| • at DC at 250 V | 1 A |
| contact rating of auxiliary contacts of overload relay according to UL | 5A@600VAC (B600), 1A@250VDC (R300) |
| insulation voltage (Ui) | |
| with single-phase operation at AC rated value | 600 V |
| with multi-phase operation at AC rated value | 300 V |
| Disconnect Switch | |
| response value of switch disconnector | 30A / 600V |
| design of fuse holder | Class R fuse clips |
| operating class of the fuse link | Class R |
| Enclosure | |
| degree of protection NEMA rating | 4, 12 |
| design of the housing | dustproof, waterproof & weatherproof |
| Mounting/wiring | |
| mounting position | vertical |
| fastening method | Surface mounting and installation |
| type of electrical connection for supply voltage line-side | Box lug |
| tightening torque [lbf·in] for supply | 35 35 lbf·in |
| type of connectable conductor cross-sections at line-side | 1x (14 2 AWG) |
| at AWG cables single or multi-stranded temperature of the conductor for supply maximum | 75 °C |
| permissible material of the conductor for supply | AL or CU |
| | |
| type of electrical connection for load-side outgoing feeder | Screw-type terminals |
| tightening torque [lbf·in] for load-side outgoing feeder type of connectable conductor cross-sections at AWG | 20 24 lbf·in 2x (14 10 AWG) |
| cables for load-side outgoing feeder single or multi- stranded | |
| | 75 °C |


| type of electrical connection of magnet coil | Screw-type terminals |
|---|---|
| | 5 12 lbf·in |
| tightening torque [lbf·in] at magnet coil | |
| type of connectable conductor cross-sections of magnet coil at AWG cables single or multi-stranded | 2x (16 12 AWG) |
| temperature of the conductor at magnet coil maximum permissible | 75 °C |
| material of the conductor at magnet coil | CU |
| type of electrical connection for auxiliary contacts | Screw-type terminals |
| tightening torque [lbf·in] at contactor for auxiliary contacts | 10 15 lbf·in |
| type of connectable conductor cross-sections at contactor at AWG cables for auxiliary contacts single or multi- stranded | 1x (12 AWG), 2x (16 14 AWG), 2x (18 16 AWG) |
| temperature of the conductor at contactor for auxiliary contacts maximum permissible | 75 °C |
| material of the conductor at contactor for auxiliary contacts | CU |
| type of electrical connection at overload relay for auxiliary contacts | Screw-type terminals |
| tightening torque [lbf·in] at overload relay for auxiliary contacts | 7 10 lbf·in |
| type of connectable conductor cross-sections at overload relay at AWG cables for auxiliary contacts single or multi- stranded | 2x (20 14 AWG) |
| temperature of the conductor at overload relay for auxiliary contacts maximum permissible | 75 °C |
| material of the conductor at overload relay for auxiliary contacts | CU |
| Short-circuit current rating | |
| design of the fuse link for short-circuit protection of the main circuit required | 10kA@600V (Class H or K); 100kA@600V (Class R or J) |
| certificate of suitability | NEMA ICS 2; UL 508; CSA 22.2, No.14 |
| Further information | |
| Industrial Controls - Product Overview (Catalogs, Brochu www.usa.siemens.com/iccatalog Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/us/Catalog/product | |

nup semens JIII/IIIai

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/US/en/ps/US2:17DUB82NS11

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:17DUB82NS11&lang=en Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:17DUB82NS11/certificate

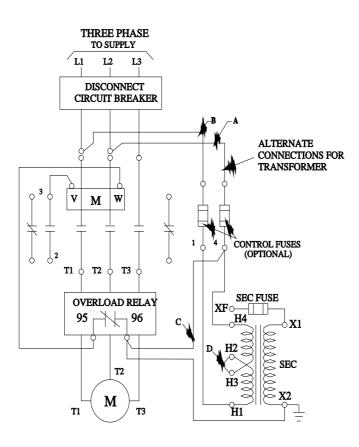

D68782001

last modified:

1/25/2022 🖸