



## Elevated Feed Point Antennas

### for LMR, Cellular and GSM

ELEVATED FEED POINT ANTENNAS PROVIDE CLEAR OMNI-DIRECTIONAL SIGNALS OVER VERTICAL OBSTACLES

Laird's Elevated Feed Point mobile antennas provide optimal RF coverage, when installation requirements include light bars or other vertical impediments to optimal omni-directional coverage. These antennas are the ideal solution for public safety and limousine trunk mount applications. Models are available in UHF and 800/900 MHz frequencies, in black or chrome finish.


### FEATURES

- True Field Diversity design ensures uninterrupted transmissions in urban canyons and rural drop off areas
- Phantom® outperforms a 3dB whip in many applications
- U.S. Patent Nos. 5,977,931 - 6,292,156 and 7,209,096

### MARKETS

- Public safety
- Transportation
- Utility
- Military mobile
- Fixed radio applications

### TYPICAL 3DBI ANTENNA PATTERNS

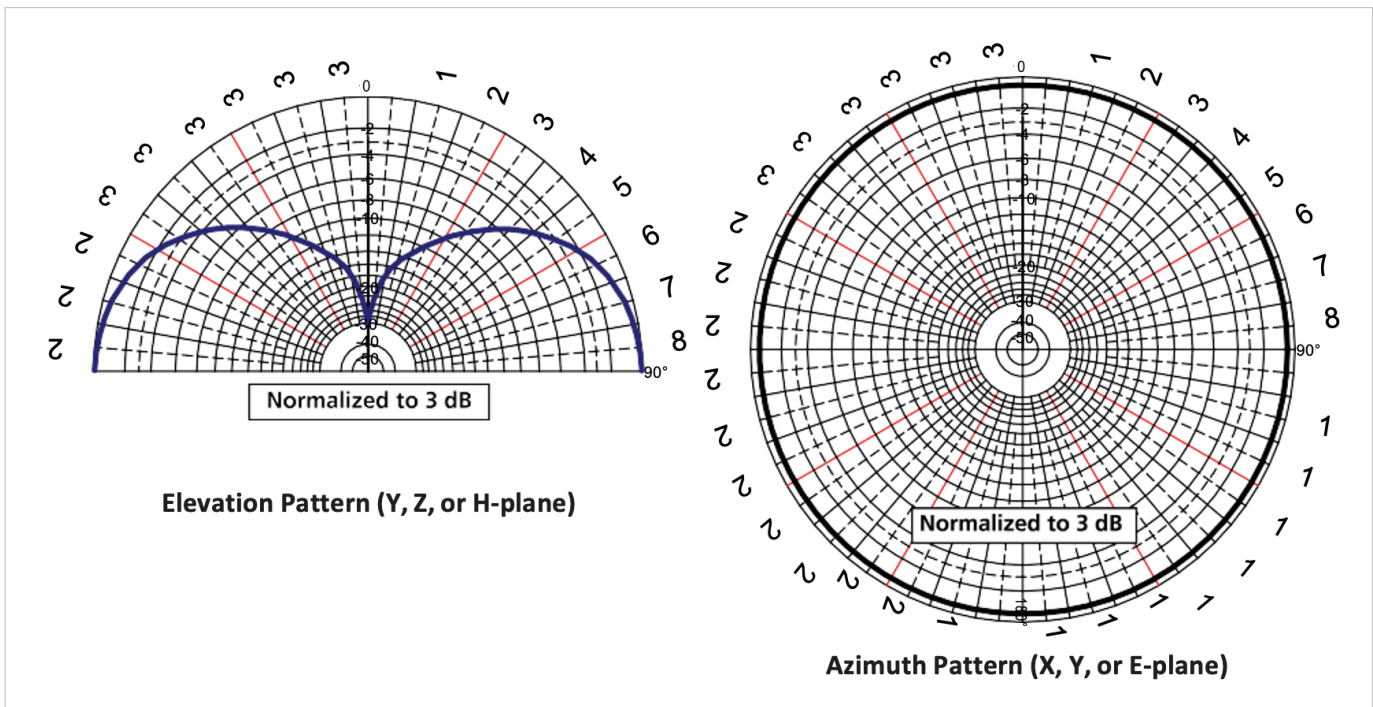

## SPECIFICATIONS

ELECTRICAL	
VSWR	2:1
Nominal Gain	3 dB
Maximum Power	200 W
Nominal Impedance	50 $\Omega$
Polarization	Vertical
Pattern	Omnidirectional
Half-Power Beamwidth (Elevation° x Azimuth°)	70° x 360°
Coaxial Cable Length & Type	None
Terminations	NMO

MECHANICAL	
Color	Chrome or Black
Height	See Form Factor
Diameter	1.44"
Weight	< 0.5 lb
Material	ABS
Mounting Information	NMO or Permanent Mountable
Noise Suppressor (Optional)	BlackHawk NS1535 1-35 VOLT, 15 Amp Noise Suppressor (Sold Separately)

MODEL	DESCRIPTION	GAIN
E(B)4500	450-512 MHz, Elevated Feed	Unity
E(B)4503C	450-470 MHz, Closed Coil, Elevated Feed	3 dBi
E(B)7603	760-870 MHz, Open Coil, Elevated Feed	3 dBi
E(B)7603C	760-870 MHz, Closed Coil, Elevated Feed	3 dBi
E(B)8063	806-896 MHz, Open Coil, Elevated Feed	3 dBi
E(B)8063C	806-896 MHz, Closed Coil, Elevated Feed	3 dBi
E(B)8065C	806-896 MHz, Closed Coil, Elevated Feed	5 dBi
E(B)8965C	896-970 MHz, Closed Coil, Elevated Feed	5 dBi

---

## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

## te.com

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

©2021 TE Connectivity. All Rights Reserved.

12/21 Original